WhisperCeiling® DC™
VENTILATION FAN

FV-1115VQ1

Specification Submittal Data / Panasonic Precision Spot Ventilation Fan

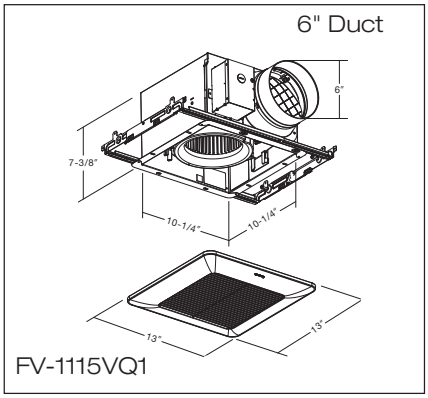

Description:

Ventilating fan shall be Low Noise ceiling mount type rated for continuous run. Fan shall be ENERGY STAR® rated and certified by the Home Ventilation Institute (HVI). Evaluated by Underwriters Laboratories and conform to both UL and cUL safety standards.

Motor/Blower:

- Enclosed brushless ECM motor technology rated for continuous run.
- Fan ventilation rates shall be manually adjustable for 110-130-150 CFM.
- Power rating shall be 120 volts and 60 Hz.
- Fan shall be UL and cUL listed for tub/shower enclosure when GFCI protected ~~and used in insulated ceiling (TYPE I.C.).~~
- Motor equipped with thermal–cutoff fuse.
- Removable with permanently lubricated plug-in motor.

Housing:

- 26 gauge Zinc-Aluminum-Magnesium (ZAM) housing.
- Integrated 6" duct adapter.
- Built-in damper reduces back drafting and helps with blower door testing.
- Built-in metal flange provides blocking for penetrations through drywall as an Air Barrier, and assists with the decrease in leakage in the Building Envelope during blower door testing.
- Articulating and expandable installation bracket up to 24".

Ceiling Radiation Damper:

- WhisperCeiling® DC™ is UL listed for use with the Panasonic Ceiling Radiation Damper (Model #: PC-RD05C5, sold separately).

Grille:

- Attractive design using Poly Pro material.
- Attaches directly to housing with torsion springs.

Warranty:

- ECM Motor: 6 Years from original purchase date.
- ALL Parts: 3 Years from original purchase date.

Architectural Specifications:

Ventilation fan shall be UL and cUL listed for ceiling mount and tub/shower enclosure when GFCI protected. Fan shall also be ENERGY STAR® certified, with a built-in speed selector. Choose from 110-130-150 CFM and no more than <0.3/<0.3/<0.3 sone as certified by the Home Ventilating Institute (HVI) at 0.1 static pressure in inches water gauge (w.g.) with no less than 110-131-152 CFM and no more than <0.3/0.5/0.7 sone as certified by HVI at 0.25 w.g. Power Consumption shall be no greater than 6.8/9.0/11.8 watts at 0.1 w.g. and 12.1/15.7/20.2 watts at 0.25 w.g., with efficiency of no less than 16.4/14.7/12.9 CFM/watt at 0.1 w.g. and 9.2/8.5/7.6 CFM/watt at 0.25 w.g. The motor shall be totally enclosed with a brushless ECM motor engineered to run continuously. ECM motor speed shall automatically increase when the fan senses static pressure to maintain selected CFM. Power rating shall be 120V/60Hz. Duct diameter shall be no less than 6". Fan can be used to comply with ASHRAE 62.2, LEED, ENERGY STAR® IAP, EarthCraft, CA Title 24 and WA state code.

Specifications: **WhisperCeiling DC** FV-1115VQ1		6"		6"		6"	
Ventilation Fan Characteristics (HVI Certified Data)	Static Pressure in inches w.g.	0.1	0.25	0.1	0.25	0.1	0.25
	Air Volume (CFM)	150	152	130	131	110	110
	Noise (sones)	<0.3	0.7	<0.3	0.5	<0.3	<0.3
	Power Consumption (watts)	11.8	20.2	9.0	15.7	6.8	12.1
	Energy Efficiency (CFM/Watt)	12.9	7.6	14.7	8.5	16.4	9.2
	Speed (RPM)	698	925	671	918	636	900
	Current (amps)	0.19	0.31	0.16	0.25	0.12	0.20
	MAX. Current (amps)	0.31					
	Power Rating (V/Hz)	120/60					
	ENERGY STAR rated	Yes					

0.25=Installed Performance

Performance Curve 6" Duct

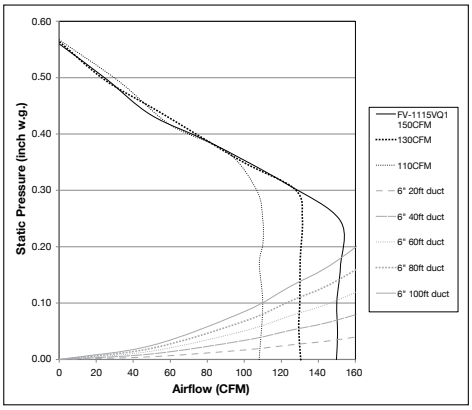

For complete Installation Instructions visit **us.panasonic.com/ventfans**

Model	Quantity	Comments	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

Panasonic Eco Solutions North America
Eco Products Division
Two Riverfront Plaza
Newark, NJ 07102

us.panasonic.com/ventfans

ECM Motor Technology
When the fan senses static pressure, its speed is automatically increased to ensure that the desired CFM is not compromised, which allows the fan to perform as rated.

Most Efficient 2017

Panasonic