



SERVICE PARTS LIST

BULLETIN NO.
54-40-7071

SPECIFY CATALOG NO. AND SERIAL NO. WHEN ORDERING PARTS

M18™ FUEL™ 5-3/8" METAL CUTTING SAW

REVISED BULLETIN

54-40-7070

DATE

Sept. 2018

CATALOG NO. 2782-20

**STARTING
SERIAL NO.**

H87B

WIRING INSTRUCTION

See Page Three

EXAMPLE:
Component Parts (Small #)
Are Included When Ordering
The Assembly (Large #).


LUBRICATION:

Type 'Y' Grease, No. 49-08-5270

Liberally coat the teeth of the
Rotor Pinion (55).

Lightly coat the rotor bearing bore
of the Diaphragm (54) prior to
installing rotor (55).

Fill back end of Gear Housing
Cover (52) with grease, making
sure that the teeth of gear
are completely covered.

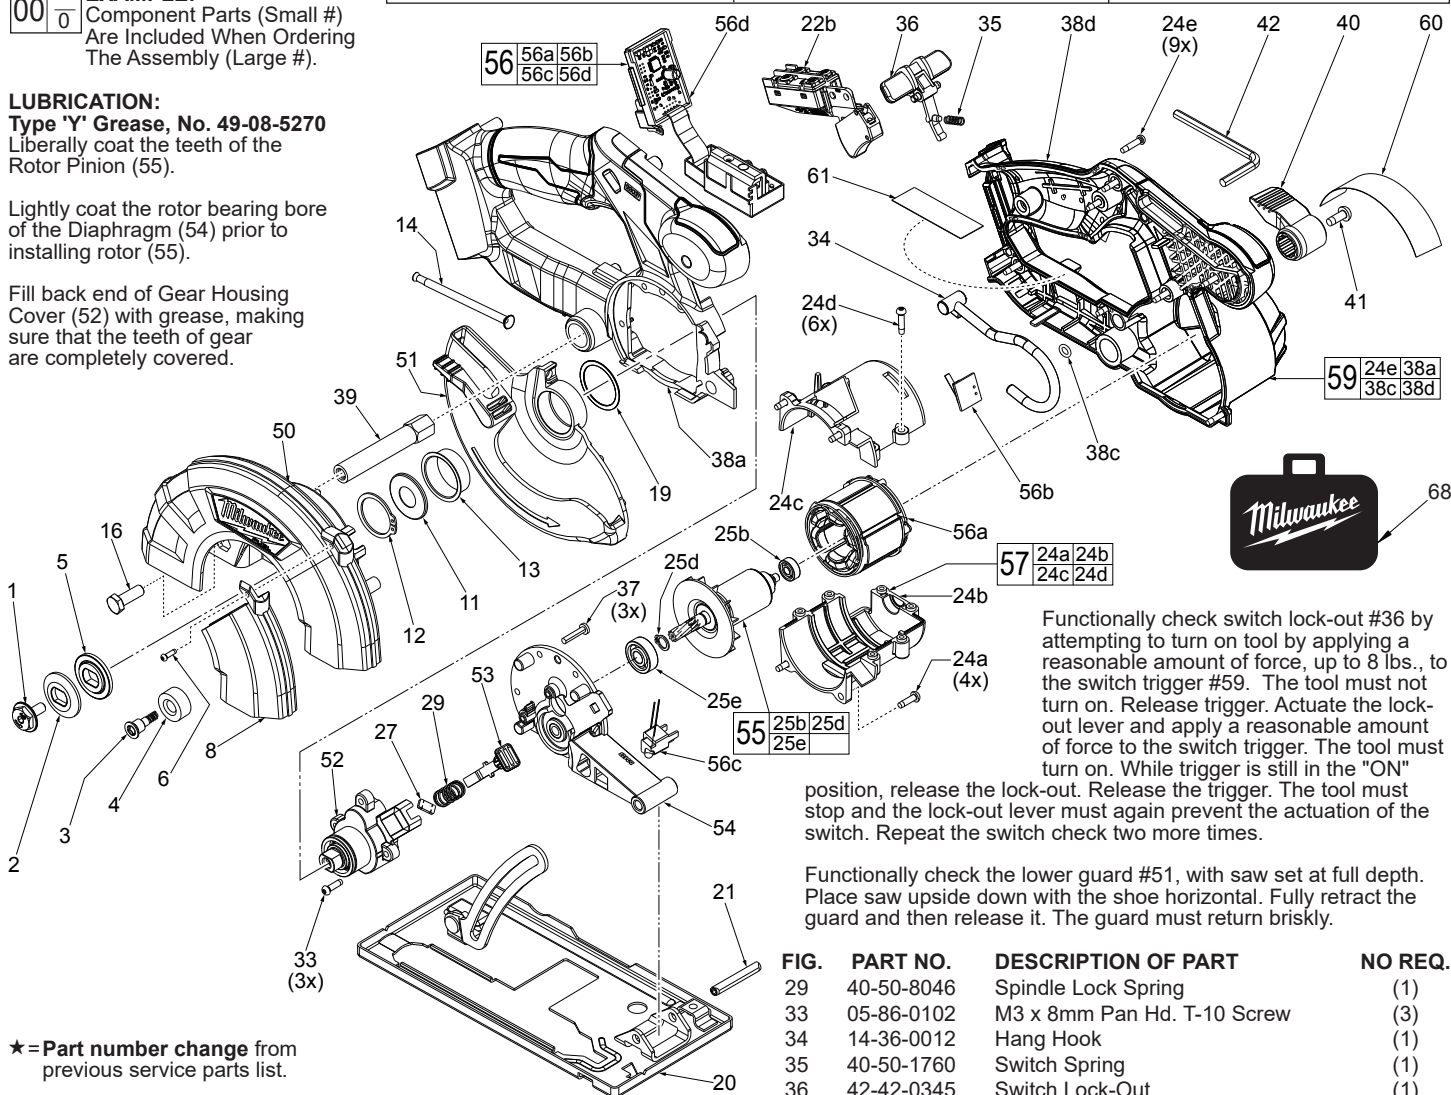

★ = Part number change from
previous service parts list.





FIG.	PART NO.	DESCRIPTION OF PART	NO REQ.
1	45-04-1020	Hex Flange Blade Screw	(1)
2	43-34-0685	Outer Blade Flange	(1)
3	45-04-1060	Bumper Screw	(1)
4	42-38-0222	Rubber Bumper	(1)
5	43-34-0680	Inner Blade Flange	(1)
6	05-81-0005	M3 x 8mm Pan Hd. T-10 ST Screw	(1)
8	44-06-0201	Transparent Window	(1)
11	45-88-3095	Dust Seal	(1)
12	34-60-0006	Retaining Ring	(1)
13	45-22-0282	Sleeve	(1)
14	40-50-1710	Lower Guard Return Spring	(1)
16	06-75-5860	1/4-20 x .75 UNC Hex Hd. Bolt	(1)
19	45-88-0087	Flat Washer	(1)
20	14-74-0235	Shoe Assembly	(1)
21	06-65-0029	Spring Pin	(1)
22b	23-66-2635	On-Off Switch with Screws	(1)
24a	06-82-5285	6-32 x .5 Pan Hd. Taptite T-15 Screw	(4)
24b	-----	Motor Insulator Halve - Bottom	(1)
24c	-----	Motor Insulator Halve - Top	(1)
24d	06-82-2025	M3.5 x 16mm Pan Hd. Platite T-10 Screw	(6)
24e	06-82-2025	M3.5 x 16mm Pan Hd. Platite T-10 Screw	(9)
25b	02-04-0033	Ball Bearing	(1)
25d	34-80-0020	C-Retaining Ring	(1)
25e	02-04-0175	Ball Bearing	(1)
27	43-84-0012	Spindle Lock Felt	(1)

FIG.	PART NO.	DESCRIPTION OF PART	NO REQ.
29	40-50-8046	Spindle Lock Spring	(1)
33	05-86-0102	M3 x 8mm Pan Hd. T-10 Screw	(3)
34	14-36-0012	Hang Hook	(1)
35	40-50-1760	Switch Spring	(1)
36	42-42-0345	Switch Lock-Out	(1)
37	06-82-7261	6-19 x .687 Pan Hd. Plast. T-15 Screw	(3)
38a	31-44-1205	Housing Halve - Right	(1)
38c	34-40-4480	O-Ring	(1)
38d	31-44-1207	Housing Halve - Left with Spring Plungers	(1)
39	42-18-0405	Hexagon Depth Lever Shaft	(1)
40	44-10-0018	Depth Lever	(1)
41	06-82-5314	10-24 x 1/2" Pan Hd. Tapt. T-25 Screw	(1)
42	49-96-0600	3/16" Hex Key	(1)
50	43-54-0003	Upper Guard Assembly	(1)
51	28-41-0031	Lower Guard Assembly	(1)
★ 52	28-14-0008	Gear Case Assembly	(1)
53	44-20-0012	Spindle Lock Button/Plate Assembly	(1)
54	14-13-0032	Diaphragm Assembly w/ Needle Bearing	(1)
★ 55	16-01-0103	Rotor Assembly	(1)
56	14-20-0203	Electronic Assembly	(1)
56a	-----	Stator	(1)
56b	-----	Micro Switch with PCBA	(1)
56c	22-06-2782	LED Assembly	(1)
56d	-----	Battery Connector Block with PCBA	(1)
57	31-50-0307	Motor Insulator Assembly	(1)
59	31-44-1209	Housing Assembly	(1)
60	12-20-0212	Service Nameplate	(1)
61	10-20-1137	Warning Label	(1)
68	42-55-2743	Contractor Bag	(1)


MILWAUKEE ELECTRIC TOOL CORPORATION

13135 W. LISBON RD., BROOKFIELD, WI 53005

Dwg. 1

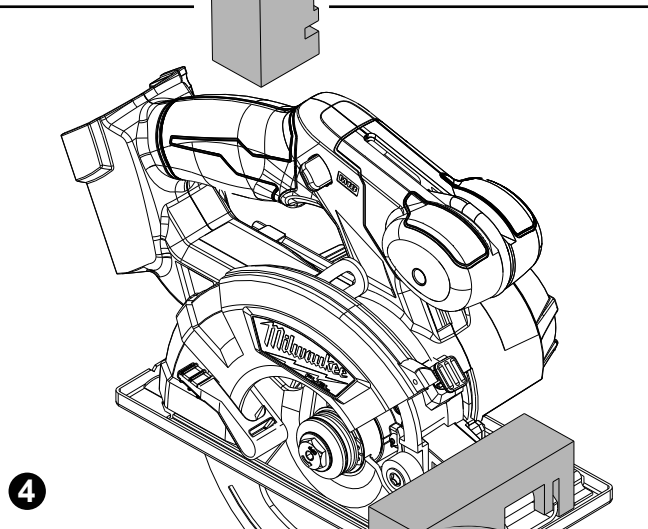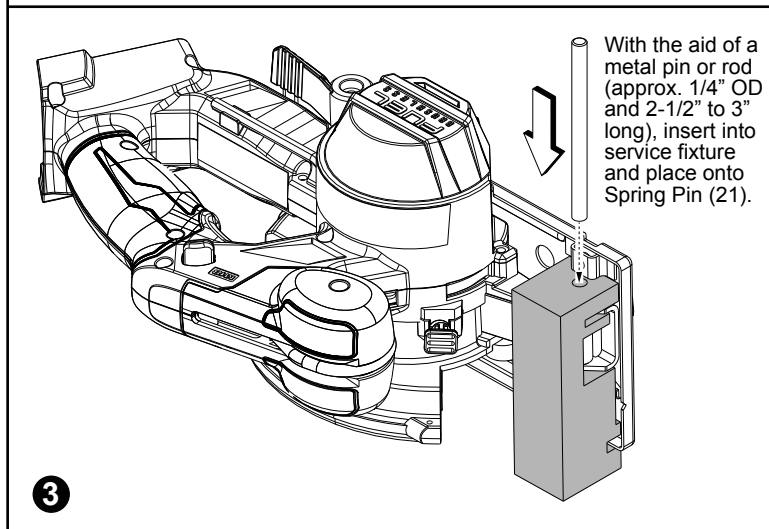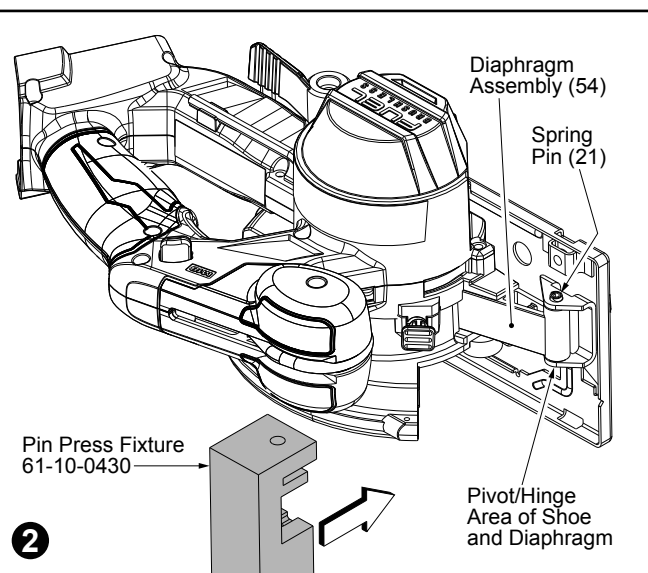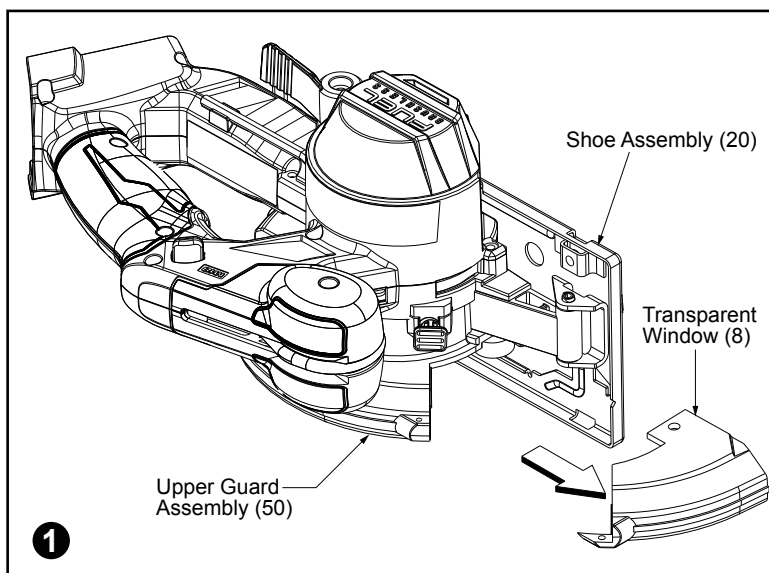

When removing Shoe Assembly (20) and Spring Pin (21) from saw, it is recommended to use Service Fixtures 61-10-0430 and 61-10-0435 in an arbor press. NOTE: Attempting to remove or install the Shoe Assembly without these service fixtures could jeopardize squareness of the cut.

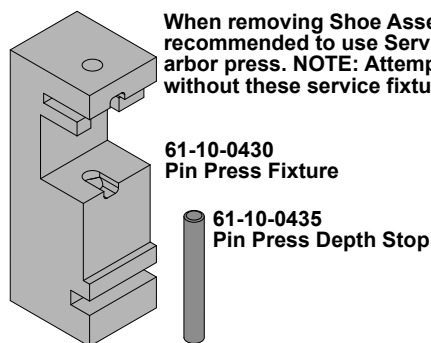



1). Remove Transparent Window (8) from Upper Guard Assembly (50).

2). Install Pin Press Fixture 61-10-0430 onto saw unit as shown, over the pivot area of the Diaphragm Assembly (54), pressing down to snap the fixture detents onto exposed Spring Pin ends (21).

3). Place the tool and fixture onto an arbor press. Insert a pin (approximately 2-1/2" to 3" long with a 1/4" OD) into hole of the fixture as shown. Gently press out the Spring Pin.

4). To reinstall Spring Pin (21), place saw unit onto Shoe Assembly (20) with pivot area of Diaphragm positioned in hinge area of shoe. Place Pin Press Fixture 61-10-0430 onto that pivot/hinge area as shown. Insert Pin Press Depth Stop 61-10-0435 into hole of the other fixture. Turn tool and fixtures on end and position on an arbor press. Press Spring Pin into pivot hole of diaphragm. Use 1/4" OD pin to bottom Spring Pin onto inside fixture.

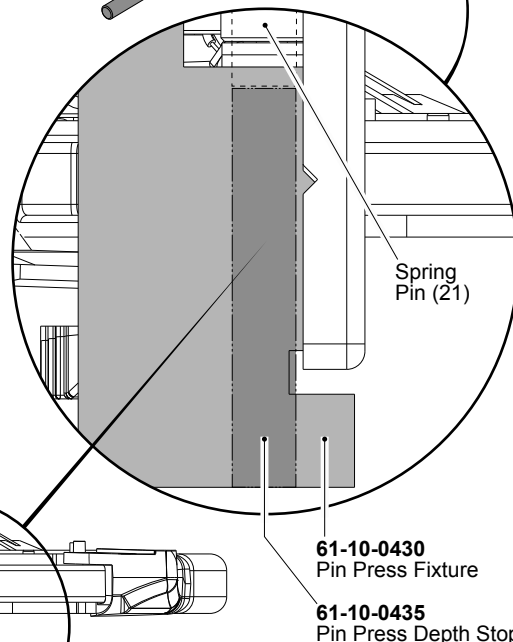

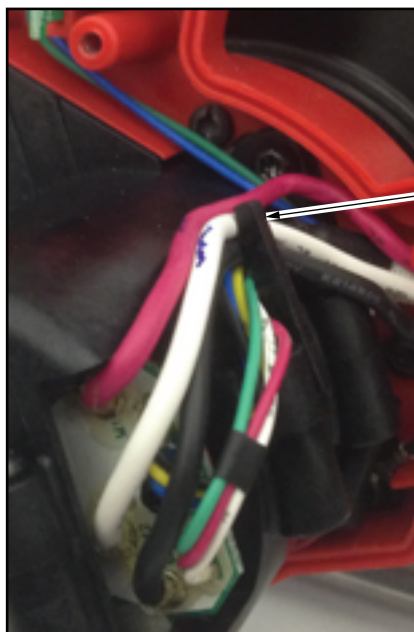

Route wires from stator assembly across the side of motor insulator. Trap all wires behind insulator post as shown.

Insulator post



Switch detail- Route wires to switch as shown with terminal barrels facing upward.



Tuck all switch wires down under the housing tab.

Wire Trap


Housing Post

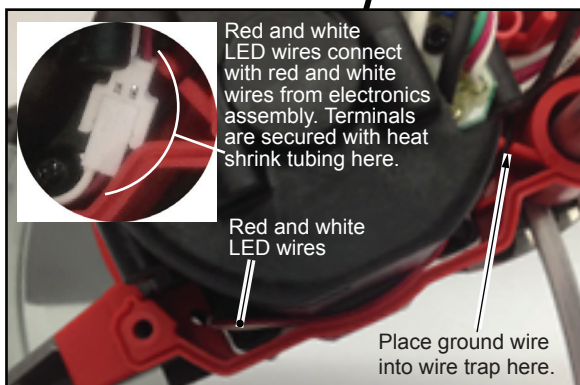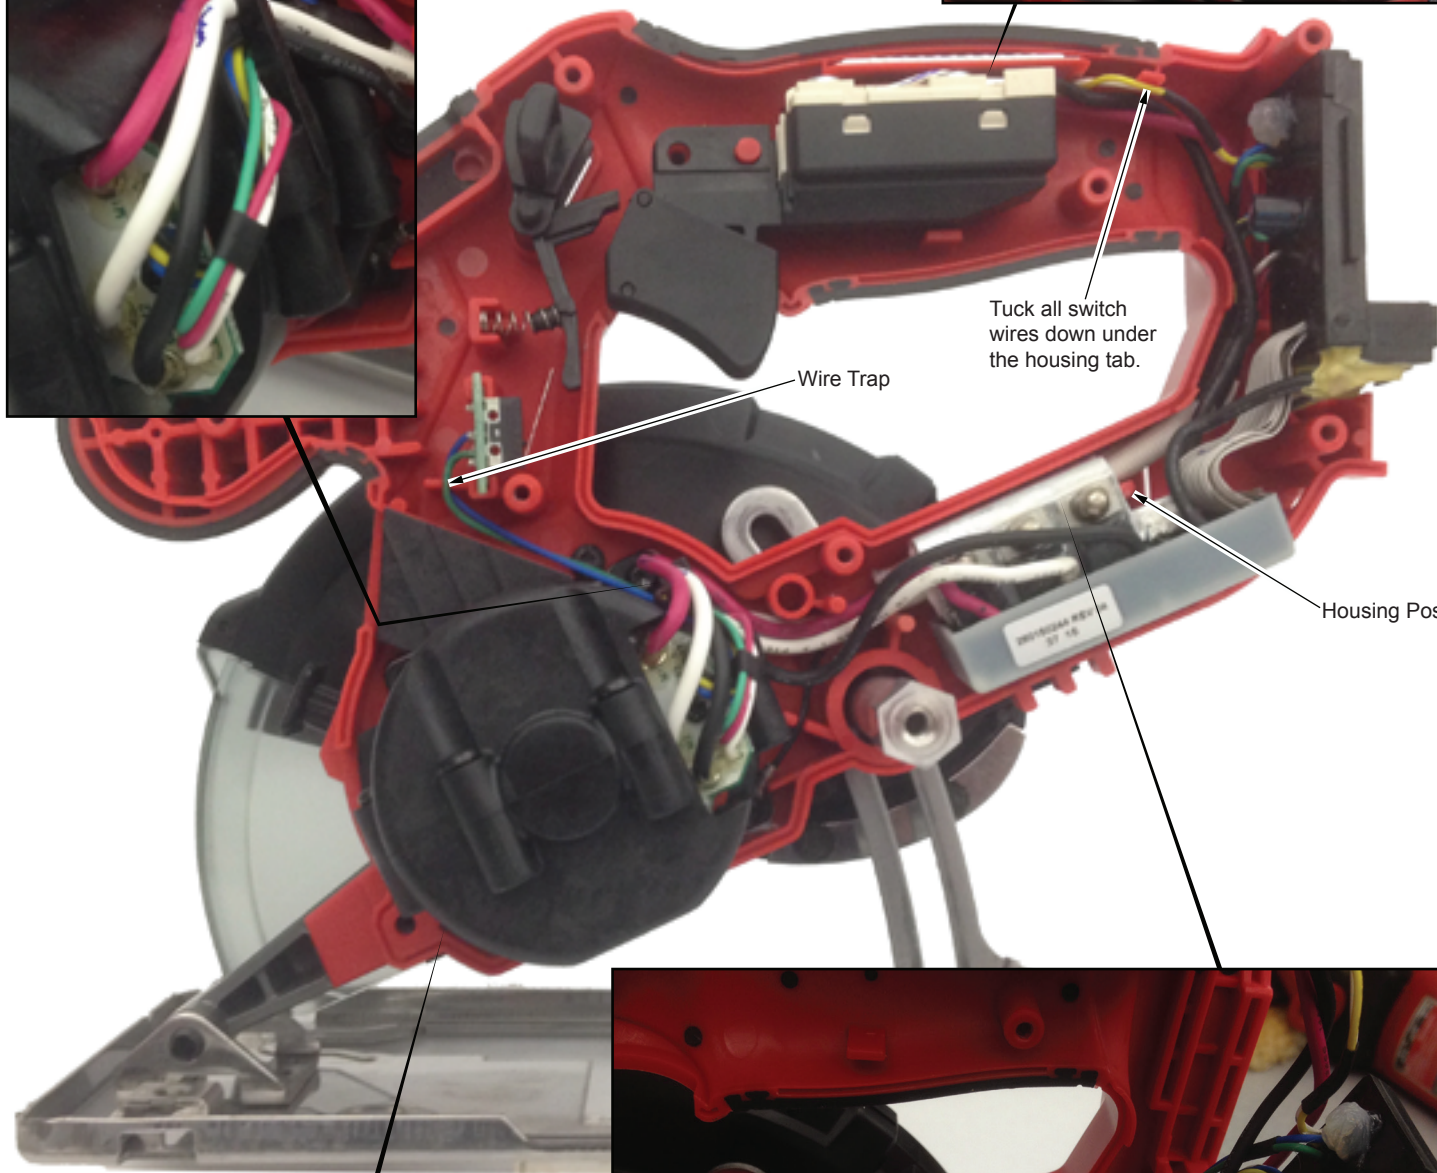

Red and white LED wires connect with red and white wires from electronics assembly. Terminals are secured with heat shrink tubing here.

Red and white LED wires

Place ground wire into wire trap here.

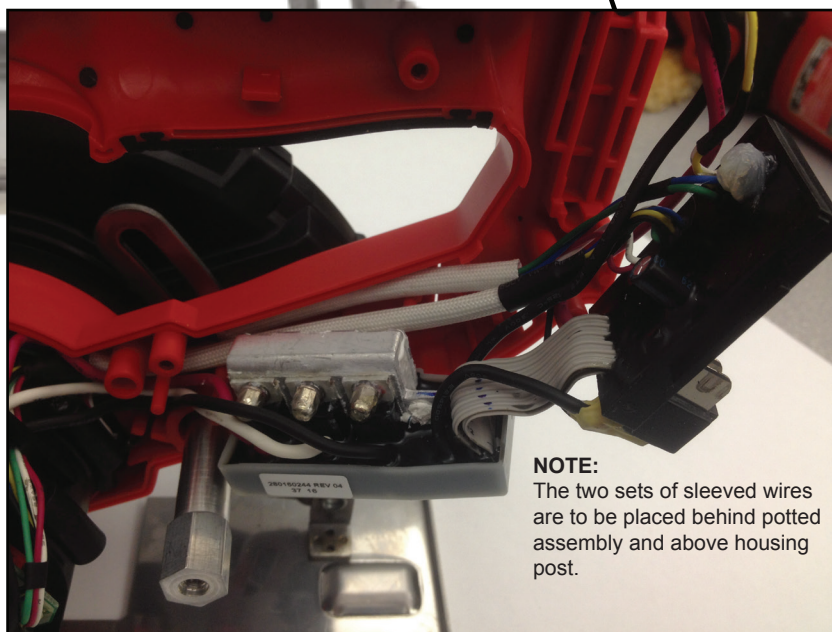

NOTE:
The two sets of sleeved wires are to be placed behind potted assembly and above housing post.

Route LED wires under motor insulator assembly. Be sure wires are tucked away from housing opening.