Air King Ventilation Products®

SPECIFICATIONS

AKZA200

INLINE FAN

HVI® 2100 CERTIFIED

210 CFM @ 0.20" SP.

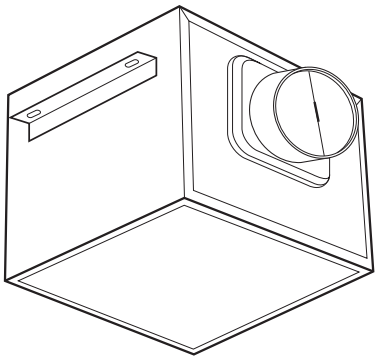

- **Blower Wheel**
  Balanced polymeric dual inlet blower wheel secured in place using a hex nut.

- **Motor**
  Enclosed 4 pole high efficiency, permanently split capacitor motor (PSC); life time lubrication, suitable for continuous operation. Motor bearings - sleeve. Rated 115/120 volts, 60 Hz.

- **Fan Housing**
  23 gauge galvanized steel housing with 1" thermal & acoustical insulation and a removable bottom access panel for servicing. Overall dimensions: 12 11/16"W x 13 1/16"D x 12 9/16"H.

- **Duct Collar**
  6" round, zinc plated metal collar adapter. Gasketed, spring loaded aluminum backdraft damper.

  Model IA613R optional 6" round, zinc plated metal inlet collar adapter available separately.

- **Electrical Connections**
  0.5" electrical knockouts provided. Easy wiring access via either internal or external wiring compartment cover.

- **Single Pack Shipping Info**
  Shipping Weight: 17 lbs.

- **Unit Mounting**
  2 supplied housing mounting angles. The housing mounting angles can be adapted for inline or top discharge mounting (hardware not provided).

- **Mounting Options**

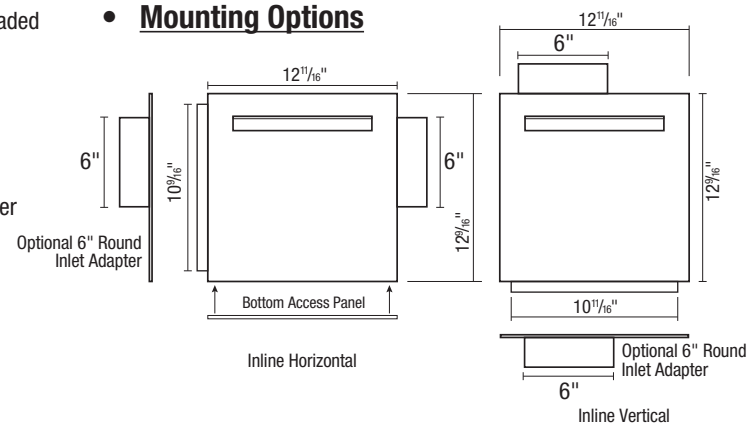

EXPANDED PERFORMANCE

	Static Pressure (inches of w.g.)							*Fan Speed RPM*	*Maximum Fan Watts*	*Amps*
	0	0.1	0.2	0.3	0.4	0.5	0.6			
Air Flow - CFM	225	218	210	198	178	147	86	1169	55.0	0.5

PROJECT		**ARCHITECT**	
LOCATION		**ENGINEER**	
CONTRACTOR		**SUBMITTED BY**	**DATE**

FAN NUMBER	MODEL NUMBER	CFM	IN W.G.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS

ETL LISTED c US Intertek

ENERGY STAR

MEETS MADE IN AMERICA REQUIREMENTS OF ARRA

Air King: 820 Lincoln Avenue
West Chester, Pennsylvania 19380-4466
Tel: (610) 692-7400 • 877-304-3785
Fax: (610) 696-8048

Canada:
Brampton, Ontario
Tel: 905-456-2033
Fax: (905) 456-1015

Specifications subject to change without notice.