

### Specification Submittal Data / Panasonic Ventilation Fan/Light

#### Description

Customizable ceiling mount ventilating fan, low sone and rated for continuous operation. ENERGY STAR® rated and certified by the Home Ventilating Institute (HVI). Evaluated by the Underwriters Laboratories and conforms to both UL and cUL standards.

#### Motor/Blower:

- Enclosed brushless ECM smart motor technology rated for continuous operation
- Adjustable ventilation rates at 50 – 80 – 110 CFM
- Power rating of 120 volts and 60 Hz
- UL and cUL listed for tub/shower enclosure when GFCI protected
- Motor equipped with thermal cutoff fuse
- Removable permanently lubricated plug-in motor

#### Housing:

- Environmentally friendly 26 gauge housing using Zinc-Aluminum-Magnesium (ZAM) coating
- Integrated dual 4" or 6" diameter duct adapter
- Built-in damper reduces back draft and helps with blower door testing
- Built-in metal flange provides blocking for penetrations through drywall as an Air Barrier, and assists with the decrease in leakage in the Building Envelope during blower door testing
- Suitable for installation in ceilings insulated up to R60
- Articulating and expandable installation bracket up to 24"

#### Grille:

- Attractive design using Poly Pro material
- Attaches directly to housing with torsion springs
- Includes a motion sensor cap for use as a cover when the motion sensor Plug 'n Play™ module has not been selected

#### Warranty:

- ECM Motor: 6 Years from original purchase date
- LED Panel: 5 Years from original purchase date
- ALL Parts: 3 Years from original purchase date



Includes 10 Watt Dimmable LED chip panel/3000 Kelvin Warm White/90CRI/700 lumens/70 LPW/ENERGY STAR 2.0 certified/JA-8 compliant for CA Title 24/50,000 hours rated average life /<1W one LED night light included.


#### Architectural Specifications:

Customizable ceiling mount ventilation fan, ENERGY STAR® rated with multi-speed control (0, 30-100 CFM, in 10 CFM increments) and a built-in high/low adjustable time delay activated by a wall switch, SmartAction Motion Sensor Plug 'N Play™ module or Condensation Sensor Plug 'N Play™ module. Features a built-in speed selector. Select from 50/80/110 CFM with no more than <0.3/<0.3/0.4 sone as certified by the Home Ventilating Institute (HVI) at 0.1 w.g. with 50/80/110 CFM and no more than 0.4/0.5/0.8 sones at 0.25 w.g. and 50/78/103 CFM at 0.375 w.g. Power Consumption shall be no greater than 3.2/5.3/10.5 watts at 0.1 w.g. and 6.2/9.9/15.8 watts at 0.25 w.g. and 9.9/13.8/19.4 watts at 0.375 w.g. ENERGY STAR® rated with efficiency of no less than 15.7/15.3/10.5 CFM/watt at 0.1 w.g. and 8.1/8.2/6.9 CFM/watt at 0.25 w.g. and 5.1/5.6/5.2 CFM/watt at 0.375 w.g. The motor shall be enclosed with brushless ECM motor engineered to run continuously. ECM motor speed shall automatically increase when the fan senses static pressure to maintain selected CFM. Power rating shall be 120v/60Hz. Duct diameter shall be no less than 4", inclusive of an integrated dual 4" or 6" duct adapter. **Plug 'N Play™ modules** provide up to two additional features. Select from Condensation Sensor, and SmartAction Motion Sensor. LED dimmable type lamp with (1) 10W ENERGY STAR® 2.0 certified, JA-8 compliant for CA Title 24, LED chip panel that maintains 50,000 hours rated average life and incorporates a <1W LED night light. Fan shall be RoHS Compliant and UL and cUL listed for tub/shower enclosure when GFCI protected. Also suitable for installation in ceilings insulated up to R60. Fan can be used to comply with ASHRAE 62.2, LEED, ENERGY STAR®, IAP, EarthCraft, California Title-24 and WA Ventilation Code.




#### ECM Motor Technology:

When fan senses static pressure, its speed is automatically increased to ensure that the desired CFM is not compromised, which allows the fan to perform as rated.

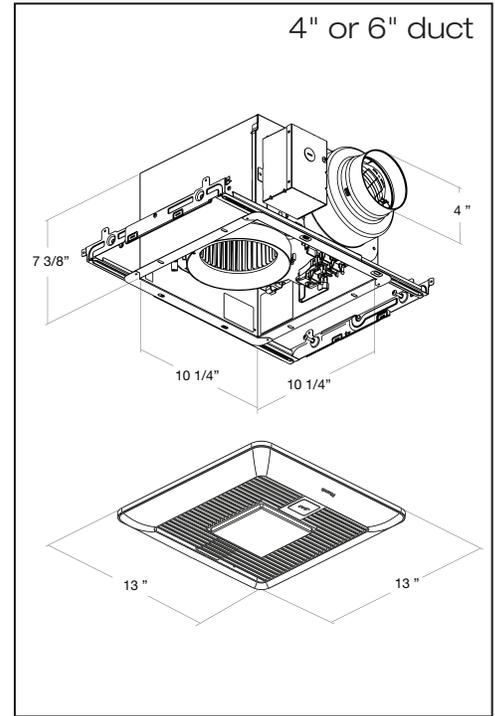

FV-0511VKSL2

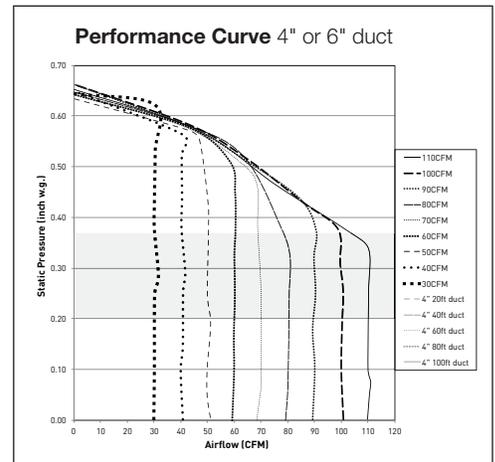

\*Industry research indicates static pressure in typical installations ranges from 0.20" to 0.375"

Model	Quantity	Comments	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

For complete Installation Instructions visit [us.panasonic.com/ventfans](http://us.panasonic.com/ventfans)

## Plug 'N Play™ Modules

Plug 'N Play™ modules provide up to **two** features (multi-speed is already built-in to FV-0511VKSL2). Select from Motion Sensor and Condensation Sensor.



### FV-VS15VK1: Multi-Speed with Time Delay - N/A for this Fan, already built-in.

Allows you to select the proper CFM settings to satisfy ASHRAE 62.2 continuous ventilation requirements. The fan runs continuously at a pre-set lower level (0, 30-100 CFM, in 10 CFM increments), then elevates to a maximum level of operation (50-80-110 CFM) when the wall switch is turned on, or when the motion sensor or Condensation Sensor module is activated. A High/Low delay timer returns the fan to the pre-set CFM level after a period of time set by the user.



### FV-MSVK1: Motion Sensor

Automatically activates when someone enters the room. Once the settings have been applied, the fan becomes truly automatic. This module also activates a 20 minute delay off timer for the fan.



### FV-CSVK1: Condensation Sensor

Helps control bathroom condensation to prevent mold and mildew. Sensor technology detects relative humidity and temperature to anticipate dew point, automatically turning the fan on to control humidity. Built-in Relative Humidity (RH) sensitivity adjustment enables fine tuning for moist conditions and for satisfying CalGreen requirements. When the condensation sensor is used in conjunction with multi-speed functionality, the fan will kick up to high speed when the condensation sensor detects moisture in the room. This module also activates a 20 minute delay off timer for the fan.

Fan Specifications	WhisperGreen Select™: FV-0511VKSL2																										
Static Pressure in inches w.g.	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375	0.1	0.25	0.375
Air Volume (CFM)	110	110	103	100	101	99	90	90	90	80	80	78	70	70	69	60	60	60	50	50	50	40	41	40	30	30	30
Noise (sones)	0.4	0.8	-	<0.3	0.8	-	<0.3	0.6	-	<0.3	0.5	-	<0.3	0.5	-	<0.3	0.4	-	<0.3	0.4	-	<0.3	0.4	-	<0.3	0.4	-
Power Consumption (watts)	10.5	15.8	19.4	8.2	13.6	18.0	6.7	11.6	15.9	5.3	9.9	13.8	4.6	8.7	12.3	3.7	7.2	10.4	3.2	6.2	9.9	2.7	5.5	8.1	2.5	4.8	7.0
Energy Efficiency (CFM/Watt)	10.5	6.9	5.2	12.2	7.4	5.5	13.5	7.8	5.7	15.3	8.2	5.6	15.8	8.4	5.8	16.2	8.4	5.8	15.7	8.1	5.1	14.8	7.4	4.9	12.0	6.3	4.3
Speed (RPM)	958	1203	1375	908	1194	1372	868	1160	1357	811	1127	1341	785	1118	1321	750	1082	1282	730	1066	1281	710	1062	1275	720	1067	1272
Current (amps)	0.11	0.16	0.19	0.09	0.14	0.18	0.08	0.12	0.16	0.06	0.10	0.14	0.06	0.10	0.13	0.05	0.08	0.11	0.04	0.07	0.10	0.04	0.07	0.09	0.04	0.06	0.08
MAX. Current (amps)	0.19																										
Power Rating (V/Hz)	120/60																										
ENERGY STAR rated	Yes																										

\*Industry research indicates static pressure in typical installations ranges from 0.20" to 0.375"