



**4" Duct (Standard):**

80 CFM/1.3 Sones @ 0.1" SP, 10 Watts  
60 CFM/1.4 Sones @ 0.25" SP, 12 Watts



**Description**

Low noise ceiling/wall mount ventilating fan for continuous running. Fan has been awarded ENERGY STAR®. It is HVI, UL, and cUL certified, and can be used to comply with ASHRAE 62.2 (local and whole building continuous and intermittent operation).

**DC Motor/Blower**

- Power rating of 120 volts/60Hz
- DC brushless motor engineered to run continuously
- Motor equipped with thermal cutoff fuse
- Removable with permanently lubricated plug-in motor
- Built-in soft start function to increase bearings' life
- Automatically powers off when impeller is locked abnormally

**Housing**

- Galvanized steel body
- Detachable 4" diameter plastic duct adapter
- Built-in backdraft damper
- Easy installation

**Grille**


- Attractive design using ABS material
- Attaches directly to housing with torsion springs

**Warranty**


- 3-year limited warranty

**TYPICAL SPECIFICATION**

Ventilation fan shall be Delta Breez model ITG80; ENERGY STAR qualified with DC brushless motor engineered to run continuously for a minimum 70,000 hours; airflow rating of 80 CFM and loudness rating of 1.3 Sones at 0.1 static pressure as certified by the Home Ventilating Institute (HVI); power consumption of 10 Watts with efficiency rating of 8.4 CFM/Watt. UL and cUL listed for tub/shower enclosure when used with GFCI-protected branch circuit wiring.

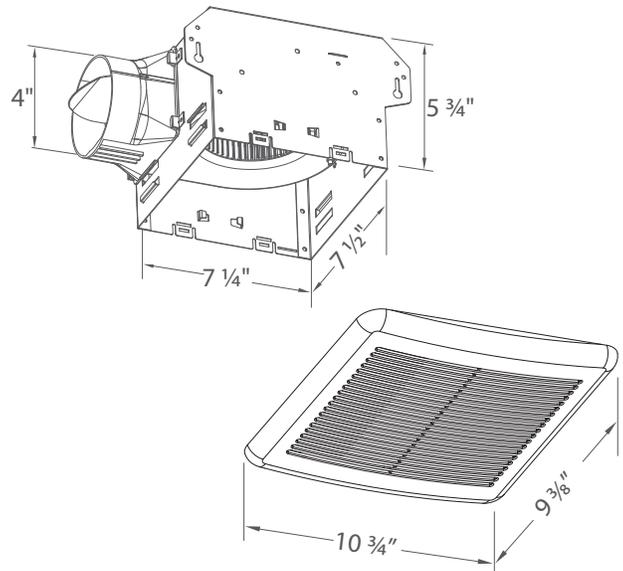

<b>BreezIntegrity ITG80</b>	<b>4" Duct (Standard)</b>	
Static Pressure (inches w.g.)	0.1	0.25
Air Flow (CFM)	80	60
Sones	1.3	1.4
Power Consumption (Watts)	10	12
Energy Efficiency (CFM/Watt)	8.4	6.6
Current (Amps)	0.20 Max	
Power Rating (V/Hz)	120 / 60	

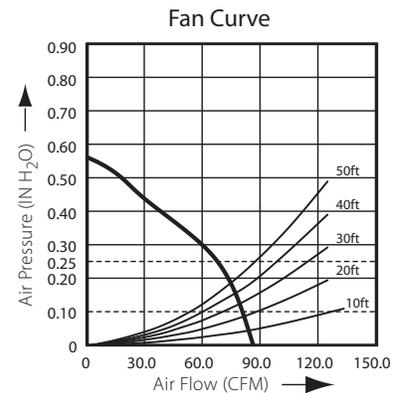

Model	Quantity	Comments	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date: