
SHOEMAKER MANUFACTURING 1.866.940.0696 sm@shoemakermfg.com

Damper Louver Submittal

Drywall Access Door

MODEL: 6700 Series

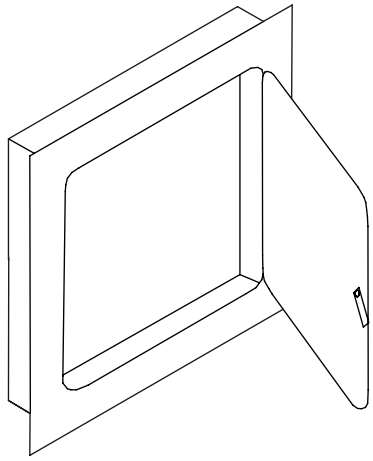


6700


Standard Features:

- 16 gauge galvanized steel construction
- One piece constructed 1” wide flange frame for concealment of rough wall opening
- 1/4” mounting holes for fastening within furred spaces allows faster installation and maximum clearance
- Concealed pivoting rod hinge. Doors 24” and larger are constructed with a continuous piano hinge
- Screwdriver operated latch
- Minimum wall opening must be nominal + 1/2”
- White Prime Coat Finish

Options:

- ☐ Type 304 stainless steel construction - minimum wall opening for the 6700-SS must be nominal + 3/4” (6700-SS)
- ☐ Cylinder lock (one per door)

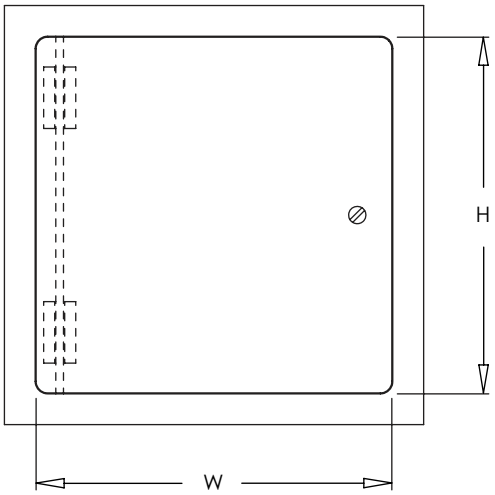

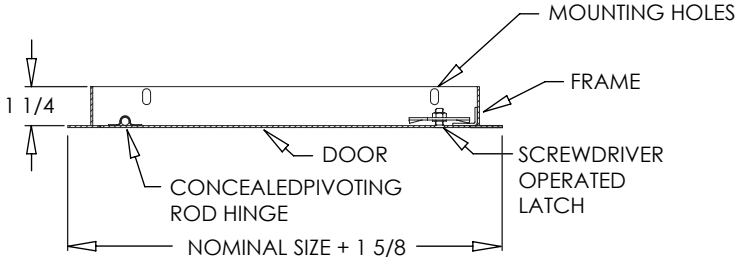

Additional Information:

Project / Location:	Submittal Notes
Engineer:	
Architect:	
Contractor:	