Sealed Unit Parts Co., Inc.
PO Box 21, 2230 Landmark Place
Allenwood, NJ 08720
www.supco.com

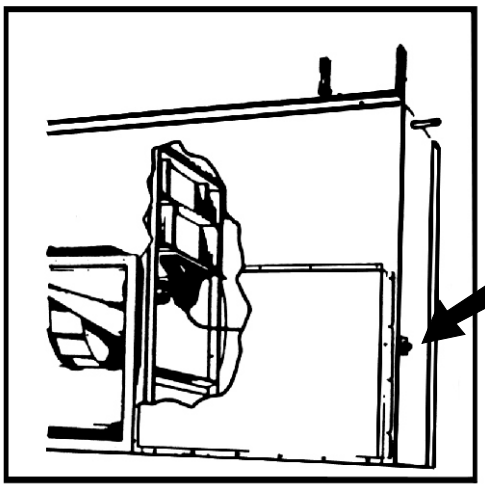

◀EASY TO INSTALL
◀SAVES TIME!

NEW GREASE FITTING
LOCATION ALLOWS
FOR EASY SERVICE!

GFK-1

Grease Fitting Kit
for Hard To Reach Places

KIT CONTENTS
10' HIGH OF HIGH PRESSURE TUBING AND ALL THE NECESSARY FITTINGS.

FITTINGS

2 - 1/8 MPT x 1/4 Compression Connectors

2 - 1/4 Compression Nuts

2 - Compression Sleeves



1 - 1/4 x 1/8 Reducing Bushing
1 - 3/8 x 1/8 Reducing Bushing



1 - Mounting Plate

1 - Jam Nut

1 - Threaded Adapter

1 - Grease Fitting

2 - Screws

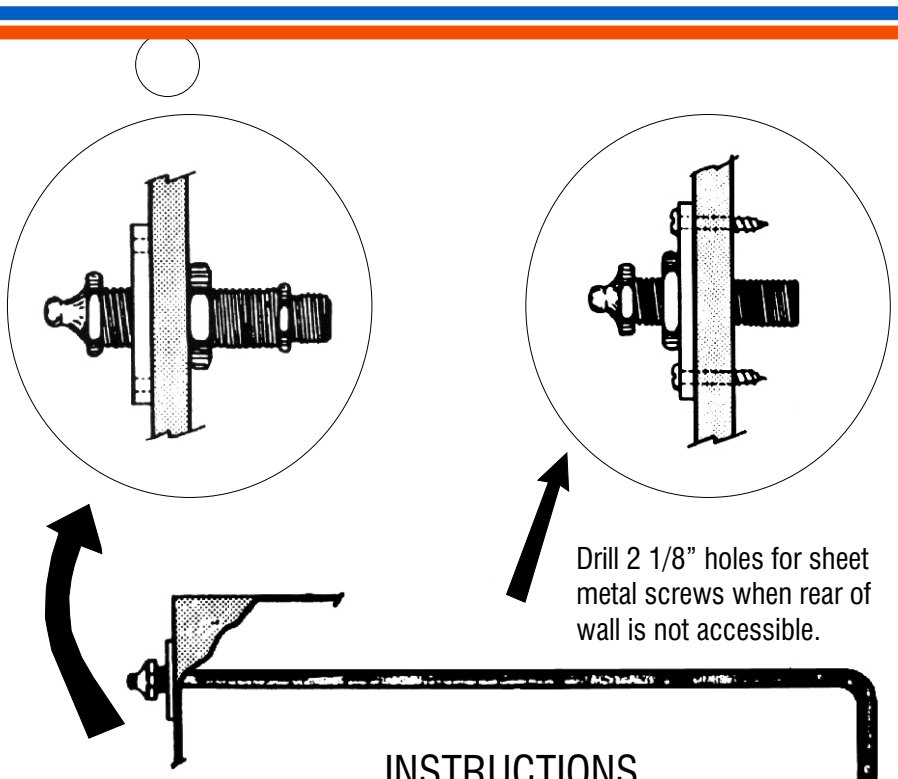

Drill 2 1/8" holes for sheet metal screws when rear of wall is not accessible.

INSTRUCTIONS

1. Remove old grease fitting.
2. Install 1/8 MPT x 1/4 Compression Connector. (Use Reducing Bushing if required)
3. Attach tube using a Compression Nut and Sleeve.
4. Drill a ½" hole in the selected location where you desire to install this "EASY ACCESS" Grease Fitting.
5. Assemble the mounting plate and Jam nut for installation shown above...either Figure "A" or Figure "B".
6. Install 2nd 1/8 MPT x 1/4 Compression Connector to Threaded Adapter.
7. Attach tube using 2nd 1/4 Compression Nut and Sleeve.
8. Install new Grease Fitting...Lubricate.



Saves Time!

Easy To Use!

- A 1/4 Compression Nut
- B Compression Sleeve
- C 1/8 MPT x 1/4 Compression Connector
- D Reducing Bushing When Required

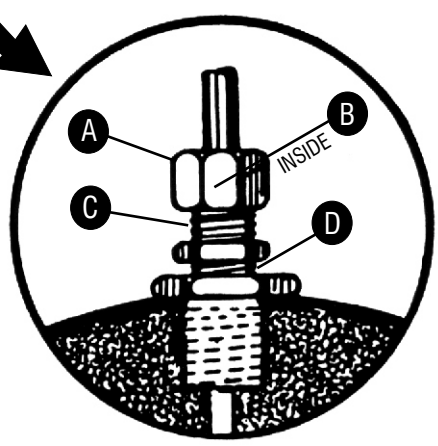

Sealed Unit Parts Co., Inc.
PO Box 21, 2230 Landmark Place
Allenwood, NJ 08720 USA
www.supco.com

Made by SUPCO®
Ningbo, China
P/N 10167 Rev. 06222016