


**RDFQL
PREMIUM
RADIATION DAMPER
FOR VENTILATION FANS**



Premium radiation damper for use with Broan and NuTone ventilation fans (sold separately).

FEATURES

- For use in 1, 2 and 3 hour rated floor-ceiling and roof-ceiling constructions
- Galvanized steel frame
- High temperature, non-asbestos, reinforced fiber thermal fabric
- Stainless steel closure springs
- 165°F fusible link
- Separate outer frame allows complete fan and damper serviceability without disturbing the surrounding ceiling material
- Meets or exceeds NFPA-90A
- Includes light jumper cable
- UL Classified (UL-555C)

RDFQL for use with the following ventilation fan models:

Broan QTRE080FLT, QTRE110FLT, QTRE080FLFT, QTRE110FLFT, QTXE080FLT, QTXE110FLT, QTXE150FLT, QTXE110SFLT*, QTXE110S*

NuTone QTREN080FLT, QTREN110FLT, QTREN080FLFT, QTREN110FLFT, QTXEN080FLT, QTXEN110FLT, QTXEN150FLT, QTXEN110SFLT*, QTXEN110S*

* Sensor cable extension required on these models. (Purchase Model RDJUMPQ separately.)

TYPICAL SPECIFICATION

Radiation damper shall be Broan/NuTone RDFQL suitable for use with the following ventilation fan models:


Broan QTRE080FLT, QTRE110FLT, QTRE080FLFT, QTRE110FLFT, QTXE080FLT, QTXE110FLT, QTXE110SFLT, QTXE110S

NuTone QTREN080FLT, QTREN110FLT, QTREN080FLFT, QTREN110FLFT, QTXEN080FLT, QTXEN110FLT, QTXEN110SFLT, QTXEN110S

Radiation damper shall be rated for use in up to three hour ceiling constructions. It shall be UL Classified (UL-555C) and meets or exceeds NFPA-90A.



SEE DETAILS ON UL
CLASSIFICATION
MARKING ON
PRODUCT

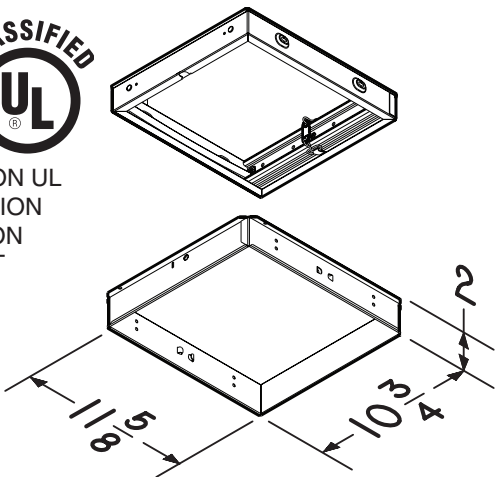

Broan-NuTone LLC Hartford, Wisconsin www.broan.com www.nutone.com 800-558-1711
Broan-NuTone Canada Mississauga, Ontario www.broan.ca www.nutone.ca 877-896-1119

REFERENCE	QTY.	REMARKS	Project	
			Location	
			Architect	
			Engineer	
			Contractor	
			Submitted by	Date