



i-Vu® Building Automation System

IPS1-05-U

Unmanaged IP Ethernet Switch





The IPS1-05-U is ideal for connecting Carrier's TruVu™ dual IP controllers to an Ethernet network (Home run and Daisy chain topologies supported). The IPS1-05-U features five gigabit Ethernet ports that support 10/100 Mbps auto negotiation. Rugged construction and din rail mounting make it well suited for panel installation in many HVAC applications.



Features

- Provides 5 fast Ethernet ports with Auto MDI/MDI-X
- Supports 10/100 Mbps Auto-Negotiation
- Provides broadcast storm protection
- Provides compact size with DIN-rail/Wall mount, and IP30 metal mechanism
- Supports redundant 12 ~ 48 VDC power input and P-Fail relay
- Provides a relay output for an event alarm
- Built-in LEDs to indicate hardware status, which makes troubleshooting quick and easy
- -10 ~ 60 °C (14 ~ 140 °F) operating temperature

Suggested Network Topologies

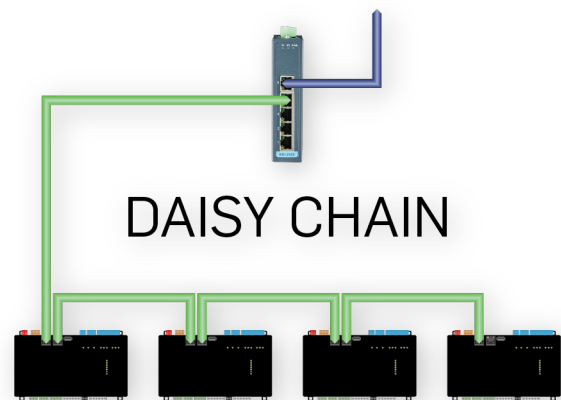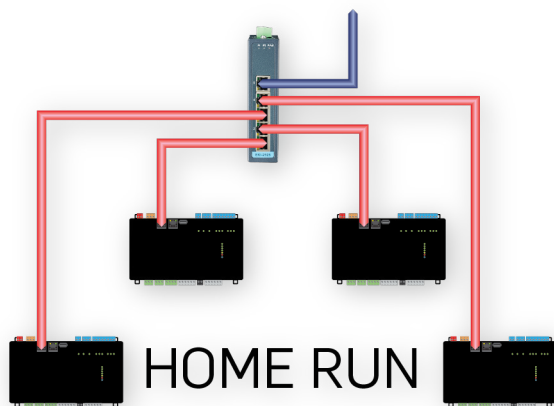

i-Vu Building Automation System

IPS1-05-U

Unmanaged IP Ethernet Switch



Specifications

Interface

Connectors: 8 x RJ45 (EKI-2528) or 5 x RJ45 (EKI-2525)
6-pin removable screw terminal (power & relay)

System LED: PWR1, PWR2, P-Fail

Port LED: 10/100T (X): Link/Activity, Duplex/Collision

Physical

Enclosure: Metal shell with solid mounting kits

Protection Class: IP 30

Installation: DIN-Rail

Dimensions (W x H x D): 30 x 120 x 95 mm (1.18" x 4.72" x 3.74")

Certification

EMI: CE, FCC Class A

Safety: UL 62368

EMS: EN 61000-4-2

EN 61000-4-3

EN 61000-4-4

EN 61000-4-5

EN 61000-4-6

EN 61000-4-8

Shock: IEC 60068-2-27

Freefall: IEC 60068-2-32

Vibration: IEC 60068-2-6

Environment

Operating Temperature: -10 ~ 60 °C (14 ~ 140 °F)

Storage Temperature: -40 ~ 85 °C (-40 ~ 185 °F)

Ambient Relative Humidity: 10 ~ 95% (non-condensing)

Humidity: 10 ~ 95% (non-condensing)

Power


Power Consumption: 5.28W @ 48VDC (System)

Power Input: 12~48 VDC, redundant dual power input

Fault Output: 1 Relay Output 1A @ 24VDC Max

Reverse polarity protection: Supported

Overload current protection: Supported

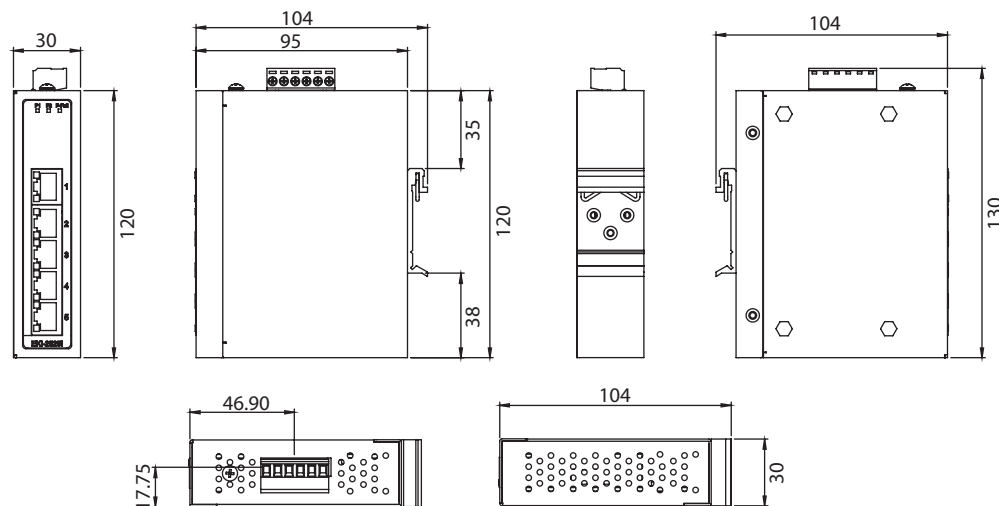

Panel Cut-out Dimensions: 30 x 120 x 95 mm (1.18" x 4.72" x 3.74")

