SPECIFICATIONS

F130D

FRESH AIR SUPPLY FAN

HVI CERTIFIED 2100

130 CFM @ 0.20" SP.
80 CFM @ 0.20" SP.
30 CFM @ 0.20" SP.

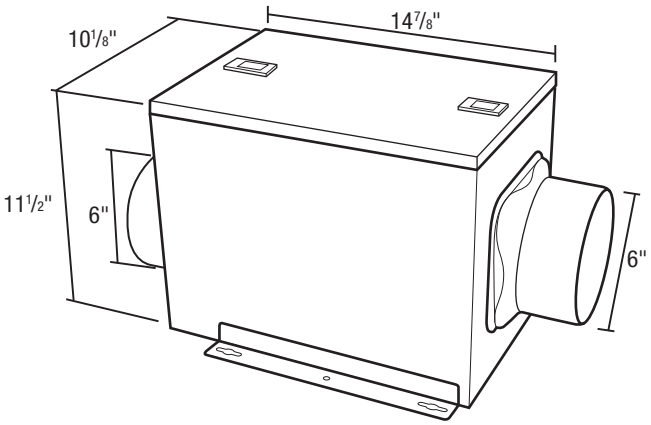



- **Blower Wheel**
  Balanced polymeric dual inlet blower wheel secured in place using a hex nut.
- **Adjustable Capacity Motor**
  Variable capacity settings allow the fan to be set from 30 to 130 CFM
  4 pole ECM motor, permanently lubricated, thermally protected 115/120V 60 Hz., 0.50 amps.
  Fan Efficacy: 5 CFM/Watt at 130 CFM, 0.2" SP.
  Static Pressure Range: Up to 0.4" SP.
- **Fan Housing**
  Insulated 26 gauge baked epoxy housing. Overall dimensions: 14 7/8"H x 11 1/2"D x 10 1/8"W.
- **Duct Collars**
  6" round, zinc plated metal collar adapters.
- **Electrical Connections**
  0.5" electrical access. Easy wiring access via external wiring compartment cover or internal access plate.
- **Unit Mounting**
  Designed to surface mount to a wall or ceiling with the included mounting brackets. Can be mounted onto joists, studs or the housing mounting brackets can be adapted for overhead mounting (hardware not provided).
- **Optional Air Filter**
  An optional 10" x 10" x 2" air filter can be added to the unit (not included).
- **Test Port**
  Allows easy air flow measurement with Pitot tube or similar device.
- **Single Pack Shipping Info**
  Box Dim: 23" x 15 7/8" x 12 3/4"
  Shipping Weight: 17.7 lbs.

PROJECT							**ARCHITECT**		
LOCATION							**ENGINEER**		
CONTRACTOR							**SUBMITTED BY**		**DATE**
FAN NUMBER	**MODEL NUMBER**	**CFM**	**IN W.G.**	**RPM**	**WATTS**	**AMPS**	**SONES**	**QTY**	**OPTIONAL EQUIPMENT & REMARKS**

U.S.: 820 Lincoln Avenue
West Chester, Pennsylvania 19380-4466
Tel: (610) 692-7400 • 877-304-3785
Fax: (610) 696-8048

Canada:
Brampton, Ontario
Tel: 905-456-2033
Fax: (905) 456-1015

Specifications subject to change without notice.

Updated 5-22

SPECIFICATIONS

F130D

FRESH AIR SUPPLY FAN

Model F130D Fan Curve

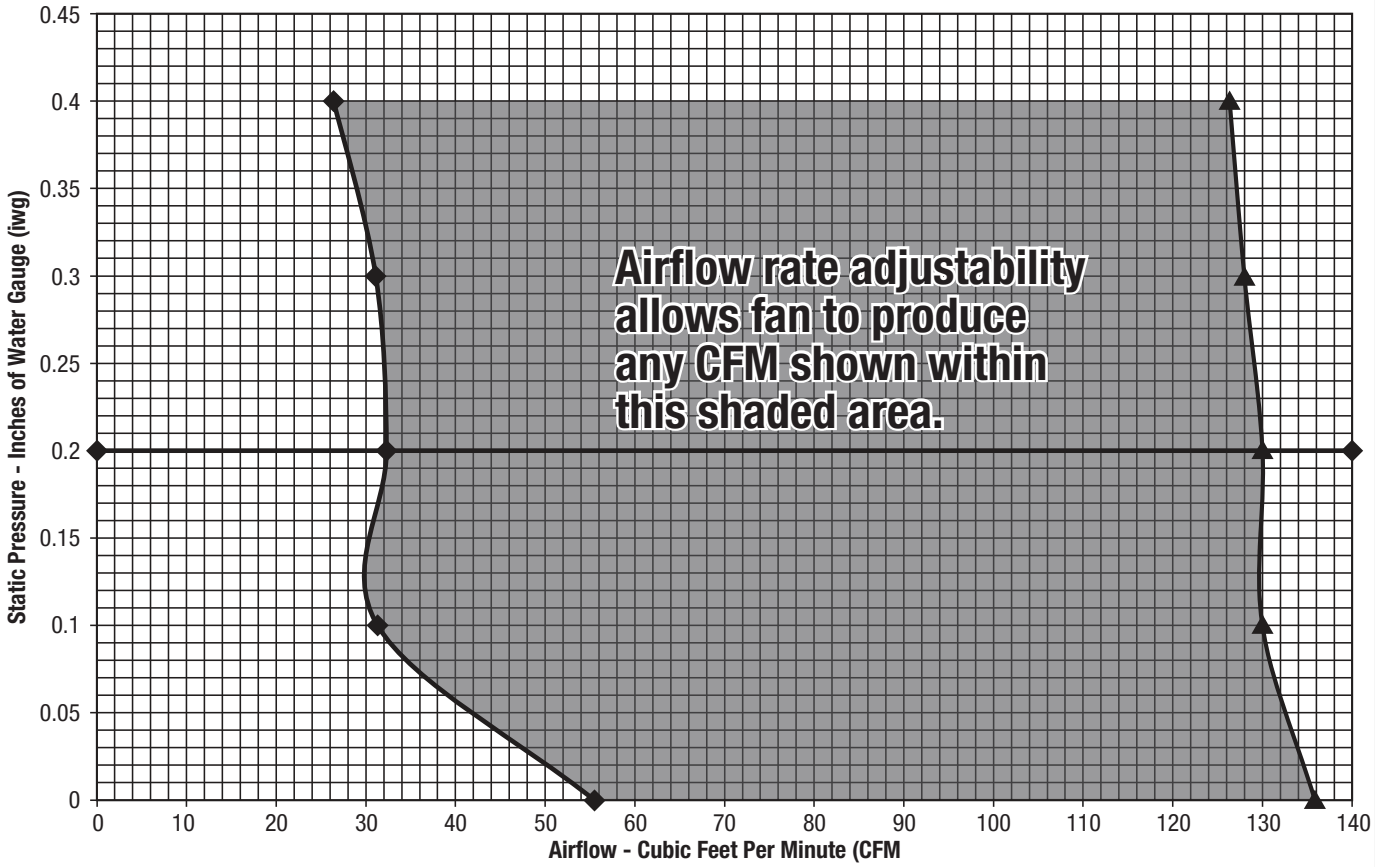

U.S.: 820 Lincoln Avenue
West Chester, Pennsylvania 19380-4466
Tel: (610) 692-7400 • 877-304-3785
Fax: (610) 696-8048

Canada:
Brampton, Ontario
Tel: 905-456-2033
Fax: (905) 456-1015

Specifications subject to change without notice.

Updated 5-22