




M2 STANDARD

2-VALVE CLASSIC BRASS MANIFOLD

FEATURES


- Full flow free floating dual o-ring sealing system design for faster evacuation and charging
- Angled bar for increased knuckle clearance to rotate handwheels
- Heavy-duty, all metal gauge cases for added durability
- Surge dampened gauges for reduced needle movement
- Available in 2-1/2" and 3-1/8" gauges
- Easy-to-read, color coded refrigerant dials
- Replaceable, durable hanging hook and intake/hose holder fittings
- Easy-to-turn plastic handwheels; metal available on select models
- 1 year warranty; lifetime on bar

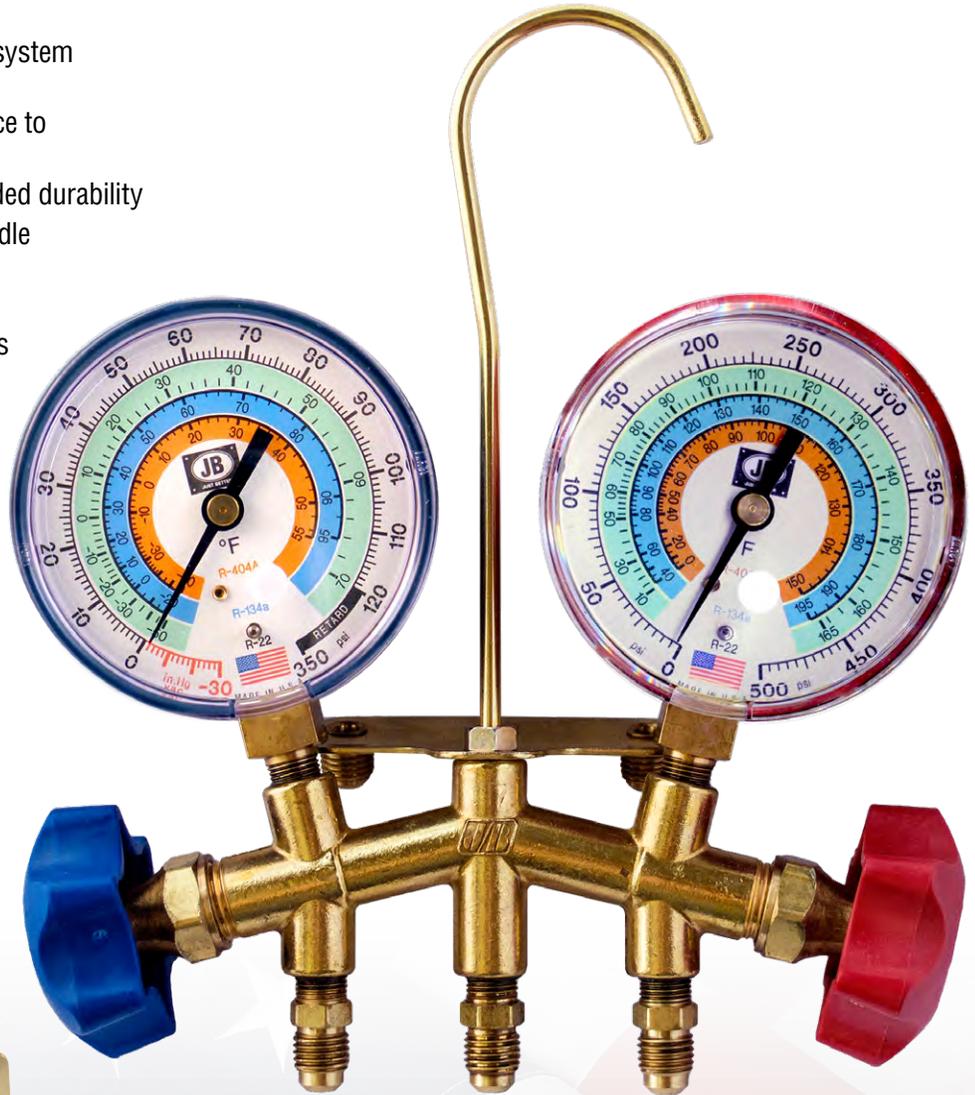

ORIGINAL FREE FLOATING DUAL O-RING SEALING SYSTEM

Stem seats retract completely for full flow path

Double o-ring

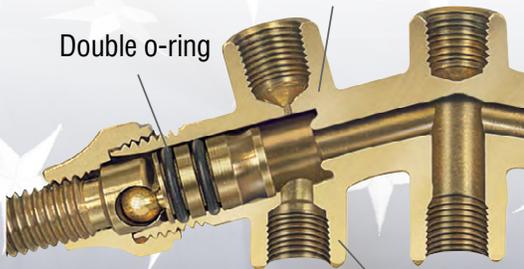

Zero leakage high pressure raised seat for positive seating

M2-23125



JB INDUSTRIES
800.323.0811 JBIND.COM SALES@JBIND.COM