




200

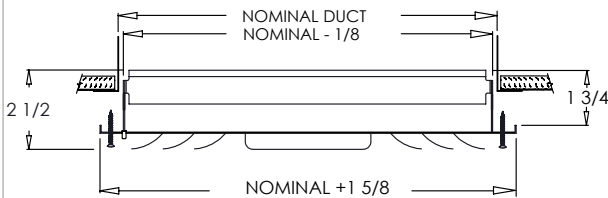

200

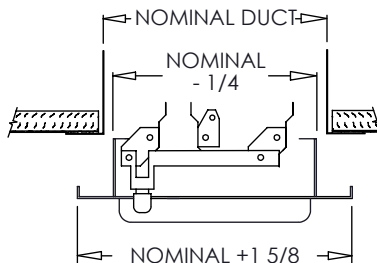

200-O

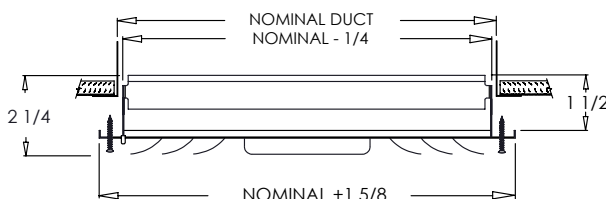

200-O

Standard Features:

- Stamped curved blades provide uniform air distribution across ceiling or walls
- Three air patterns available
- Lever operated multi-shutter damper
- All component parts, rivets, linkage, and handle enclosed in valve to assure trouble-free operation
- Countersunk mounting holes with color matching Phillips Posidriv screws
- Rust resistant pre-coat with durable powder finish
- Soft White

Options:

- ☐ Lever operated Opposed Blade Damper (200-0)
- ☐ Tool operated Opposed Blade Damper (TO-200-0)
- ☐ 2" ADC compliant round collar with bead for ease of installation (available in square sizes only) (200-NLC)
- ☐ T-20 Tamper Proof Screws

Air Patterns:

- ☐ 201H
- ☐ 203
- ☐ 204

Finishes:


STANDARD COLORS

- ☐ Soft White
- ☐ Driftwood Tan

DESIGNER COLORS


- ☐ Black
- ☐ Bronze
- ☐ Storm Gray
- ☐ Cement Gray

- ☐ Aluminum Paint
- ☐ Coffee Tan
- ☐ Warm White
- ☐ Glossy White

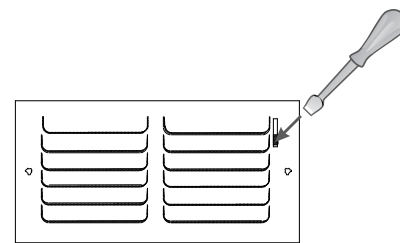


TO-200-O


Air Patterns:



201 H



203



204

Additional Information:

Submittal Notes

Project / Location:

Engineer:

Architect:

Contractor: