


Standard Features:

- Adjustable aluminum curved blades
- Nylon bushings on adjustable blades prevent metal on metal rattle
- Extruded aluminum surface mount frame with signature line marks
- Designed for four-way air deflection
- Fractional and exact sizes available
- Countersunk mounting holes with color matching Philips Posidriv screws
- Rust resistant pre-coat with durable powder finish
- Soft White

Options:

- Recessed screwdriver operated Opposed Blade Damper (CB40-0)
- 2" ADC compliant round collar with bead for ease of installation – available in square sizes only
- Concealed Mount (CM)
- MRI Compatible
- T-20 Tamper Proof Screws

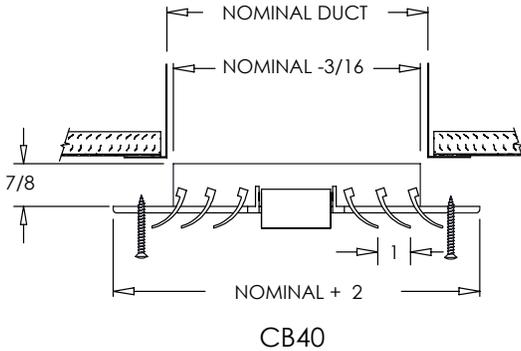

Air Patterns:

- CB-40A
- CB-40B
- CB-40C

Finishes:


STANDARD COLORS

- Soft White
- Driftwood Tan
- Mill Finish


DESIGNER COLORS

- Black
- Bronze
- Storm Gray
- Cement Gray


- Aluminum Paint
- Coffee Tan
- Warm White
- Glossy White

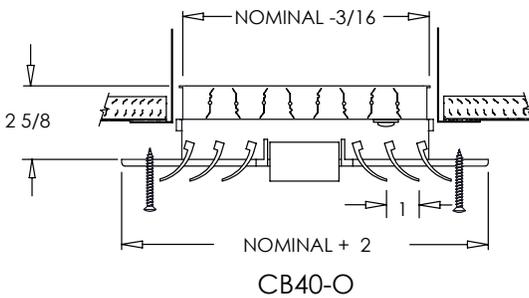

CB40 Square Air Patterns:



CB40 Rectangle Air Patterns:

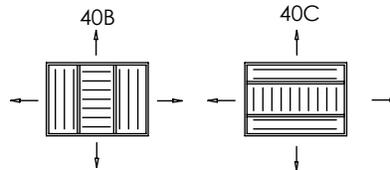

Additional Information:

Submittal Notes

Project / Location:	
Engineer:	
Architect:	
Contractor:	