


Submitted to:	Approved by:	Notes:
---------------	--------------	--------

Knockdown Structurally Calculated Curb - 14 Inches Tall Non Insulated Full Perimeter Knockdown Structurally Calculated Curb, California State Standard, High Seismic Criteria, Includes Hold-Down Brackets. "Structurally" Stamped By A Professional Engineer, Without Pitch, Insulated Deck Pan If Applicable, Includes Wood Nailer & Hold Down Brackets. Meets Seismic Requirements for 2022 CBC & 2021 IBC. Wind Design Criteria: 60 Foot Tall Building Maximum, Exposure C, 155 MPH - 3 Second Gust Speed, Risk Category III & IV.

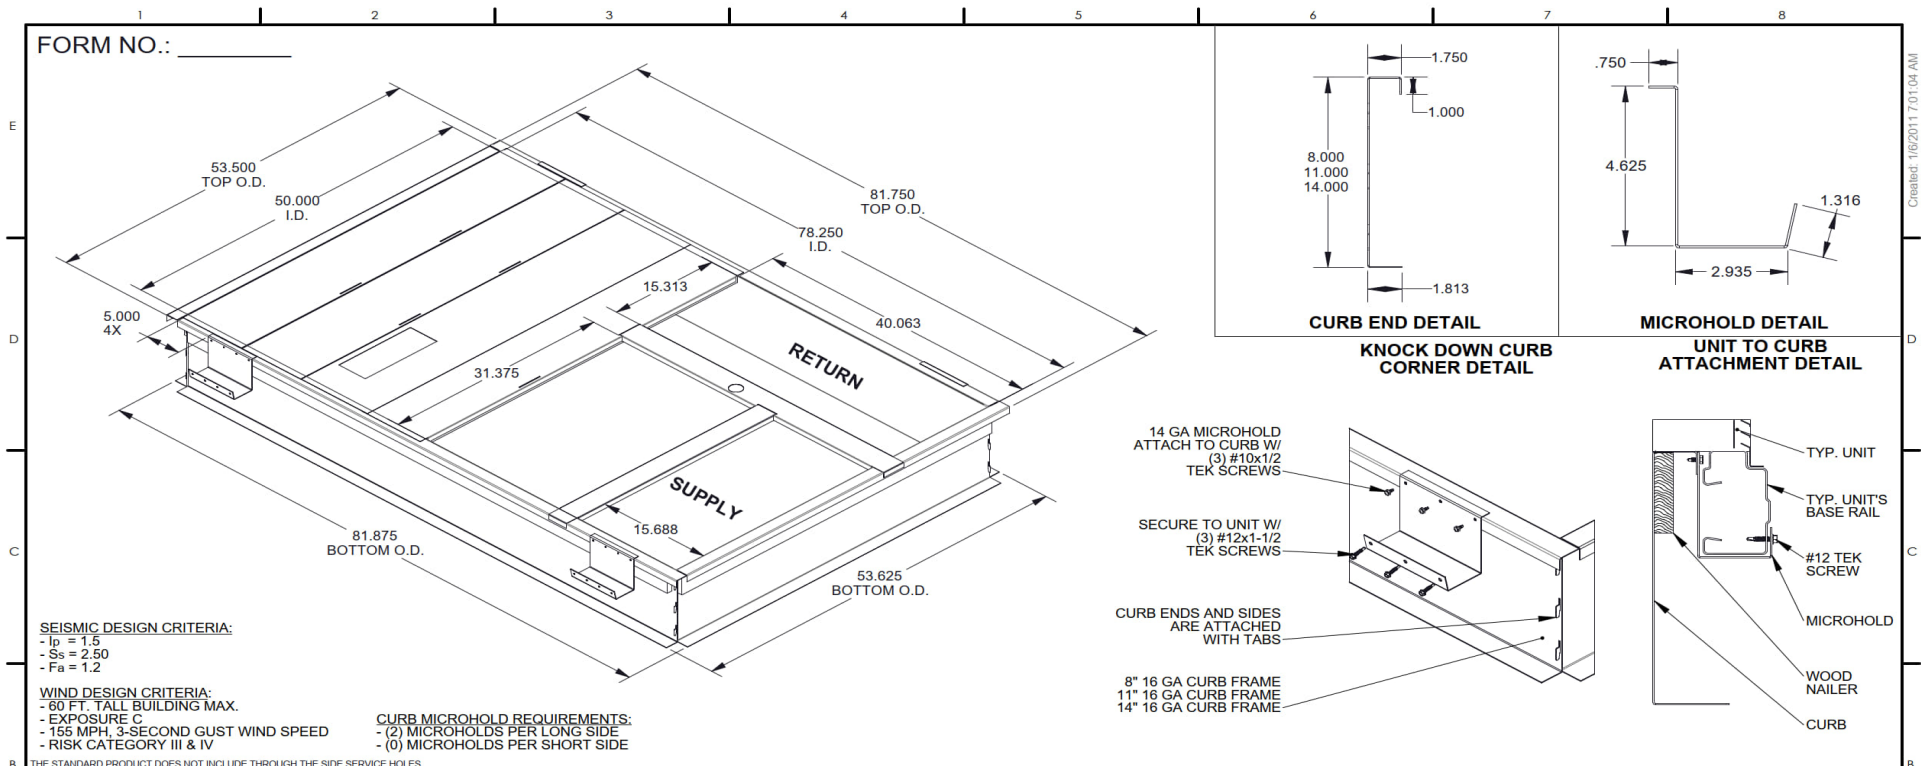

<b>MicroMetl Corporation</b>		CRBK-SRT34HA-08 Series    08" TALL    96 LBS. CRBK-SRT34HA-11 Series    11" TALL    110 LBS. CRBK-SRT34HA-14 Series    14" TALL    123 LBS.		STRUCTURALLY CALCULATED KNOCK DOWN CURB <b>MAX UNIT WEIGHT 1786 lbs.</b>			
		ALL DETAILS ARE CALCULATED USING THE SEISMIC DESIGN CRITERIA INDICATED ABOVE. FOR ANY OTHER TYPE OF ANCHORAGE THE EOR HAS THE OPTION TO CALCULATE THE ANCHORAGE USING SITE SPECIFIC PARAMETERS AND LOADS.					
Indianapolis, IN. (800) 662-4822  Sparks, NV. (800) 884-4662  Longview, TX. (903) 248-4800   DRAWN BY: IR    DATE 08/25/2022  <div style="border: 1px solid black; padding: 5px; text-align: center; font-size: 0.8em;">             MEETS SEISMIC REQUIREMENTS FOR 2022 CBC &amp; 2021 IBC               MEETS REQUIREMENTS FOR 155 MPH               60" BUILDING HEIGHT MAX.              3 SEC. GUST, EXP C           </div>		<b>ANCHORAGE DETAILS TO ROOF:</b> <b>TYPICAL PLAN VIEW:</b>  <b>STEEL ATTACHMENT:</b> (BEAM BY OTHERS)  (12) A307 1/2" DIA. BOLTS, W/ WASHER CENTERED ON FLANGE (1) EACH LONG SIDE (2) EACH SHORT SIDE (2) EACH CORNER a = 2" c = 6"		<b>WOOD ATTACHMENT:</b> (REF. DOUGLAS FIR)  (38) 1/4" x 3" SIMPSON SDS W/ WASHER, CENTERED ON CURB FLANGE (7) EACH LONG SIDE (2) EACH SHORT SIDE (4) EACH CORNER a = 1" c = 3"		<b>CONCRETE ATTACHMENT:</b> (3000 PSI MINIMUM, 6" MINIMUM THICKNESS) (4" MIN EDGE DISTANCE, 3-3/4" EMBEDDED)  (14) 1/2" SIMPSON TITEN HD, CENTERED ON CURB FLANGE, 8" MINIMUM SPACING (2) EACH LONG SIDE (1) EACH SHORT SIDE (2) EACH CORNER a = 3" c = 6"	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MICROMETL CORPORATION. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF MICROMETL CORPORATION IS PROHIBITED.							