




MicroMetl

Spec Sheet

CRBK-SRT34HA-1411

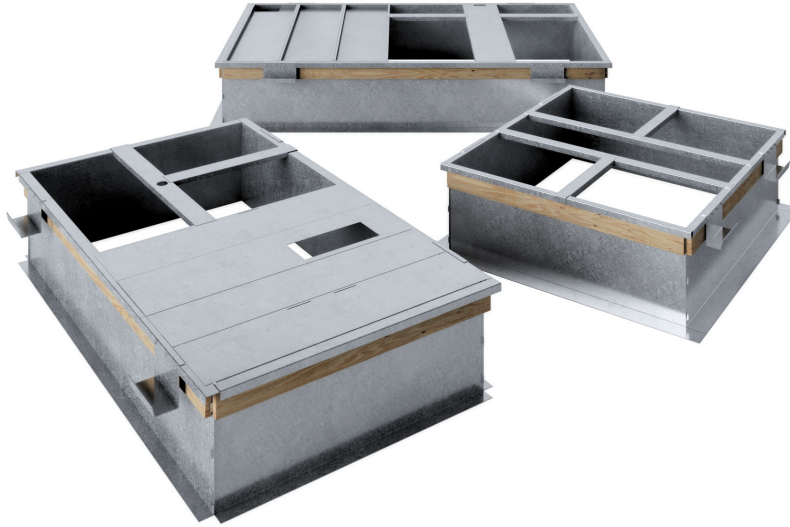

Refer To Submittal For Dimensions

Description: Knockdown Structurally Calculated Curb - 14 Inches Tall Non Insulated Full Perimeter Knockdown Structurally Calculated Curb, California State Standard, High Seismic Criteria, Includes Hold-Down Brackets. "Structurally" Stamped By A Professional Engineer, Without Pitch, Insulated Deck Pan If Applicable, Includes Wood Nailer & Hold Down Brackets. Meets Seismic Requirements for 2022 CBC & 2021 IBC. Wind Design Criteria: 60 Foot Tall Building Maximum, Exposure C, 155 MPH - 3 Second Gust Speed, Risk Category III & IV.

Weight: 123lbs/55.79kg

Assembled Length O.D.: 81.75

Assembled Width O.D.: 53.50

Corner Type: N/A

Composition: Galvanized Sheet Metal

Insulated: Non Insulated

Perimeter: Full Perimeter

Support Gauge: 16

Hold Down Gauge: 14

Deckpan: Included

Deckpan Gauge: N/A

Deckpan Description: Galvanized Metal, Using 1 Inch Insulation, R Value 4.2

Gasket: 9430-0100, 9430-0200

Gasket Description: 0.25 X 1.5 Inch Multipurpose Medium Density Foam Gasket.

Prop 65: Yes

Country of Origin: USA