

REVOLUTIONARY IAQ TECHNOLOGY

APCO-X is the result of more than a decade of development and is our most advanced indoor air treatment system. It combines UVC light and our proprietary activated carbon technology to safely & effectively neutralize odor-causing VOCs and biological contaminants. It not only treats the air but also helps keep the HVAC system clean and efficient and extend its life.

FEATURES/BENEFITS

Exclusive V-Twin EverCarbon Matrix™ with nanotech antimicrobial coating

Features 65% more effective surface area, improving performance 33% over previous model

Advanced 3-year UVC 254nm quartz lamp

Long lasting, safe and effective

Four-way 360° installation

For up-flow, down-flow & horizontal installations

UL Validated to produce no harmful ozone

Scientifically tested ensuring safety

Continuously treats the whole-system

Treats the air in the entire home all the time and is virtually maintenance free (UVC lamp replacement only)

Translucent polycarbonate housing

Strong, lightweight and reliable


LED status and lamp fault indicator

To provide operational feedback




SAFELY AND EFFECTIVELY TREAT THE OTHER 2/3RDS

Conventional filters are only effective against particulates, like dust. APCO-X is proven to safely reduce both biological and chemical contaminants inside the air system and throughout the building. Together, they address 99+% of the contaminants in the air.

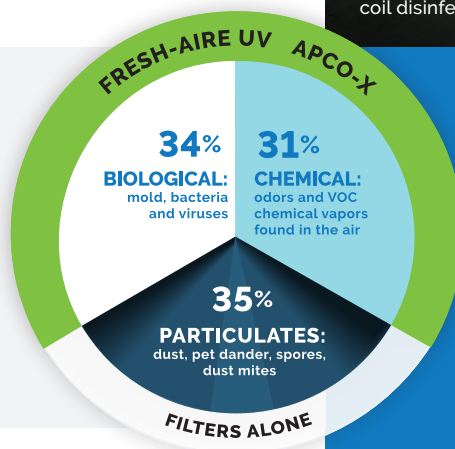

CLEANS THE COIL AND DRAIN PAN


Helps keep the HVAC system running efficiently and extend its life.

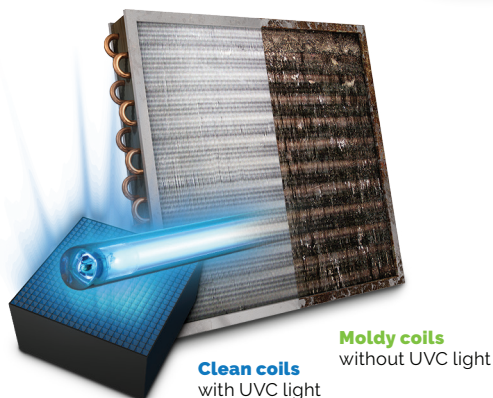

APCO-X Neutralizes Mold, Bacteria, Viruses, and Allergens

We are committed to developing and validating our products. APCO-X Testing achieved incredible results:


Fresh-Aire UV systems are not intended to diagnose, treat, prevent, or cure any disease.




Bacteria
(S.epideridis)*




Viruses
(MS2 coliphage)*



Mold
(A.niger)*



Odors
(VOCs)*




SARS-CoV-2 virus
within 3 seconds of exposure**

* % Reduction of common indoor air contaminants over 4 hours.
Tested at airflow velocity of 492-fpm (0.93m3/sec)

**The SARS-CoV-2 virus test was conducted at a distance of 6" on test surfaces in a laboratory setting.

SPECS

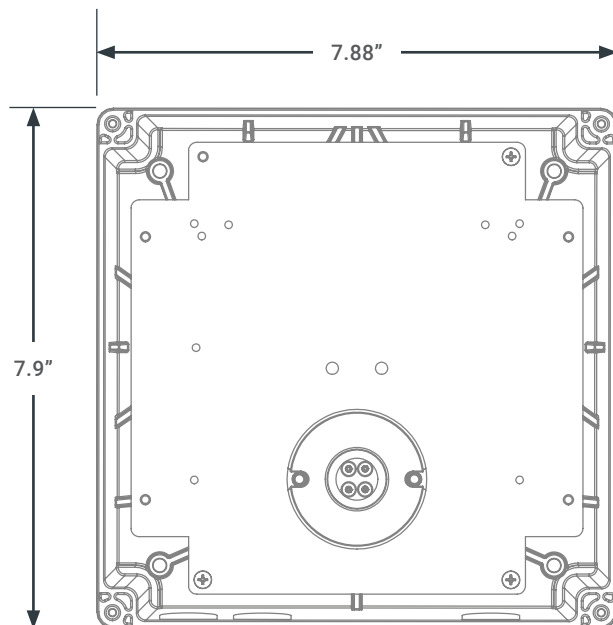


EPA
Est. Reg. No.
075179-FL-002

APCO-X Specs

UV Lamp	254 nm germicidal UV-C, quartz hot filament
Dimensions	Cell & Lamp: 5.8"W x 3.25"H x 13.2"D Enclosure: 7.6"L x 7.6"W x 2.2"D
ER models Electrical	18-32 VAC, 60 Hz, 0.68 Amps, 16 VA
SI DI models Electrical	110-277 VAC, 50/60 Hz, 0.51 Amps/120V Thru 0.22 Amps/277V
Pressure Drop	<0.01" w.c. @ 400 FPM
Warranty	Lifetime for all parts. UV lamp 3-years

Part Numbers

18-32 VAC		Replacement Lamp
TUV-APCOX-ER3	3 Year Lamp	TUVL-315
18-32 VAC with 2nd UV Lamp for Coil		Replacement Lamp
TUV-APCOX-DER3	3 Year Lamp (2)	TUVL-315
110-277 VAC		Replacement Lamp
TUV-APCOX-SI3-P	3 Year Lamp	TUVL-315
110-277 VAC with 2nd UV Lamp for Coil		Replacement Lamp
TUV-APCOX-DI3-P	3 Year Lamp (2)	TUVL-315

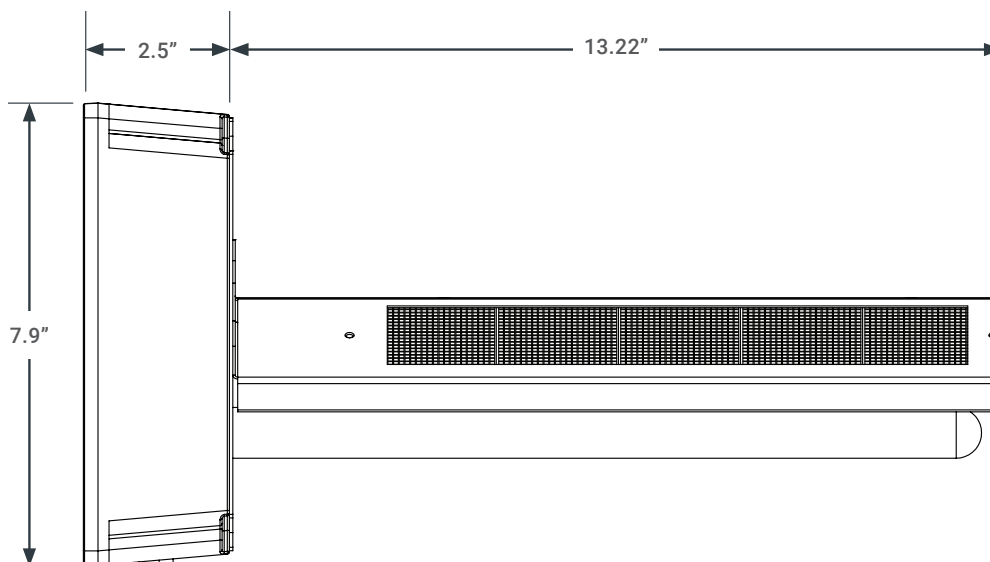

**DESIGNED &
ASSEMBLED
IN THE U.S.A.**