## Overview

The **BAPI-Guard** prevents tampering, physical damage and unauthorized adjustment of thermostats. The attractive, low profile design is available in two sizes to fit most thermostats. It is made of thick, durable polycarbonate and features exceptional airflow, key lock protection, horizontal or vertical mounting and easy installation with hardware included.

## Identification

***NOTE 1:*** The BAPI-Guard (above) and BAPI-Guard 2 (below) are shown in a size relative to each other.

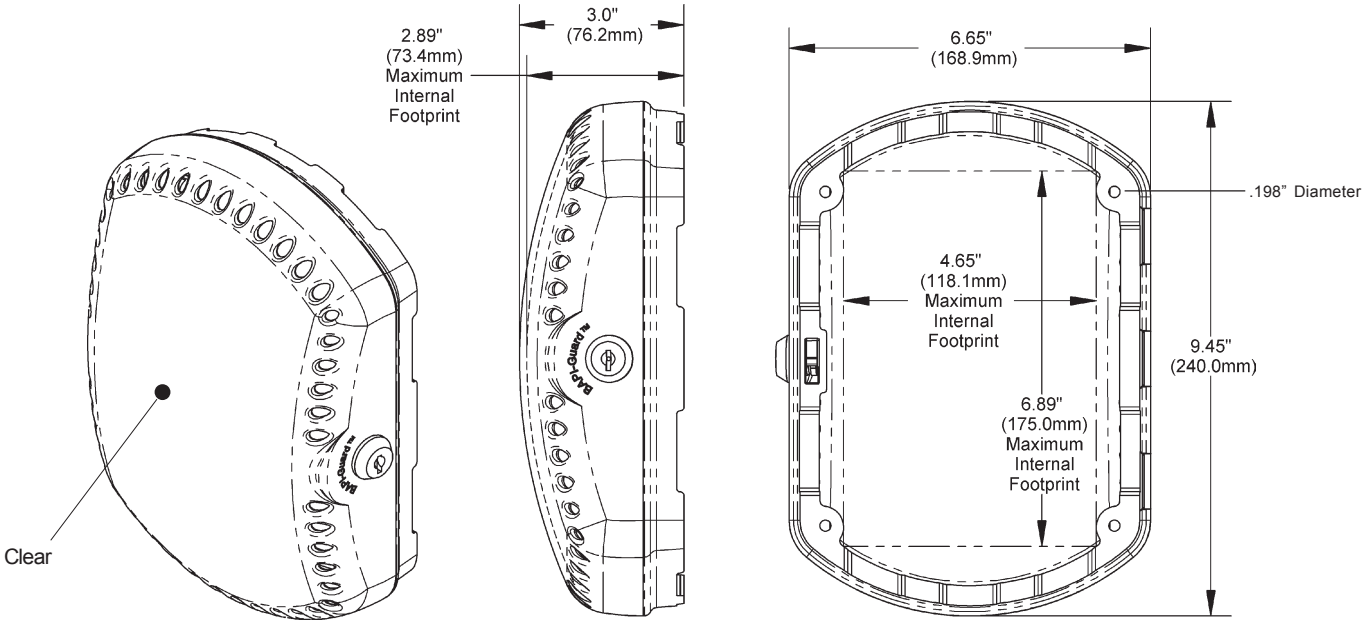



**Fig 1:** BAPI-Guard Dimensions **(BA/BG)** Mounting Hole Spacing:5.32” x 6.13”

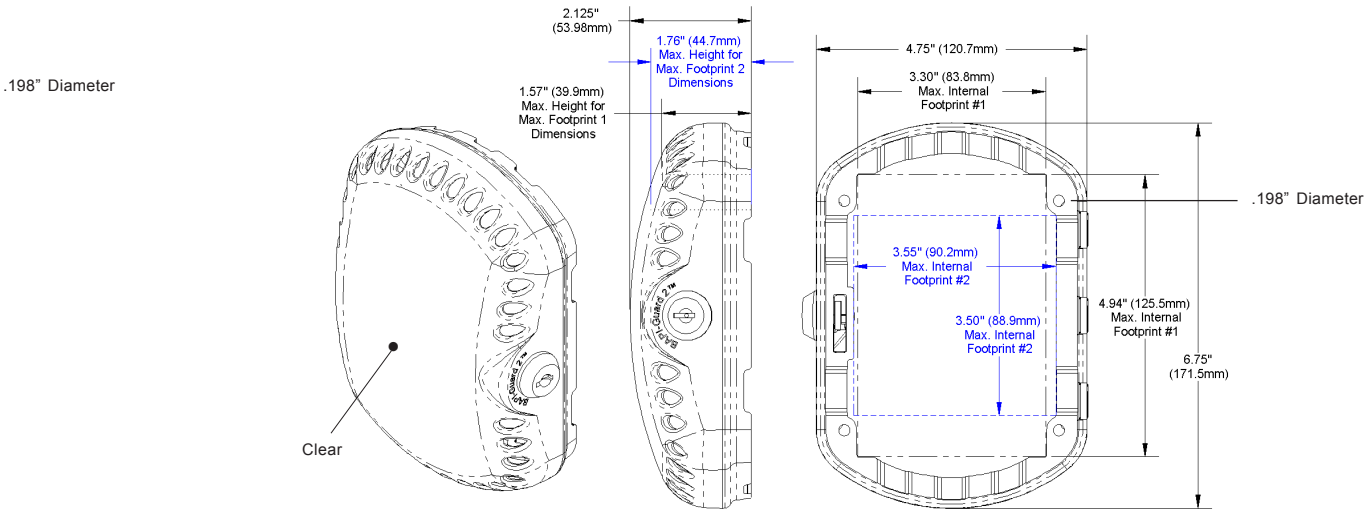



**Fig 2:** BAPI-Guard 2 Dimensions **(BA/BG2)** Mounting Hole Spacing: 3.76” x 4.02”

Specifications subject to change without notice.

## Mounting

The BAPI-Guard's cover comes off the mounting base; it does not rotate on a hinge. To remove the cover open the lock by rotating the key 1/4 turn clockwise, open the cover about 15 degrees to the base and push off to the "hinge" side.

Place the base over the device to be protected and mark for the mounting holes. Cover device to be protected with a damp towel to prevent dust from getting into protected device.

For drywall, drill four 9/32-inch (7.1mm) holes. Insert the anchors until they are flush with the wall surface. Attach the base to the wall with the drywall screws. (See figure 3 below)

For concrete or cinder block, drill four 5/32-inch (4mm) holes, 1-3/4 inch (45mm) deep. Attach the base to the wall with the concrete screws. (See figure 3 below)

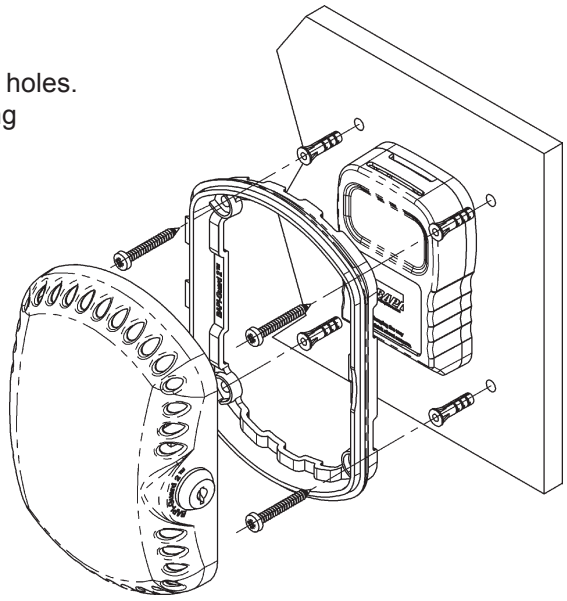


**Fig 3:** BAPI-Guard Mounting

***Note 2:*** One key fits all BAPI-Guard locks. Order BAPI part number **BA/KEY16187** for replacement keys.
***Note 3:*** You can only remove the key from the BAPI-Guard lock in the locked position.

## Specifications

| | |
|---|---|
| **Material** | Impact resistant Polycarbonate |
| **Construction** | Two piece (Base & removable Cover) |
| **Venting** | 360º using base channels and multiple 1/4" Ovals |
| **Lock** | Key operated cylinder w/hook latch |
| **Key** | Two keys included |
| **Replacement Key** | BA/KEY16187 |
| **Mounting** | Four tabs in the base ring |
| **Hardware Included** | 2-keys, Four #10-1.5" drywall screws Four #10-1.5" concrete screws |
| **Cleaning** | Water dampened cotton cloth as needed (Other chemicals could affect the sensor inside) |
| **Maintenance** | None required. (It may be worth checking the mount ing screws once a year for tampering.) |
| **Color** | Clear center w/ etched side wall |
| **Agency** | UL 94, V-0, RoHS |

**Mounting Hole Spacing**

| | |
|---|---|
| BA/BG | 5.32" X 6.13" (135 X 155.8 MM) |
| BA/BG2 | 3.76" x 4.02" (95.6 x 102 mm) |

**Typical Thermostats Accommodated**

| | |
|---|---|
| **BAPI-Guard** | BA/BS, BA/AQS-R, BA/420COBAPI-Stat, |
| Honeywell | T7300, T7350, T7560, TH8000, THx200, C7232A |
| Viconics - PECO | VT7600, VT7300, VT7200 - T170 |
| JCI | T600, A350, W351, P352, A319, A19ABC, A28AA |
| Telaire-Kele | 8000, 9200 - RTC2P, CDAWLCD |
| Vaisala - GE | HMW – GEHxS, EHRH |
| **BAPI-Guard 2** | Delta, BAPI-Stat 2, Decora, PreCon, Siemens/Powers |
| Honeywell | TB6980, TB7980, T6575, T8575, TH5100, T87, TH3100, TH4100 |
| JCI | T4000, T22, T25, T26 |
| Columbus Elec | ET5, ETD5, UT8001 |
| PECO | T155, T158, T167, T168 |
| Kele | CDKW, TP1M, KTR, EXECUTIVE |
| TAC/BC | TK1000, TK5000, TK2200, 2212 |
| Vaisala - GE | GMW – 5001 |

Specifications subject to change without notice.