



# i-Vu® Building Automation System VAV Zone II Single Duct

Part Number: OPN-VAVB1-02



The VAV Zone II Single Duct controller provides zone level temperature and air quality control for a variety of pressure-independent VAV applications. This advanced controller features a separable actuator for easy installation onto single duct air terminals. It also features native BACnet communications and plug-and-play connectivity to the Carrier i-Vu Building Automation System.



## Application Features

- Sophisticated factory-engineered and tested control programs provide reliability and energy efficiency
- Pressure independent space temperature control
- Supports modulating hot water, single-position hot water, single-stage electric heat, or zone perimeter heat
- Built-in advanced control routines for zone level humidity control or zone level demand control ventilation (ASHRAE® 62)
- Adaptive optimal start and PID control for maximum occupant comfort
- Supports Carrier communicating room sensors, which allow for local setpoint adjustment and local override
- Quick and easy test & balancing process


## Hardware Features

- Separable brushless actuator for reliability and longevity
- Capable of system or stand-alone operation
- Native BACnet MS/TP or ARCNET communications

## System Benefits

- Integrated Carrier airside linkage algorithm for plug-and-play integration with Carrier air sources
- Fully plug-and-play with the Carrier i-Vu Building Automation System
- Supports demand limiting for maximum energy savings
- Compatible with i-Vu Tenant Billing for tracking tenants' after-hours energy usage

## The Carrier i-Vu Open Control System

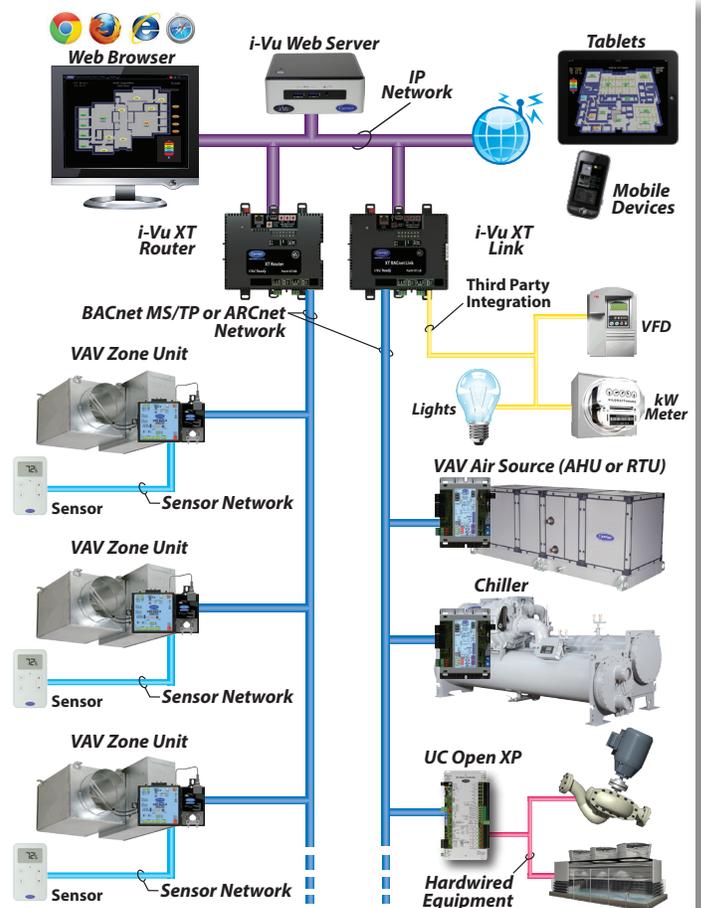

# i-Vu<sup>®</sup> Building Automation System

## VAV Zone II Single Duct




Part Number: OPN-VAVB1-02

### Specifications

<b>BACnet Support</b>	Advanced Application Controller (B-AAC), as defined in BACnet 135-2012 Annex L Protocol rev. 9
<b>Communication Ports</b>	<b>BACnet port:</b> EIA-485 port for BACnet MS/TP communications (9600 bps, 19.2 kbps, 38.4 kbps, & 76.8 kbps) or ARCNET 156 kbps; <b>Local Access port:</b> For system start-up and troubleshooting (115.2 kbps); <b>Rnet port:</b> For connecting Carrier communicating room sensors and Carrier's touchscreen user interface. <b>ACTnet port:</b> For connecting the actuator cable
<b>Separable Actuator</b>	Brushless DC motor, torque 45 inch-pounds (5Nm), runtime 154 seconds for 90 degree travel
<b>Integral Pressure Sensor</b>	Precision low flow AWM series 0–2 in. H <sub>2</sub> O, sensitive down to ±0.001 in. H <sub>2</sub> O. Barbed tapered airflow connections accept 3/16 in. (4.75 mm) I.D. tubing. Allows for readings across the 0–2 in. H <sub>2</sub> O range, accurate to ±5% of full flow at 2 in. H <sub>2</sub> O
<b>Inputs</b>	<b>3 analog inputs:</b> RH/CO <sub>2</sub> (0–5V), T55 (10k thermistor), SAT (10k thermistor). AI's have 10 bit A/D resolution. <b>1 binary input:</b> Remote Occupancy (dry contact).
<b>Outputs</b>	<b>1 binary output:</b> HEAT1. Relay contact rated at 1A max @ 24VAC/VDC, configured normally open. <b>1 analog output:</b> Hot Water Valve/Actuator (HWV/ACT). AO is 0 to 10VDC (5mA maximum) with 8 bit D/A resolution using filtered PWM.
<b>Protection</b>	Power and network connections protected by non-replaceable internal solid state resettable polyswitches. Power, network and I/O connections also protected against voltage transient and surge events lasting no more than 10 msec.
<b>Battery</b>	10-year Lithium CR2032 battery: min of 10,000 hours of trend data retention during power outages
<b>Status Indicators</b>	LED status indicators for BACnet communication, run status, error, power, and all digital outputs
<b>Controller Addressing</b>	Rotary DIP switches set BACnet MS/TP or ARCNET address
<b>Listed by</b>	<b>United States:</b> FCC compliant to Title CFR47, Part 15, Subpart B, Class A; UL Listed, File E143900; CCN PAZX, UL 916, Energy Management Equipment; <b>ANZ:</b> RCM Mark AS/NZS 61000-6-3; <b>Canada:</b> UL Listed File E143900, CCN PAZX7, CAN/CSA C22.2 No. 205 Signal Equip., Industry Canada Compliant ICES-003, Class A; <b>CE Mark</b> Compliant with 2014/30/EU, and RoHS Compliant: 2015/863/EU; <b>UKCA Mark</b> compliant with Electromagnetic Compatibility Regulations 2016 – Gov.UK and RoHS for Electrical and Electronic Equipment 2012
<b>Environmental Operating Range</b>	<b>Operating:</b> 32 to 130°F (0 to 54°C) 10 to 90% RH, non-condensing <b>Storage:</b> -24 to 140°F (-30 to 60°C) 0 to 90% RH, non-condensing
<b>Power Requirements</b>	24VAC ± 10%, 50-60Hz, 14 VA power consumption, 26VDC (25V min, 30V max), Single Class 2 source only, 100 VA or less

### Dimensions

<b>Overall</b>	<b>Mounting</b>
<b>A:</b> 5.10 in. (12.95 cm)	<b>D:</b> 7 in. (17.78 cm)
<b>B:</b> 8.93 in. (22.68 cm)	<b>E:</b> 4.89 in. (12.42 cm)
<b>C:</b> 5.87 in. (14.90 cm)	<b>F:</b> 1.04 in. (2.64 cm)
	<b>G:</b> 1.46 in. (3.71 cm)
	<b>H:</b> 2.55 in. (6.48 cm)
	<b>I:</b> 0.58 in. (1.47 cm)
<b>Depth:</b> 2.5 in. (6.4 cm)	
<b>Weight:</b> 1.8 lbs (0.82 kg)	
<b>Minimum Shaft Diameter:</b> 3/8 in. (.95 cm)	
<b>Maximum Shaft Diameter:</b> 1/2 in. (1.27 cm)	
<b>Minimum Shaft Length:</b> 1-3/4 in. (4.45 cm)	

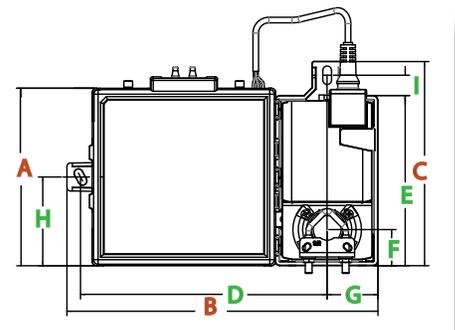

For more information, contact your local Carrier Controls Expert.

Controls Expert Locator:  
[www.carrier.com/controls-experts](http://www.carrier.com/controls-experts)