
MicroMetl

Since 1965

Spec Sheet

CRBK-SPPSMGA-111H

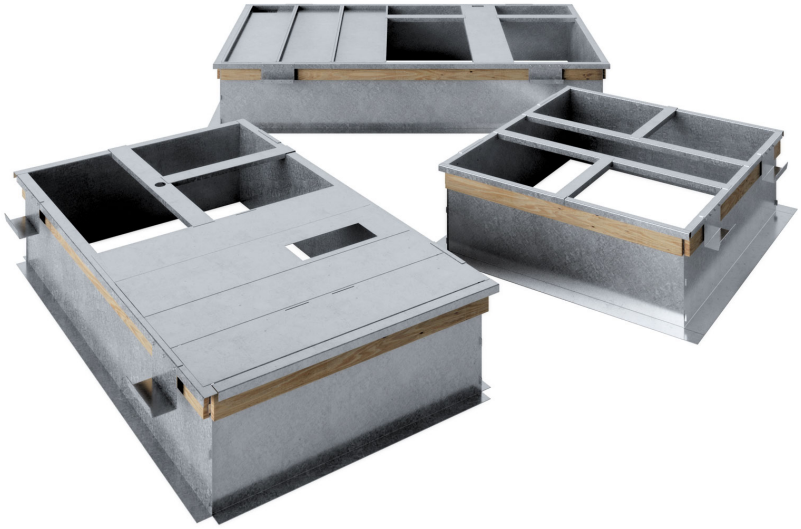

Refer To Submittal For Dimensions

Description: Knockdown Structurally Calculated Curb - 11 Inches Tall Non Insulated Full Perimeter Knockdown Structurally Calculated Curb, California State Standard, High Seismic Criteria, Includes Hold-Down Brackets. "Structurally" Stamped By A Professional Engineer, Without Pitch, Insulated Deck Pan If Applicable, Includes Wood Nailer & Hold Down Brackets. Meets Seismic Requirements for 2019 CBC & 2018 IBC. Wind Design Criteria: 60 Foot Tall Building Maximum, Exposure C, 155 MPH - 3 Second Gust Speed, Risk Category III & IV.

Weight: 51lbs/23.13kg
Assembled Length O.D.: 46.04
Assembed Width O.D.: 30.61
Corner Type: N/A

Composition: Galvanized Sheet Metal
Insulated: Non Insulated
Perimeter: Full Perimeter
Support Gauge: 18
Hold Down Gauge: 14
Deckpan: Included
Deckpan Gauge: N/A
Deckpan Description: Galvanized Metal, Using 1 Inch Insulation, R Value 4.2

Gasket: 9430-0100, 9430-0200, 9430-2800
Gasket Description: 0.25 X 1.5 Inch Multipurpose Medium Density Foam Gasket. 0.75 X 1.0 Inch Two Pound Polyester Urethane Sealing Gasket.

Prop 65: Yes
Country of Origin: USA