



Date:	Weight: 68lbs (US) 30.84kg (Metric)	Part Number: ECD-SRT34CB-D00B
RTU:		


Submitted to:	Approved by:	Notes:
---------------	--------------	--------

Economizer - Economizer - Genesis Ultra Low Leak Economizer, Vertical Orientation, Actuator Only for 3rd Party Economizer Controls - No Controller, No Sensor, Belimo Actuator. Painted Rain Hood With Aluminum Filter, Barometric Relief, All Necessary Panels And Hardware Included. Must Field Provide 2-10 VDC Controllers & Sensors.

FEATURES:

- External gear driven dampers with roll formed blades.
- Designed for vertical applications only.
- Factory assembled rain hood, with aluminum water entrainment filters.
- Filter access door supplied with RTU.
- Hinged filter access door is ordered separately.
 - MMC P/# for Chassis 3 - ECD-SRT3CA-HDOOR
 - MMC P/# for Chassis 4 - ECD-SRT4CA-HDOOR
- Rain hood is sloped for water run off.
- All harnesses and plugs needed are supplied.
- Economizer is class 1A & AMCA rated.
- Relief blades are AMCA rated.
- Uses filter rack with unit.
- Motorized relief available, add -M to end of part number
 - Ex: ECD-SRT34CB-D00H-M
- Economizer with smoke detector available, add -S to end of part number
 - Ex: ECD-SRT34CB-D00H-S


Direct coupled
actuator mount

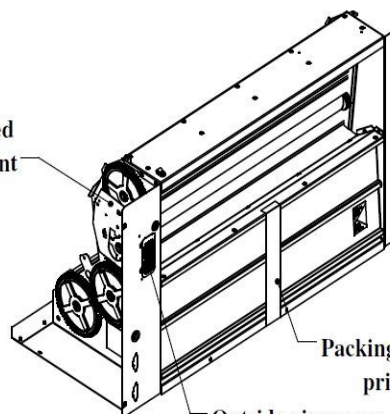

Packing tape. To be removed
prior to installation.

Outside air sensor
location

Hinged filter access door,
sold separately.

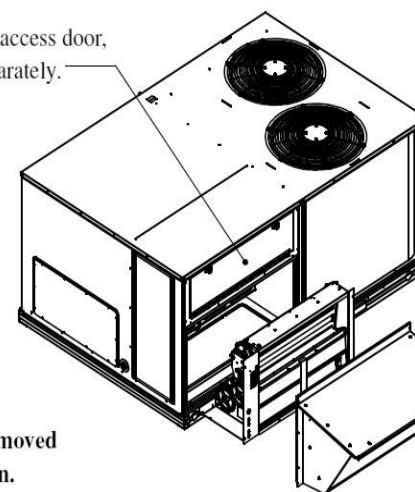


21.784
O/A HOOD
DEPTH

-Control Types

-D0DB-4	RTU Open - Premier Link - System VU, No controller, Adjustable dry bulb, Belimo actuator
-D0DB-X	Comfortlink - No controller, Adjustable dry bulb, Belimo MFT actuator with 500 ohm resistor
-D00H-H	Communicating Honeywell actuator only
-D00H	Non-communicating Honeywell actuator only
-D00B	Belimo actuator with feedback and end switch
-D00S	Siemens actuator with feedback


17.795
ECONOMIZER
DEPTH

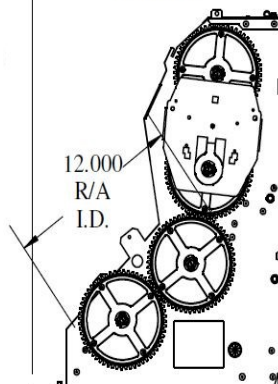

12.000
R/A
I.D.

39.219
ECONOMIZER O.D.

31.905
O/A, R/A, RELIEF I.D.

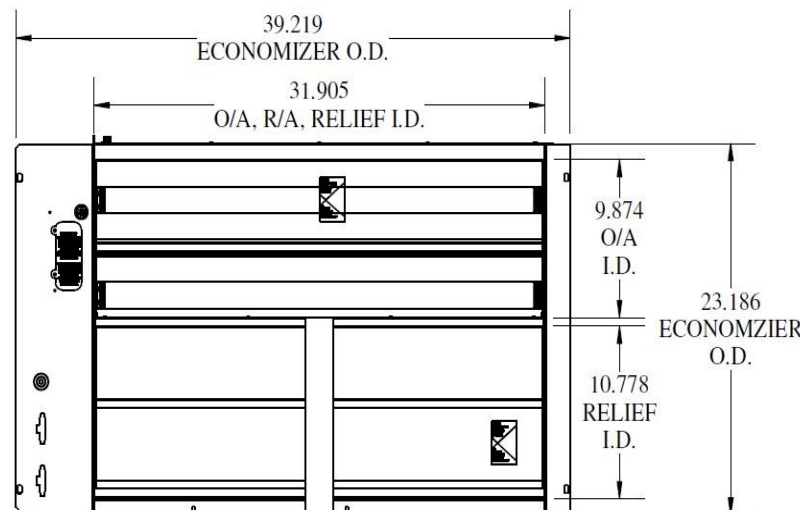


9.874
O/A
I.D.

23.186
ECONOMIZER
O.D.

10.778
RELIEF
I.D.



	Date:	Weight: 68lbs (US) 30.84kg (Metric)	Part Number: ECD-SRT34CB-D00B
	RTU:		
Submitted to:		Approved by:	Notes:
<p>Economizer - Economizer - Genesis Ultra Low Leak Economizer, Vertical Orientation, Actuator Only for 3rd Party Economizer Controls - No Controller, No Sensor, Belimo Actuator. Painted Rain Hood With Aluminum Filter, Barometric Relief, All Necessary Panels And Hardware Included. Must Field Provide 2-10 VDC Controllers & Sensors.</p>			
<p><u>Compliant Economizer:</u></p> <ol style="list-style-type: none"> Title 24: Economizers meet California Energy Commission Title 24-2013 / 2016 prescriptive section 140.4 (damper leakage etc.), and when used with Carrier Comfortlink, RTU Open, System Vu, or I/O Flex 6126 control systems, meet mandatory section 120.2.i for Fault Detection and Diagnostic requirements. 5 Year Warranty for parts and components only. ASHRAE 90.1: Economizers meet ASHRAE 90.1-2013/2016 damper leakage requirements, and meet 2016 Fault Detection and Diagnosis requirements when used with Carrier Comfortlink, RTU Open, System Vu, or I/O Flex 6126 control systems. IECC: Economizers meet IECC 2012, IECC 2015, and IECC 2018 for outside air, return air, and relief damper (when provided) leakage requirements, and when used with Carrier Comfortlink, RTU Open, System Vu, or I/O Flex control systems meet IECC 2015 and IECC 2018 for Fault Detection and Diagnostic requirements. Note: IECC 2015 and IECC 2018 requires differential return air sensor, which must be ordered separately. AMCA: Outside air and return air (volume) dampers are AMCA Class 1A rated at 1" w.g. Refer to MicroMetl NS2 catalog sheet on web site for details. Relief air dampers (when provided) are also AMCA rated. Refer to GR1 series catalog sheet on web site for details. <p><u>Features:</u></p> <ul style="list-style-type: none"> For single or 2 speed indoor fan units. Other control options available. Gear driven design for trouble-free operation, eliminating slippage and binding associated with standard linkage. Includes assembled rainhood with aluminum water entrainment filters in the outside air section. Rainhood is sloped for water run-off. Built-in barometric relief damper provided. Power exhaust options available. All harnesses and plugs needed are provided. Uses standard factory filter access door shipped with HVAC unit. If factory hinged access door option is installed on unit, an additional kit is required to seal hinged door properly. <ul style="list-style-type: none"> OEM part no. CRPECONV004A00 or MicroMetl part number 0640-0200-HDANGL <p><u>Notes:</u></p> <ol style="list-style-type: none"> Control systems include DDC actuator, and some models include 500 OHM resistor and outside air temperature sensor. Differential return air sensor if required can be ordered from OEM unit factory, and is field installed in return duct. ASHRAE, IECC, and Title 24 require the economizer controller be capable of reporting faults to a fault management application accessible by day-to-day operating or service personnel, or annunciated locally on zone thermostats or in some codes other devices are acceptable. Refer to applicable code requirements and to DDC controller for options. 			
<small>This Document Is The Property Of MicroMetl Corporation And Is Delivered Upon The Express Condition That The Contents Will Not Be Disclosed Or Used Without MicroMetl's Written Consent. MicroMetl Reserves The Right To Discontinue, Or Change At Any Time, Specifications & Designs Without Any Notice Incurring Obligations.</small>		Master Revision 0001A Page Revision 0001A	



MicroMetl Corporation certifies that the models GR1 and NS2 shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with requirements of the AMCA Certified Ratings Programs. The AMCA Certified Ratings Seal applies to Air Leakage and Air Performance ratings.