



Date:  
RTU:

Weight: 89lbs (US) 40.37kg (Metric)


Part Number: OA3-MRT69CB-D20S

Submitted to:

Approved by:

Notes:

Hood - Unit Specific - Motorized Damper - 3-Position- 100% Outside Air , 100% Outside Air - 69.875 X 16 X 23 , Aluminium Air Filter , Painted Color Gray. Includes Outside Air Hood, Modulating Actuator, Honeywell W7220 Jade Control Logic, May Be Used With A Vertical Or Horizontal Discharge Unit - For Use With One or Two Speed Units, Ultra Low Leak Damper

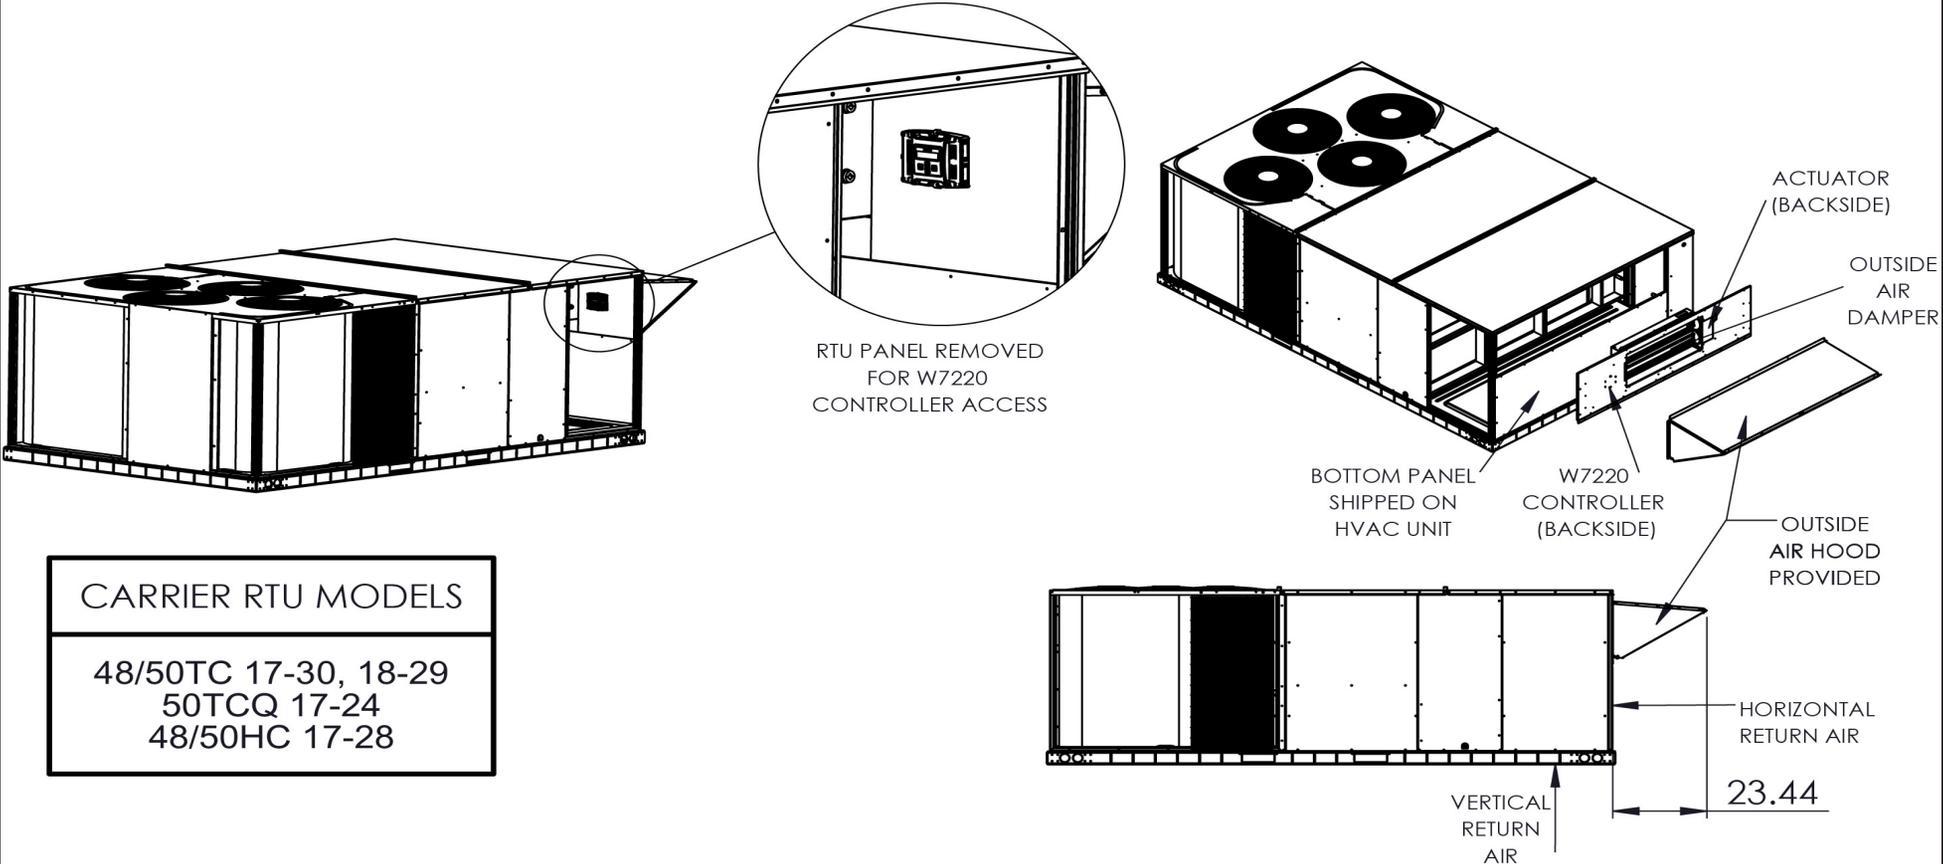

CARRIER RTU MODELS
48/50TC 17-30, 18-29
50TCQ 17-24
48/50HC 17-28

1. W7220 CONTROLLER ALLOWS 2 MINIMUM POSITION SETPOINTS FOR TWO SPEED UNITS. WIRING LEADS FOR OPTIONAL CO2 SENSOR INCLUDED.
2. DAMPER MAY BE USED IN A VERTICAL OR HORIZONTAL APPLICATION.
3. ALL NECESSARY PANELS INCLUDED.
4. OUTSIDE AIR HOOD, DAMPER, DAMPER ACTUATOR, HONEYWELL W7220 CONTROLLER, WIRING HARNESS WITH 12-PIN PLUG, AND UNIT PANEL(S) INCLUDED.
5. FILLER PANEL PROVIDED FOR TALLER UNITS LISTED.

This Document Is The Property Of MicroMetl Corporation And Is Delivered Upon The Express Condition That The Contents Will Not Be Disclosed Or Used Without MicroMetl's Written Consent. MicroMetl Reserves The Right To Discontinue, Or Change At Any Time, Specifications & Designs Without Any Notice Incurring Obligations.

Master Revision 0001A  
Page Revision 0001A