# MicroMetl

Since 1965

**Spec Sheet**

CRBK-SPPLGHA-081H

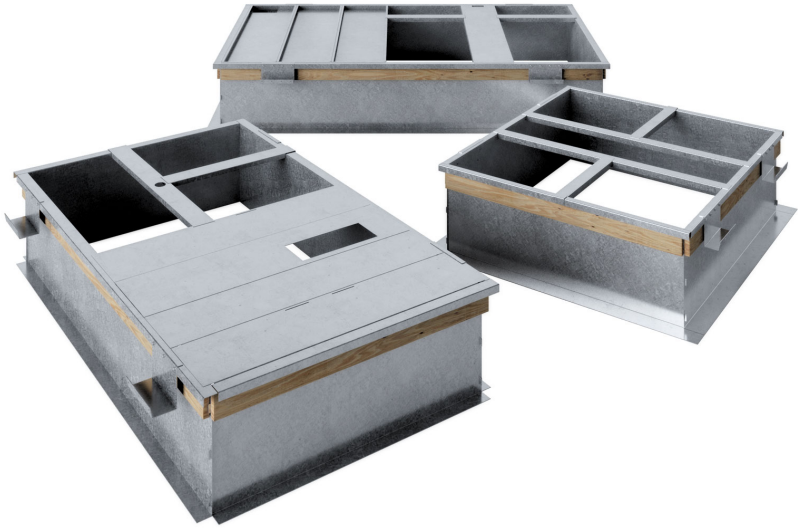

## Refer To Submittal For Dimensions

**Description:** Knockdown Structurally Calculated Curb - 8 Inches Tall Non Insulated Full Perimeter Knockdown Structurally Calculated Curb, California State Standard, High Seismic Criteria, Includes Hold-Down Brackets. "Structurally" Stamped By A Professional Engineer, Without Pitch, Insulated Deck Pan If Applicable, Includes Wood Nailer & Hold Down Brackets. Meets Seismic Requirements for 2022 CBC & 2021 IBC. Wind Design Criteria: 60 Foot Tall Building Maximum, Exposure C, 155 MPH - 3 Second Gust Speed, Risk Category III & IV.

**Weight:** 57lbs/25.86kg
**Assembled Length O.D.:** 46.04
**Assembed Width O.D.:** 42.17
**Corner Type:** N/A

**Composition:** Galvanized Sheet Metal
**Insulated:** Non Insulated
**Perimeter:** Full Perimeter
**Support Gauge:** 18
**Hold Down Gauge:** 14
**Deckpan:** Included
**Deckpan Gauge:** N/A
**Deckpan Description:** Galvanized Metal, Using 1 Inch Insulation, R Value 4.2

**Gasket:** 9430-0100, 9430-0200, 9430-2800
**Gasket Description:** 0.25 X 1.5 Inch Multipurpose Medium Density Foam Gasket. 0.75 X 1.0 Inch Two Pound Polyester Urethane Sealing Gasket.

**Prop 65:** Yes
**Country of Origin:** USA