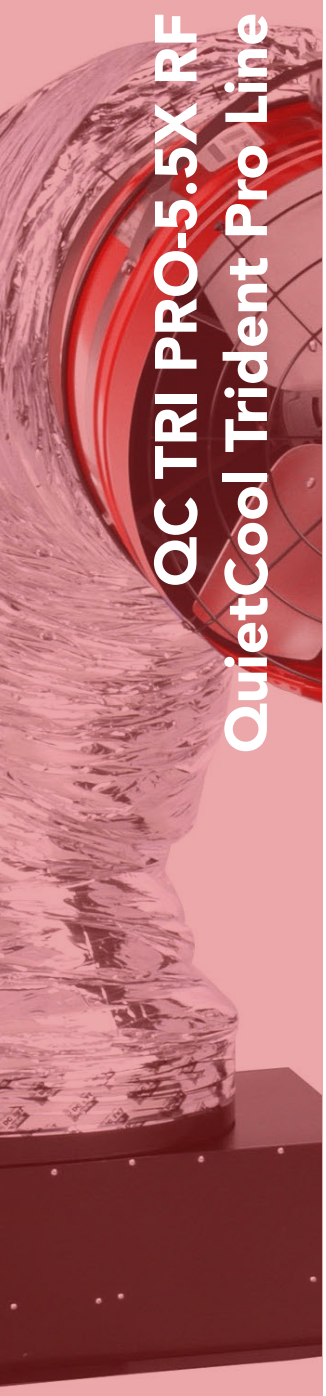

QC TRI PRO-5.5X RF
QuietCool Trident Pro Line

QuietCool
ADVANCED WHOLE HOUSE FANS

QC TRI PRO-5.5X RF Specifications

Airflow	Hi: 5,068 CFM / Low: 4,438 CFM
HVI-916 Airflow (for CA Title 24 New Construction)	Hi: 3,940 CFM / Low: 3,220 CFM
Recommended SQFT Coverage @ 2-3 CFM per SQFT	Covers 1,689 SQFT to 2,534 SQFT
Energy Use	Hi: 632 Watts / Low: 522 Watts
Amps	Hi: 5.56 / Low: 4.53
Motor Voltage	120 VAC, 60 Hz
# of Speeds	2
dBA	Hi: 51.2 / Low: 45.7
Minimum Attic Clearance	38″
Duct Diameter	20″
Duct Length	9 feet
Motor Head Diameter	20 1/2″
Motor Head Length	13 1/2″
Dampers	Barometric Pressurized R5 Dampers
Controls	Included IT-36003 QuietCool Wireless RF Control Kit with Glass Wireless RF Switch
Warranty	Limited Lifetime
Framing	None Required
Joist Cutting	None Required; fits 16″ or 24″ on center
Minimum Suggested Attic Venting	6.76 SQ FT net free area
Ceiling Rough Opening	14 1/4″ x 30 1/4″
Removable Grille Outside Dimension	16″ x 32″
Shipping Weight	75 lbs.
Box Dimensions	39″ x 24″ x 39″
In The Box	-QC TRI PRO-5.5X Motorhead -Ceiling Grille -Cut-out Template -Window Locks -Damper Box -9 Foot Duct -Accessory Bag -Wireless RF Control Kit

For more information, visit our website at:
QUIETCOOLSYSTEMS.COM

Intertek
5020138

Rev. 10/2/24