i-Vu® Building Automation System
TruVu™ Compact Link
Part Number: TV-CLB-E2

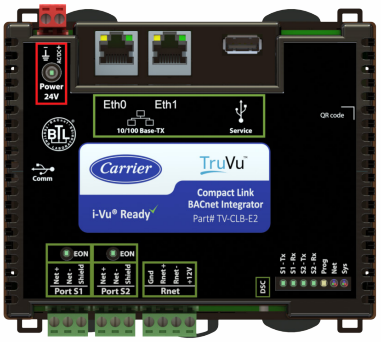

The TruVu Compact Link is a router and gateway in one. It features dual IP ports for convenient daisy-chain deployment and offers robust routing capabilities between BACnet®/IP, BACnet Ethernet, and BACnet MS/TP networks, while also supporting BACnet and Modbus integration to third party devices.

Link Features

- BACnet Testing Laboratories (BTL) certified
- Conforms to BACnet Router (B-RTR), and BACnet BBMD (B-BBMD) standard device profiles
- Supports BACnet routing between BACnet/IP, BACnet/Ethernet and BACnet/MSTP networks
- Can serve as the BACnet Broadcast Management Device (BBMD)
- Supports Modbus RTU and Modbus IP
- Supports up to 1,500 third-party BACnet points and up to 500 Modbus points (IP or Modbus RTU)
- Supports BACnet Foreign Device Registration (FDR)
- Supports SNAP graphical programs to create custom sequences

Hardware Features

- IPv4 networks are supported
- Two 10/100 Mbps Ethernet Ports with fail-safe relay
- One isolated MS/TP Port, supporting speeds from 9.6 to 115.2 Kbps
- USB service port for local service: connect PC via a hard-wired connection or wirelessly using a USB-W adapter
- Compact footprint simplifies installation and optimizes panel space

System Benefits

- Connects seamlessly to the i-Vu building automation system

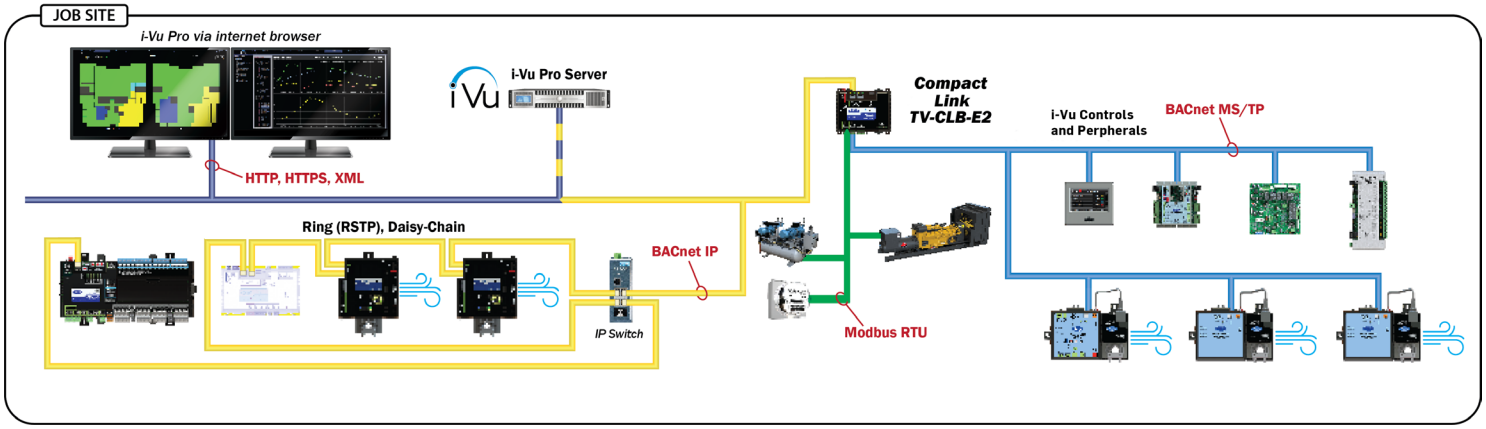

i-Vu® Building Automation System
TruVu Compact Link
Part Numbers: TV-CLB-E2

Specifications

BACnet Support	Conforms to the BACnet Building Controller (B-BC), BACnet Router (B-RTR), and BACnet Broadcast Management Device (B-BBMD) Standard Device Profile as defined in ANSI/ASHRAE Standard 135-2012 (BACnet) Annex L, Protocol Revision 15
Power Requirements	24 Vac ± 10%, 50-60 Hz, 50 VA 24 Vdc ± 10%, 18 W
Communication Ports	**Max Integration Points:** Supports 1,500 BACnet points and 500 Modbus points (IP or Modbus RTU) **Eth0,Eth1:** 10/100 BaseT, full duplex, Ethernet ports with built-in fail safe. Supports direct connection or daisy chain topology natively using BACnet/IP and/or BACnet Ethernet, or Modbus TCP/IP communication. **Port S1:** For communication with a BACnet MS/TP network at 9600 to 115200 bps or with a Modbus serial network at 9600 to 115200 bps. **Port S2:** For communication with a BACnet MS/TP network at 9600 to 115200 bps or with a Modbus serial network at 9600 to 115200 bps. **End of Net** switch can be turned on to terminate the network segment. **Rnet:** Supports up to 15 ZS sensors and one Equipment Touch or TruVu™ Equipment Touch.; Supplies 12 VDC/260 mA power to the Rnet across its rated temperature range. **Service Port:** USB 2.0 host port for setting up the controller and troubleshooting through a local connection to a computer, connecting to the TruVu™ Equipment Touch, or the Carrier USB Wireless service adapter.
Protection	Device is protected by a replaceable, fast acting, 250Vac, 3A, 5mm x 20mm glass fuse. The power and network ports comply with the EMC requirements EN50491-5-2.
Real-Time Clock	Real-time clock keeps track of time in the event of a power failure for up to 3 days.
LED Status Indicators	Tricolor **NET** LED to show network status / Tricolor **SYS** LED to show system status/**POWER** LED/ **S1 EON** LED/**S2 EON** LED/A **TX** (Transmit) and **RX** (Receive) LED for: Port S1 and S2
Environmental Operating Range	40 to 158°F (-40 to 70°C), 10-95% relative humidity, non-condensing The TV-CLB-E2 is suitable for installation inside or outside the building envelope. It should be placed in a UL Listed enclosure. If installed outside, the enclosure must be suitable for the environmental conditions.
Compliance	United States of America: FCC compliant to Title CFR47, Chapter 1, Subchapter A, Part 15, Subpart B, Class A; UL Listed to UL 916, PAZX, Energy Management Equipment; Canada: Industry Canada Compliant, ICES-003, Class A cUL Listed UL 916, PAZX7, Energy Management Equipment; Europe: Mark, UK: EN50491-5-2:2009; Part 5-2: EMC requirements for HBES/BACS used in residential, commercial and light industry environment RoHS Compliant: 2015/863/EU REACH Compliant; Australia and New Zealand: C-Tick Mark, AS/NZS 61000-6-3
Physical	Fire-retardant plastic ABS, UL94-5VA
Mounting	35mm DIN rail mounting or screw mounting
Dimensions	**Overall** **A:** 5.51 in. (14 cm) **D:** 5.88 in. (14.93 cm) **E:** 4.41 in (11.20 cm) **Depth:** 2.01 in. (5.11 cm) **Weight:** .75 lbs. (.3402 kg) **Mounting** **B:** 3.00 in. (7.62 cm) **C:** 5.29 in. (13.44 cm)



© Carrier 2024. All Rights Reserved. **Cat. No. 11-808-1076-01 Rev. 5/24**
Manufacturer reserves the right to discontinue, or change at any time, specifications or designs, without notice and without incurring obligations. Trademarks are properties of their respective companies and are hereby acknowledged.

For more information, contact your local Carrier Controls Expert.

Controls Expert Locator:
www.carrier.com/controls-experts