




i-Vu® Building Automation System

TruVu™ Compact Link

Part Number: TV-CLB-E2

TruVu

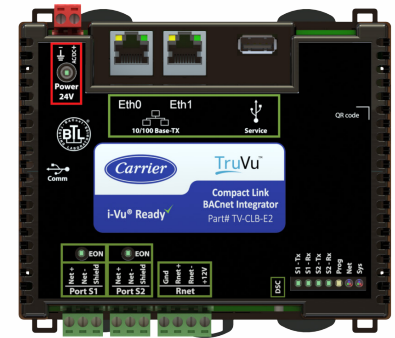

The TruVu Compact Link is a router and gateway in one. It features dual IP ports for convenient daisy-chain deployment and offers robust routing capabilities between BACnet®/IP, BACnet Ethernet, and BACnet MS/TP networks, while also supporting BACnet and Modbus integration to third party devices.



Link Features


- BACnet Testing Laboratories (BTL) certified
- Conforms to BACnet Router (B-RTR), and BACnet BBMD (B-BBMD) standard device profiles
- Supports BACnet routing between BACnet/IP, BACnet/Ethernet and BACnet/MSTP networks
- Can serve as the BACnet Broadcast Management Device (BBMD)
- Supports Modbus RTU and Modbus IP
- Supports up to 1,500 third-party BACnet points and up to 500 Modbus points (IP or Modbus RTU)
- Supports BACnet Foreign Device Registration (FDR)
- Supports SNAP graphical programs to create custom sequences

Hardware Features

- IPv4 networks are supported
- Two 10/100 Mbps Ethernet Ports with fail-safe relay
- One isolated MS/TP Port, supporting speeds from 9.6 to 115.2 Kbps
- USB service port for local service: connect PC via a hard-wired connection or wirelessly using a USB-W adapter
- Compact footprint simplifies installation and optimizes panel space

System Benefits

- Connects seamlessly to the i-Vu building automation system

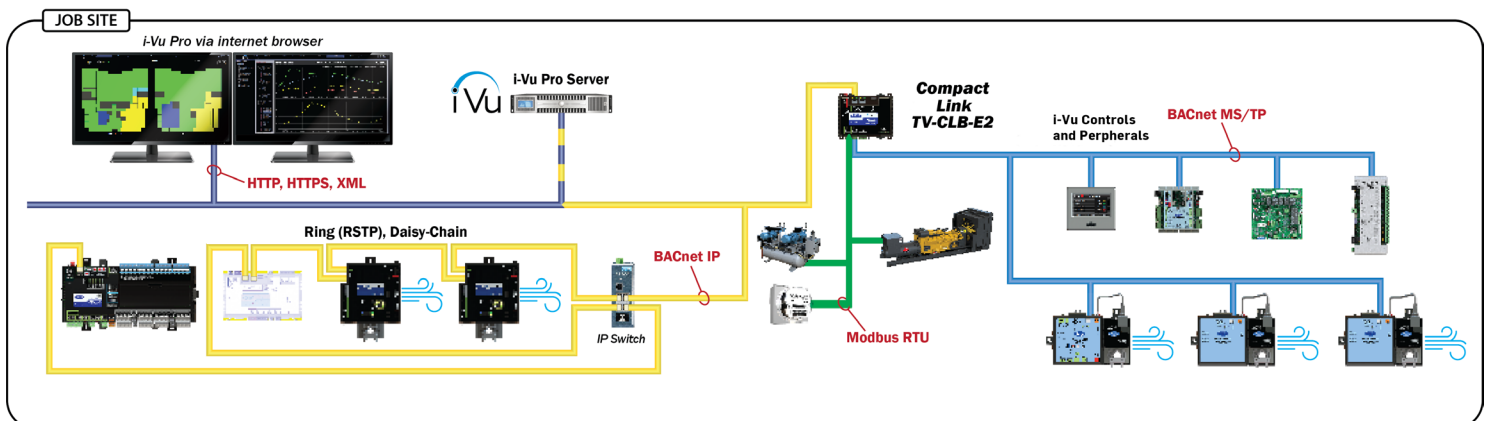

i-Vu[®] Building Automation System

TruVu Compact Link

Part Numbers: TV-CLB-E2



Specifications

BACnet Support	Conforms to the BACnet Building Controller (B-BC), BACnet Router (B-RTR), and BACnet Broadcast Management Device (B-BBMD) Standard Device Profile as defined in ANSI/ASHRAE Standard 135-2012 (BACnet) Annex L, Protocol Revision 15
Power Requirements	24 Vac \pm 10%, 50-60 Hz, 50 VA 24 Vdc \pm 10%, 18 W
Communication Ports	<p>Max Integration Points: Supports 1,500 BACnet points and 500 Modbus points (IP or Modbus RTU)</p> <p>Eth0, Eth1: 10/100 BaseT, full duplex, Ethernet ports with built-in fail safe. Supports direct connection or daisy chain topology natively using BACnet/IP and/or BACnet Ethernet, or Modbus TCP/IP communication.</p> <p>Port S1: For communication with a BACnet MS/TP network at 9600 to 115200 bps or with a Modbus serial network at 9600 to 115200 bps.</p> <p>Port S2: For communication with a BACnet MS/TP network at 9600 to 115200 bps or with a Modbus serial network at 9600 to 115200 bps.</p> <p>End of Net switch can be turned on to terminate the network segment.</p> <p>Rnet: Supports up to 15 ZS sensors and one Equipment Touch or TruVu[™] Equipment Touch.; Supplies 12 VDC/260 mA power to the Rnet across its rated temperature range.</p> <p>Service Port: USB 2.0 host port for setting up the controller and troubleshooting through a local connection to a computer, connecting to the TruVu[™] Equipment Touch, or the Carrier USB Wireless service adapter.</p>
Protection	Device is protected by a replaceable, fast acting, 250Vac, 3A, 5mm x 20mm glass fuse. The power and network ports comply with the EMC requirements EN50491-5-2.
Real-Time Clock	Real-time clock keeps track of time in the event of a power failure for up to 3 days.
LED Status Indicators	Tricolor NET LED to show network status / Tricolor SYS LED to show system status/ POWER LED/ S1 EON LED/ S2 EON LED/A TX (Transmit) and RX (Receive) LED for: Port S1 and S2
Environmental Operating Range	40 to 158°F (-40 to 70°C), 10-95% relative humidity, non-condensing The TV-CLB-E2 is suitable for installation inside or outside the building envelope. It should be placed in a UL Listed enclosure. If installed outside, the enclosure must be suitable for the environmental conditions.
Compliance	United States of America: FCC compliant to Title CFR47, Chapter 1, Subchapter A, Part 15, Subpart B, Class A; UL Listed to UL 916, PAZX, Energy Management Equipment; Canada: Industry Canada Compliant, ICES-003, Class A cUL Listed UL 916, PAZX7, Energy Management Equipment; Europe: Mark, UK: EN50491-5-2:2009; Part 5-2: EMC requirements for HBES/BACS used in residential, commercial and light industry environment RoHS Compliant: 2015/863/EU REACH Compliant; Australia and New Zealand: C-Tick Mark, AS/NZS 61000-6-3
Physical	Fire-retardant plastic ABS, UL94-5VA
Mounting	35mm DIN rail mounting or screw mounting
Dimensions	<p>Overall</p> <p>A: 5.51 in. (14 cm)</p> <p>D: 5.88 in. (14.93 cm)</p> <p>E: 4.41 in. (11.20 cm)</p> <p>Depth: 2.01 in. (5.11 cm)</p> <p>Weight: .75 lbs. (.3402 kg)</p> <p>Mounting</p> <p>B: 3.00 in. (7.62 cm)</p> <p>C: 5.29 in. (13.44 cm)</p>

