




i-Vu[®] Building Automation System

TruVu[™] 022 Advanced Application Controller

Part Number: TV-022-E2

TruVu[™]

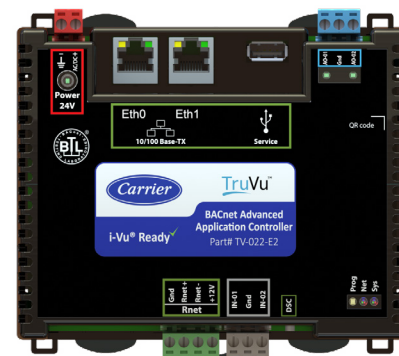

The TruVu 022 Advanced Application Controller is ideal for HVAC equipment control, advanced air quality control and most zone-level applications. The TV-022-E2 features dual Ethernet ports with built-in fail-safe that supports direct connection or daisy chain topologies using BACnet/IP and has 2 universal inputs and 2 analog outputs of on board control. Designed to operate in a wide range of environmental conditions, it is well suited for mechanical rooms, equipment boxes, or almost any other weather-tight location.



Application Features

- Versatile controller suitable for a variety of applications, including: pump control, unit heaters and exhaust fans
- Standard library of control programs available for most unitary equipment and zone applications
- Supports Carrier communicating sensors, which are available in a variety of zone and equipment sensing combinations
- Supports Carrier TruVu touchscreen interfaces for managing and troubleshooting the connected equipment easily and for occupant engagement
- Supports live, visual displays of control logic, which uses real time operational data and aids in optimizing and troubleshooting system operations
- Supports SNAP graphical programs to create custom sequences

Hardware Features

- Dual 10/100 Mbps IP ports
- Supports home run, daisy chain and ring IP network topologies
- Capacitor-backed real-time clock keeps time in the event of power failure or network interruption for at least three days
- USB service port for local access: connect PC via a hard-wired connection or wirelessly using a USB-W adapter
- DIN rail or screw mounting

System Benefits

- Connects seamlessly to the i-Vu building automation system





Specifications

BACnet Support	Conforms to the BACnet Building Controller (B-BC) and BACnet Broadcast Management Device (B-BBMD) Standard Device Profiles as defined in ANSI/ASHRAE Standard 135-2016 (BACnet) Annex L, Protocol Revision 15
Power Requirements	24 Vac \pm 15%, 50-60 Hz, 50 VA 24 Vdc \pm 10%, 18 W
Max # of Control Programs	2
Communication Ports	<p>Eth0,Eth1: 10/100 BaseT, full duplex, Ethernet ports with built-in fail safe. Supports direct connection or daisy chain topology natively using BACnet/IP and/or BACnet Ethernet communication.</p> <p>Rnet Port: Supports up to 10 ZS sensors, and one EQT1 or TruVu[™] EQT3 Equipment Touch. Supplies 12Vdc/260 mA power to the Rnet across its rated temperature range.</p> <p>Service Port: USB 2.0 host port for setting up the controller and troubleshooting through a local connection to a computer, connecting to the TruVu[™] interface, or the Carrier wireless service adapter.</p>
Inputs	<p>2 universal inputs electronically configurable in the control program for 0-5 Vdc, 0-10 Vdc, thermistor, dry contact or pulse counter.</p> <p>Resolution: 12 bit A/D</p> <p>Input Pulse Frequency: 10 pulses per second. Minimum pulse width (on or off time) required for each pulse is 50 msec.</p>
Outputs	<p>2 analog outputs, 0-10 Vdc (10 mA max), PWM @ 80 HZ</p> <p>Resolution 12 bit D/A</p>
Real Time Clock	Real-time clock keeps track of time in the event of a power failure for up to 3 days.
LED Status Indicators	Tricolor NET LED to show network status / Tricolor SYS LED to show controller status/ POWER LED A TX (Transmit) and RX (Receive) activity LED and yellow link status LED for the following ports: Ethernet port Eth0 and Ethernet port Eth1/Output LEDs indicate status for each output/ Prog LED is customizable
Environmental Operating Range	-40 to 158°F (-40 to 70°C), 10-95% relative humidity, non-condensing The TV-022-E2 is suitable for installation inside or outside the building envelope. It should be placed in a UL Listed enclosure. If installed outside, the enclosure must be suitable for the environmental conditions.
Compliance	United States of America: FCC CFR, Part 15, Class A; Canada: Industry Canada Compliant, ICES-003, Class A cUL Listed UL 916, PAZX7, Energy Management Equipment; Europe: Mark, UK: EN50491-5-2:2009; Part 5-2: EMC requirements for HBES/BACS used in residential, commercial and light industry environment RoHS Compliant: 2015/863/EU REACH Compliant
Plastic Rating	Fire-retardant plastic ABS, UL94-5VA
Mounting	35mm DIN rail mounting or screw mounting

Physical

Overall

A: 5.51 in. (14 cm)
D: 5.88 in. (14.93 cm)
E: 4.41 in. (11.20 cm)
Depth: 2.01 in. (5.11 cm)
Weight: .75 lbs. (.3402 kg)

Mounting

B: 3.00 in. (7.62 cm)
C: 5.29 in. (13.44 cm)

