WHY CHOOSE **TATTOO** CONDENSATE PUMPS

HMAX
QUALITY HVAC ACCESSORIES

Less Than 19 dB Near Silent

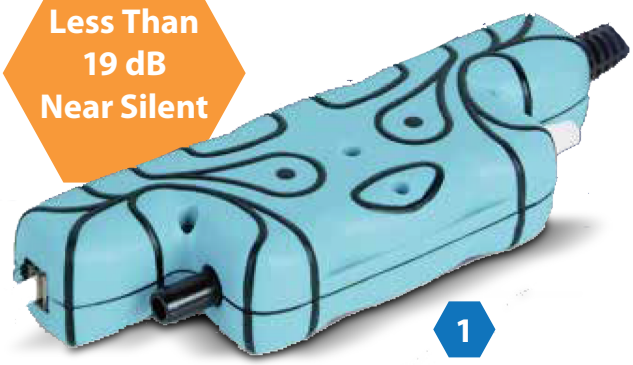

CONTENTS

1. TATTOO Pump Body
2. Plug & Play Detection Unit; 5′ Communication Wire Included
3. Connection Elbow
4. Ventilation Tube
5. Fixing Screws and Anchors
6. Double-sided Foam Adhesive





FEATURES & BENEFITS

- **Near silent** - Less than 19 dB noise rating with built-in rubber absorbers
- Pre-wired alarm contact
- Factory-installed check valve
- Normally open/normally closed alarm 100V to 240V/8A
- **Up to 25′ vertical lift**
- **Can be installed up to 5′** from detection unit in any position
- **Thermal security** of 230°F (110°C)
- **Rigid Swiss quality standards** - Engineered, manufactured and tested
- **For systems up to 54,000 BTU**

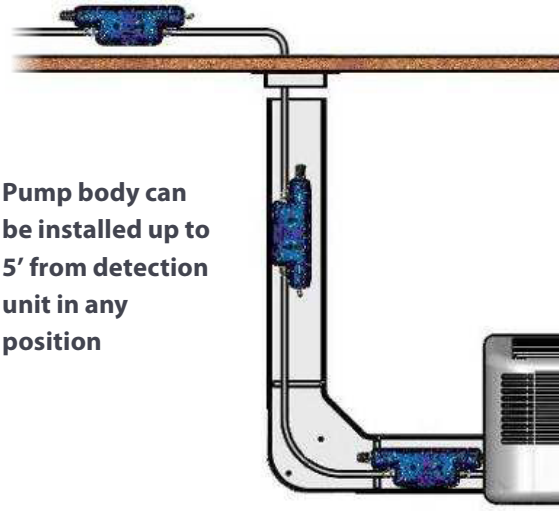

Pump body can be installed up to 5′ from detection unit in any position

QUICK REFERENCE GUIDE		
Part Number	**TATTOO16-120V**	**TATTOO16-230V**
Max Flow Rate	4.3 GAL/HR	4.3 GAL/HR
Flow Rate at 3′	3.8 GAL/HR	3.8 GAL/HR
Flow Rate at 10′	2.8 GAL/HR	2.8 GAL/HR
Max Dry Suction Height	3.3′	3.3′
Max Wet Suction Height	6.6′	6.6′
Max Delivery Height	29.5′	29.5′
Alarm Contact	NO/NC-120V / 8A	NO/NC-120V / 8A
Pump Dimensions (L/W/H)	5.9″ x 2.2″ x 1.1″	5.9″ x 2.2″ x 1.1″
Sensor Dimensions (L/W/H)	3.2″ x 1.6″ x 1.6″	3.2″ x 1.6″ x 1.6″
Weight	15.5 oz	15.5 oz
Power Supply	120V	230V
Noise Level	<19 dBA	<19 dBA



CONDENSATE PUMPS

Engineered, manufactured and tested according to rigid Swiss quality standards.

Product certifications available upon request.

SUBMITTAL DATA SHEET | CONDENSATE PUMPS			
Job Name	**Location**		
Purchaser	**Engineer**		
Submitted To	**Reference**	**Approval**	**Construction**
Submitted By	☐	☐	☐
Unit Designation	**Schedule**		
Construction	**Date**		

COMPONENTS

1. Electronic Board
2. Solenoid Pump
3. Discharge & Check-Valve
4. Suction

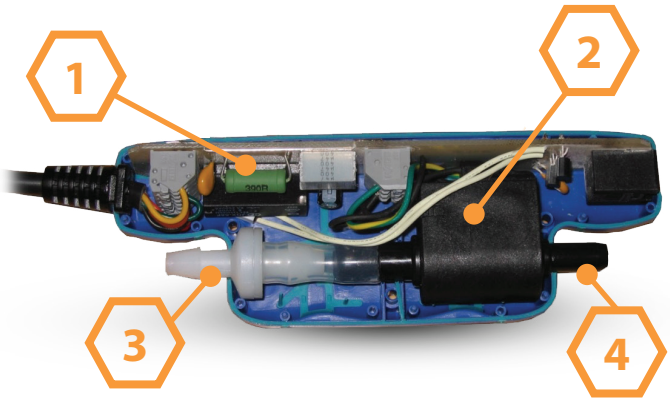

INSTALLATION OPTIONS

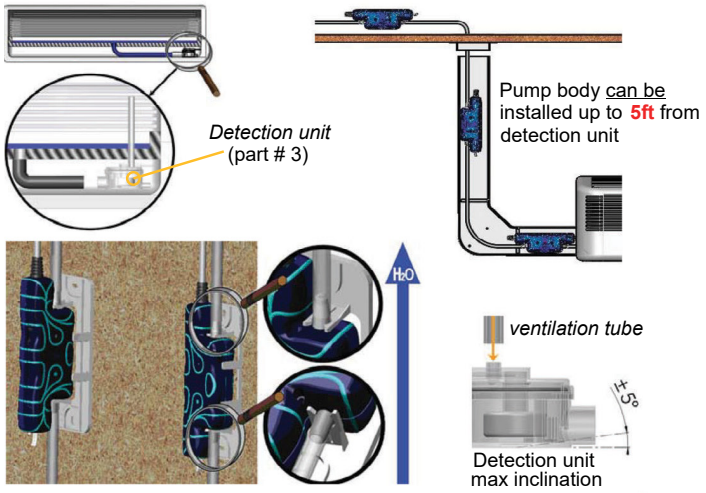

WIRING - RESIDENTIAL

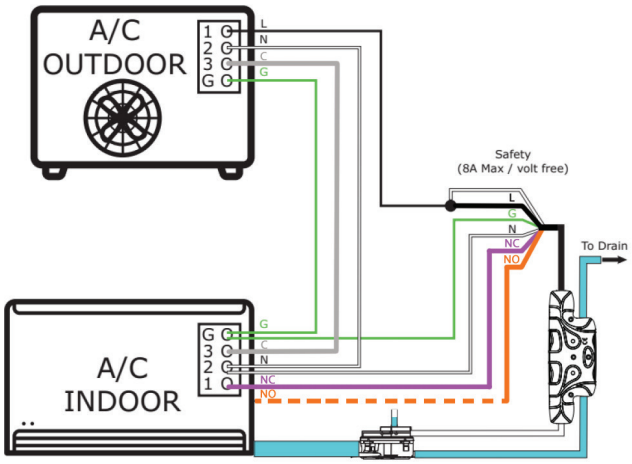

WIRING - COMMERCIAL

