
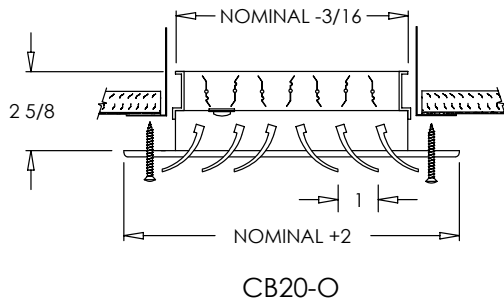
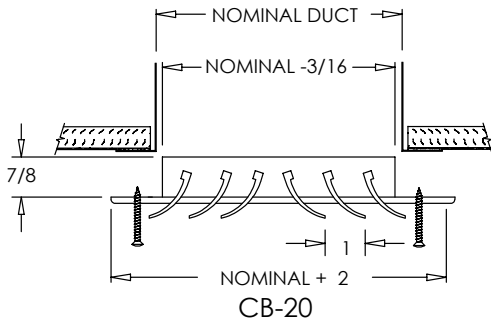


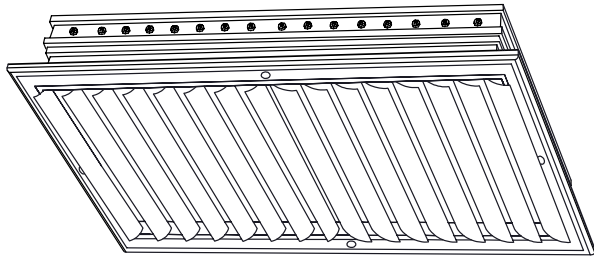

Standard Features:

- Adjustable aluminum curved blades
- Nylon bushings on adjustable blades prevent metal on metal rattle
- Extruded aluminum surface mount frame with signature line marks
- Designed for two-way air deflection
- Fractional and exact sizes available
- Countersunk mounting holes for flush appearance with color matching Philips posi-drive screws
- Rust resistant pre-coat with durable powder finish
- Soft White

Options:

Recessed screwdriver operated Opposed Blade Damper (CB20-0)
2" ADC compliant round collar with bead for ease of installation – available in square sizes only
MRI Compatible
T-20 Tamper Proof Screws

Air Patterns:

CB-20A	CB-20D
CB-20B	CB-20E
CB-20C	CB-20F

Finishes:

STANDARD COLORS


- ☐ Soft White
- ☐ Driftwood Tan
- ☐ Mill Finish

DESIGNER COLORS


- ☐ Black
- ☐ Bronze
- ☐ Storm Gray
- ☐ Cement Gray

- ☐ Aluminum Paint
- ☐ Coffee Tan
- ☐ Warm White
- ☐ Glossy White

CB20 Square Air Patterns:



CB20 Rectangle Air Patterns:

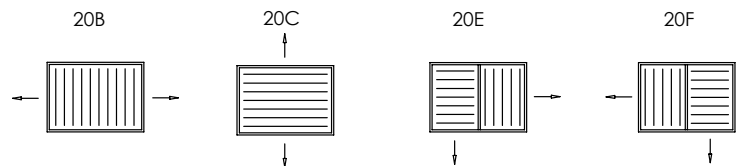

Additional Information:

Submittal Notes

Project / Location:

Engineer:

Architect:

Contractor: