
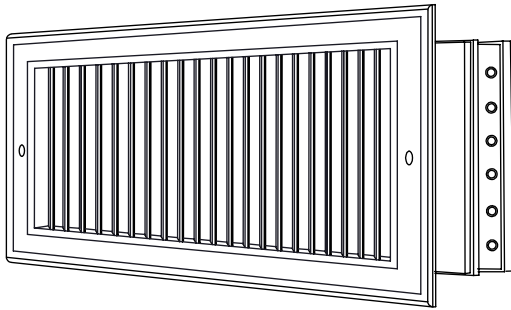


916

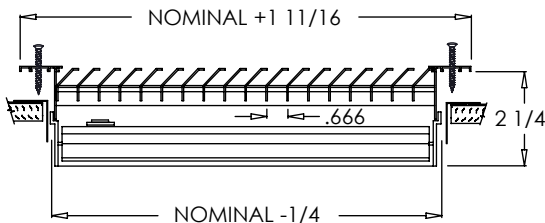

916-O

Standard Features:

- Extruded aluminum surface mount frame with signature line marks
- Extruded aluminum fixed bar blades at 45°
- Blades are parallel to shortest dimension
- Designed to minimize vision into air duct
- Center margins are mounted on the backside of the grille for a streamlined continuous look
- Countersunk mounting holes for flush appearance with color matching Phillips posi-drive screws
- Rust resistant pre-coat with durable powder finish
- Soft White

Options:

- ☐ Recessed screwdriver operated Opposed Blade Damper (916-0)
- ☐ Heavy duty construction
- ☐ MRI Compatible
- ☐ Insect Screen
- ☐ Fractional, exact I.D. and O.D. sizes
- ☐ Square to round 2" collar with roll formed retention bead – available in square sizes only
- ☐ T-20 Tamper Proof Screws

Finishes:

STANDARD COLORS

- ☐ Soft White
- ☐ Driftwood Tan
- ☐ Mill Finish

DESIGNER COLORS

- ☐ Black
- ☐ Bronze
- ☐ Storm Gray
- ☐ Cement Gray

- ☐ Aluminum Paint
- ☐ Coffee Tan
- ☐ Warm White
- ☐ Glossy White

Additional Information:

Project / Location:	
Engineer:	
Architect:	
Contractor:	

Submittal Notes