Job: _____

Location: _____

Submitted to: _____

Submittal Prepared by: _____

Approve Date: _____

Date: _____

Series 50

Rectangular CRD

Specifications

UL Classification:
UL Classified UL 555C - For use in non-combustible installations rated 3 hours or less.

Profile:
22Ga 1 Piece Rollformed Frame And Blades

Material:
Galvanized Steel

Fusible Link:
165° F Rated Link - Standard
212° F Rated Link - Optional

Fusible Link Type:
Easy Access Attachment (EA) - Standard
Standard Link Attachment (SL) - Optional

Sizes:
Available in Single-Section Sizes From 4" x 6" or 6" x 4" to 24" x 24"

Thermal Blanket:
Ceramic Thermal Blanket Provided On Units With CRD Blade Areas Of Greater Than 84 Sq. In.

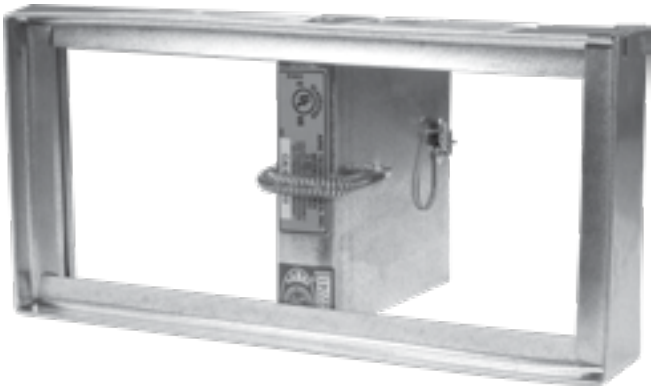



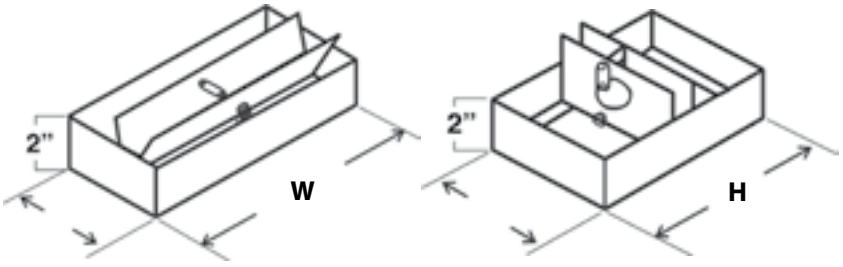

This product meets the requirements for ceiling dampers established by:

UL Standard 555C
NFPA Standard 90A
ICC Building Codes

3226-1650:0103

Part Number Format

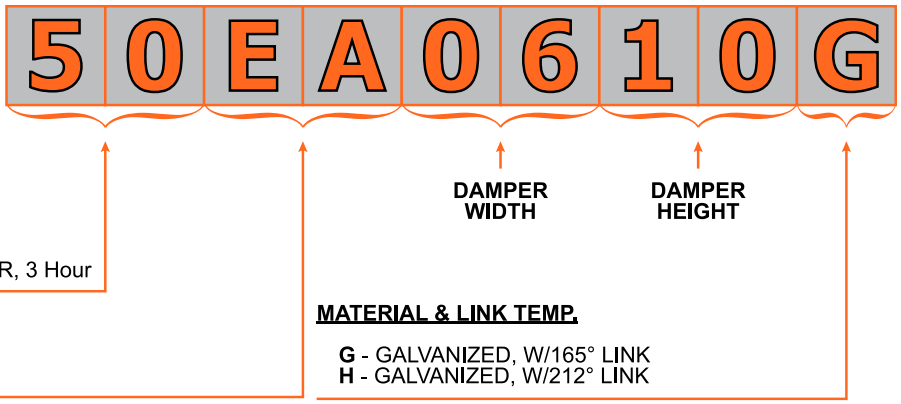

Qty.	Damper Size		Fusible Link Temp (165°F) std.
	W	H	