


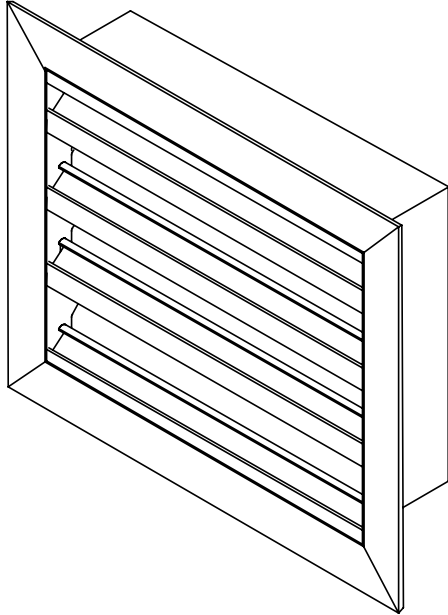

Standard Features:

- Extruded aluminum construction
- Standard flange frame
- 4" depth
- Louvers set at 45° on 4" centers
- Storm bend on louvers to prevent water from entering
- Water channel in side frame for drainage
- Water slots in bottom frame for drainage
- Bird screen (1/2" x 1/2")
- Blades run parallel to first dimension given
- Minimum size 6"x6"
- Maximum one piece size 96"x60"
- Driftwood Tan

Options:

- ☐ Flush mount channel frame (4525-CF)
- ☐ Offset flange frame, must specify flange placement (4525-OF)
- ☐ Insect Screen (1/16" x 1/16") (4525-IS)
- ☐ Removable bird screen (4525-RS)
- ☐ Fractional, exact I.D. and O.D. dimensions




Finishes:

STANDARD COLORS

- ☐ Soft White
- ☐ Driftwood Tan
- ☐ Mill Finish

DESIGNER COLORS

- ☐ Black
- ☐ Bronze
- ☐ Storm Gray
- ☐ Cement Gray
- ☐ Aluminum Paint
- ☐ Coffee Tan
- ☐ Warm White
- ☐ Glossy White

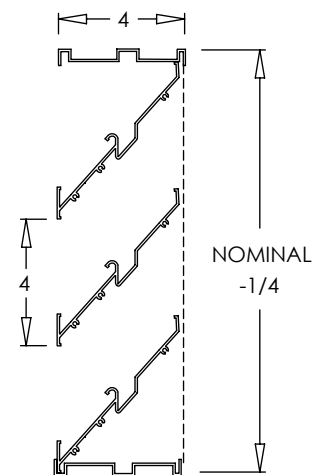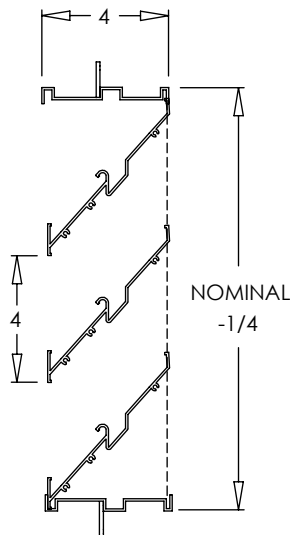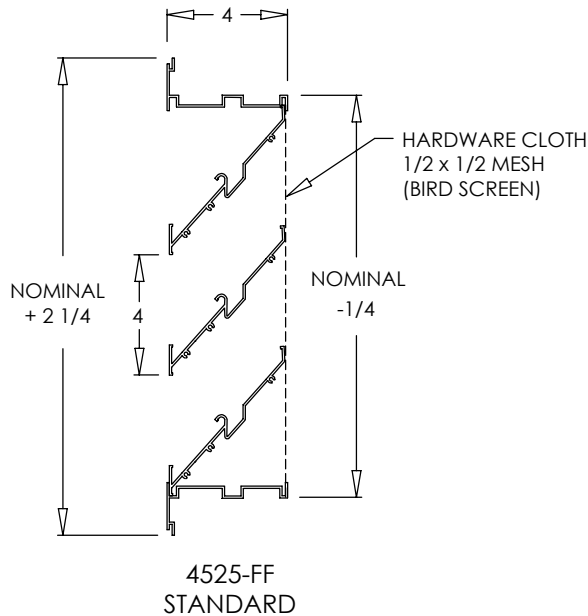

Additional Information:

Submittal Notes

Project / Location:

Engineer:

Architect:

Contractor: