


Fire Rated Submittal



Fire Rated Ceiling Access Door

MODEL: 6900 Series

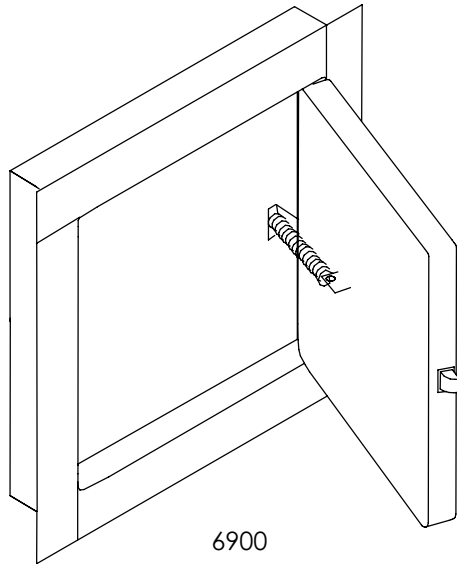

Standard Features:

- UL listed and tested with fire resistance rating for 1 1/2 hours
- Rated by Warnock Hersey for up to 3 hours in ceilings and up to 2 hours in walls*
- 20 gauge phosphate-treated steel door
- 16 gauge phosphate-treated steel frame
- Door has heavy duty spring closure for positive latching when panel door closes
- 2" insulation in door
- Exterior recessed latch is operated using a ring attached to the sliding bolt
- Interior latch release slide enables door to be opened from inside
- Continuous piano type hinge parallel to longest dimension
- White Prime Coat Finish

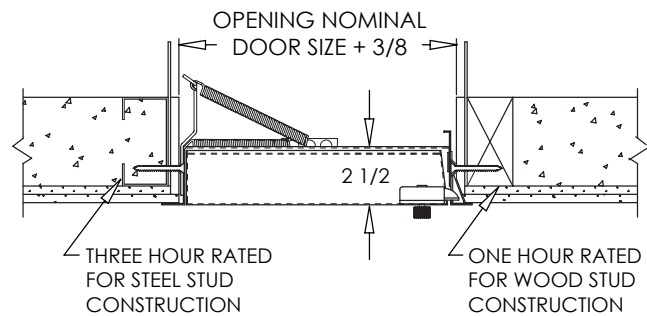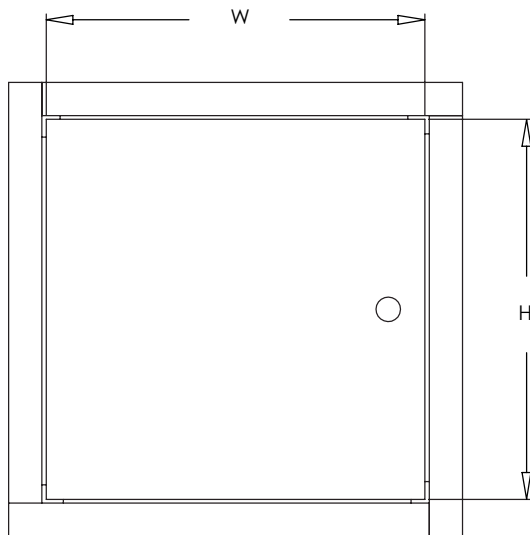

6900
CEILING OPENING

Product Notes:

*The hour rating depends both on materials used in construction and the mounting application, - i.e. ceiling versus wall mount.

Additional Information:

Submittal Notes

Project / Location:

Engineer:

Architect:

Contractor: