A/C Re~New Injector Tool

The A/C Re~New Injector was designed to inject A/C Re~New into air conditioning and refrigeration systems. It has a capacity of 4 fl. oz. and can be used for other injectable products as well, including amounts less than the 4 fl. oz. capacity. It is constructed of rugged aluminum and has a maximum working pressure of 600 psi. It has a Schrader fitting at one end and a short length of hose with a ball valve on the other end.



Part Number: 4057-99

Directions for Use

1

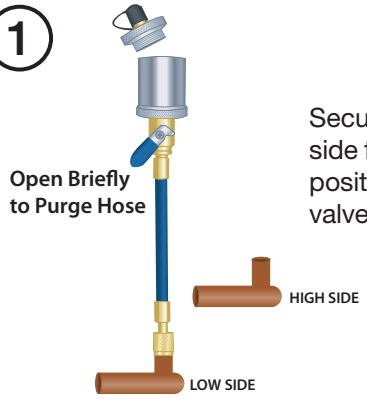

Secure hose-end to suction side fitting, with valve in closed position. Once attached, crack valve quickly to purge.

2

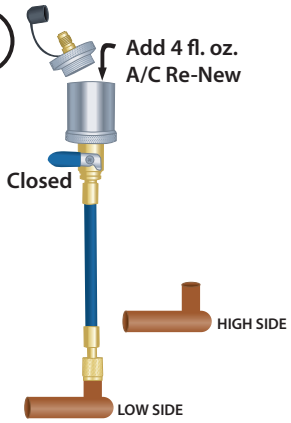

Add 4 fl. oz. to cylinder and the close cylinder lid to seal.

3

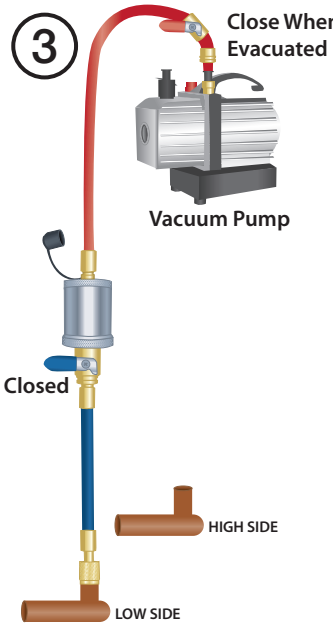

Installing A/C Re~New

a) Attach a vacuum pump to the other end, as shown, using another short hose with a shut-off valve. Draw vacuum on extra hose, then close its valve. Proceed to step 4.

b) As an alternative method without the vacuum pump, use a clean manifold hose set and proper service techniques to push the A/C Re-New into the low side with high side pressure. Be sure to purge or “burp” all lines.

4

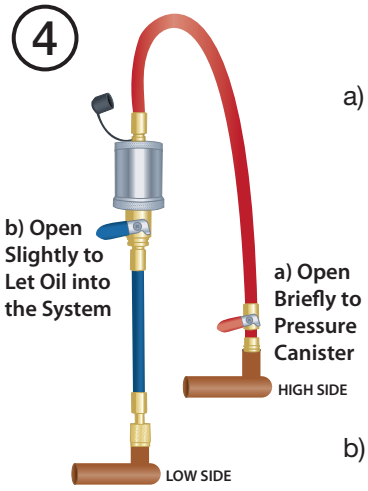

a) Attach to high side and then briefly open valve on second hose to pressurize the cylinder of product. **Close valve.**

b) Slightly open valve on cylinder to push product into system low side.

5 Once installed, close this valve and disconnect from low side fitting.

6 Close up cylinder to prevent any contamination from entering it.