




# 444B

## HVAC Line Set Tape

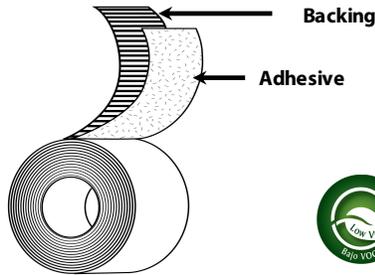

<b>Backing:</b>	OPP Film
<b>Adhesive:</b>	Acrylic
<b>Liner:</b>	N/A
<b>Colors:</b>	Black - Printed or Unprinted
<b>Specifications:</b>	N/A
<b>Standard Sizes:</b>	48mm x 55M

### Applications

- Wrapping and protecting foam insulation for pipes and line sets

### Features

### Benefits

• OPP Backing	• Tough and durable
• Acrylic Adhesive	• Hand tearable for ease of use
• Low VOC Content	• UV Resistant for outdoor installations*
	• Solvent-Free for reduced odor
	• Aggressive bond - won't flag or lift
	• Mold and moisture resistant
	• Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness</b>	3.0 mils	0.076 mm	ASTM D-1000
<b>Adhesion to Steel</b>	45 oz/in	4.92 N/cm	PSTC-101
<b>Adhesion to Backing</b>	35 oz/in	3.83 N/cm	PSTC-101
<b>Tensile Strength</b>	32 lb/in	56.04 N/cm	ASTM D-1000
<b>Operating Temperature</b>	-40 to 212 °F	-40 to 100 °C	
<b>VOC Content</b>	<1 g/L		

\*Not recommended for rooftop applications

Recommended Storage Conditions: 60-80 °F at 40-60% RH

Standard Shelf Life (at 25 °C): 24 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are typical values submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.