

**BA17NA
2-STAGE AIR-CONDITIONER
WITH PURON® REFRIGERANT
2 TO 5 TONS**



Product Data



NOTE: Ratings contained in this document are subject to change at any time. Always refer to the AHRI directory (www.ahridirectory.org) for the most up-to-date ratings information.

INDUSTRY LEADING FEATURES / BENEFITS

Efficiency

- Up to 17.0 SEER / Up to 13.0 EER
- Microtube Technology™ refrigeration system
- Indoor air quality accessories available

Comfort

- System supports Thermidistat™ or standard 2-stage thermostat controls

Reliability

- Non-ozone depleting Puron® refrigerant
- Front-seating service valves
- 2-stage scroll compressor
- Internal pressure relief valve
- Internal thermal overload
- Low pressure switch
- High pressure switch
- Filter drier
- Balanced refrigeration system for maximum reliability

Durability


DuraGuard Plus™ protection package:

- Solid, Durable sheet metal construction
- Dense wire coil guard
- Baked-on, complete outer coverage, powder paint

Applications

- Long-line - up to 250 feet (76.2 m) total equivalent length, up to 200 feet (60.96 m) condenser above evaporator, or up to 80 ft. (24.38 m) evaporator above condenser (See Longline Guide for more information.)
- Low ambient cooling (down to -10°F / -23°C) with approved low ambient accessory kits.

PRODUCT NUMBER NOMENCLATURE

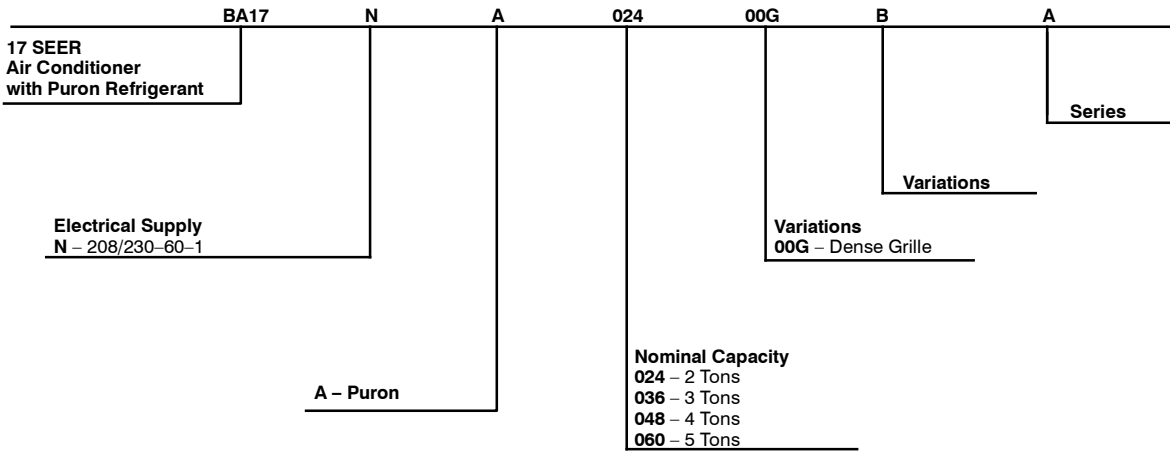

Use of the AHRI Certified TM Mark indicates a manufacturer's participation in the program. For verification of certification for individual products, go to www.ahridirectory.org.



ISO 9001
QMI-SAI Global



This product has been designed and manufactured to meet Energy Star® criteria for energy efficiency when matched with appropriate coil components. However, proper refrigerant charge and proper air flow are critical to achieve rated capacity and efficiency. Installation of this product should follow all manufacturing refrigerant charging and air flow instructions. **Failure to confirm proper charge and air flow may reduce energy efficiency and shorten equipment life.**

STANDARD FEATURES

FEATURES	Unit Size – Series			
	024 – B	036 – B	048 – B	060 – B
Puron Refrigerant	X	X	X	X
Maximum SEER Rating*	17.0	17.0	17.0	16.0
2 – Stage Scroll Compressor	X	X	X	X
Low Ambient Cooling Capability with Approved Kits	X	X	X	X
Field Installed Filter Drier	X	X	X	X
Front Seating Service Valves	X	X	X	X
Internal Pressure Relief Valve	X	X	X	X
Internal Thermal Overload	X	X	X	X
Long Line capability	X	X	X	X
Low Pressure Switch	X	X	X	X
High Pressure Switch	X	X	X	X
Crankcase Heater w/Temperature Switch	O	O	X	X

X = Standard O = Accessory

* With approved combinations

REFRIGERANT PIPING LENGTH LIMITATIONS

Liquid Line Sizing and Maximum Total Equivalent Lengths† for Cooling Only Systems with Puron® Refrigerant:

The maximum allowable length of a residential split system depends on the liquid line diameter and vertical separation between indoor and outdoor units.

See Table below for liquid line sizing and maximum lengths :

Maximum Total Equivalent Length Outdoor Unit BELOW Indoor Unit

Size	Liquid Line Connection	Liquid Line Diam. w/TXV	AC with Puron Refrigerant Maximum Total Equivalent Length†: Outdoor unit BELOW Indoor Vertical Separation ft (m)								
			0-5 (0-1.5)	6-10 (1.8-3.0)	11-20 (3.4-6.1)	21-30 (6.4-9.1)	31-40 (9.4-12.2)	41-50 (12.5-15.2)	51-60 (15.5-18.3)	61-70 (18.6-21.3)	71-80 (21.6-24.4)
024	3/8	1/4	75	75	75	50	50	--	--	--	--
		5/16	250*	250*	250*	250*	250*	225*	175	125	100
		3/8	250*	250*	250*	250*	250*	250*	250*	250*	250*
036	3/8	5/16	175	150	150	100	100	100	75	--	--
		3/8	250*	250*	250*	250*	250*	250*	250*	250*	250*
048	3/8	3/8	250*	250*	250*	250*	250*	250*	230	160	--
060	3/8	3/8	250*	250*	250*	225*	190	150	110	--	--

* Maximum actual length not to exceed 200 ft (61 m)

† Total equivalent length accounts for losses due to elbows or fitting. See the Long Line Guideline for details.

-- = outside acceptable range

Maximum Total Equivalent Length Outdoor Unit ABOVE Indoor Unit

Size	Liquid Line Connection	Liquid Line Diam. w/TXV	AC with Puron Refrigerant Maximum Total Equivalent Length†: Outdoor unit ABOVE Indoor Vertical Separation ft (m)							
			25 (7.6)	26-50 (7.9-15.2)	51-75 (15.5-22.9)	76-100 (23.2-30.5)	101-125 (30.8-38.1)	126-150 (38.4-45.7)	151-175 (46.0-53.3)	176-200 (53.6-61.0)
024	3/8	1/4	100	125	175	200	225*	250*	250*	250*
		5/16	250*	250*	250*	250*	250*	250*	250*	250*
		3/8	250*	250*	250*	250*	250*	250*	250*	250*
036	3/8	5/16	225*	250*	250*	250*	250*	250*	250*	250*
		3/8	250*	250*	250*	250*	250*	250*	250*	250*
048	3/8	3/8	250*	250*	250*	250*	250*	250*	250*	250*
060	3/8	3/8	250*	250*	250*	250*	250*	250*	250*	250*

* Maximum actual length not to exceed 200 ft (61 m)

† Total equivalent length accounts for losses due to elbows or fitting. See the Long Line Guideline for details.

REFRIGERANT CHARGE ADJUSTMENTS

Liquid Line Size	Puron Charge oz/ft (g/m)
3/8	0.60 (17.74) (Factory charge for lineset = 9 oz / 266.16 g)
5/16	0.40 (11.83)
1/4	0.27 (7.98)

Units are factory charged for 15 ft (4.6 m) of 3/8" liquid line. The factory charge for 3/8" lineset 9 oz.(266.16 g). When using other length or diameter liquid lines, charge adjustments are required per the chart above.

Charging Formula:

[(Lineset oz/ft x total length) – (factory charge for lineset)] = charge adjustment

Example 1: System has 15 ft of line set using existing 1/4" liquid line. What charge adjustment is required?

Formula: (.27 oz/ft x 15ft) – (9 oz) = (-4.95) oz.

Net result is to remove 4.95 oz of refrigerant from the system

Example 2: System has 45 ft of existing 5/16" liquid line. What is the charge adjustment?

Formula: (.40 oz/ft. x 45ft) – (9 oz.) = 9 oz.

Net result is to add 9 oz of refrigerant to the system

NOTE: Conditions must be favorable for charging by subcooling method. Indoor temperature must be 70°F to 80°F (21.1°C to 26.7°C), and outdoor temperature must be 70°F to 100°F (21.1°C to 37.8°C). If outside these conditions, adjust charge for long line sets by weigh-in method.

LONG LINE APPLICATIONS

An application is considered Long Line, when the refrigerant level in the system requires the use of accessories to maintain acceptable refrigerant management for systems reliability. See Accessory Usage Guideline table for required accessories. Defining a system as long line depends on the liquid line diameter, actual length of the tubing, and vertical separation between the indoor and outdoor units.

For Air Conditioner systems, the chart below shows when an application is considered Long Line.

AC with Puron Refrigerant Long Line Description ft (m) Beyond these lengths, a TXV is required

Total Length	Outdoor Unit Above or Below Indoor Unit
TXV required beyond 50 ft. (15.2 m)	TXV required beyond 20 ft. (6.1 m)

AC with Puron Refrigerant Long Line Description ft (m) (Beyond these lengths, long line accessories are required)

Liquid Line Size	Units On Same Level	Outdoor Below Indoor	Outdoor Above Indoor
1/4 + TXV	No accessories needed within allowed lengths	No accessories needed within allowed lengths	175 (53.3)
5/16 + TXV	120 (36.6)	50 (15.2) vertical or 120 (36.6) total	120 (36.6)
3/8 + TXV	80 (24.4)	35 (10.7) vertical or 80 (24.4) total	80 (24.4)

Note: See Residential Piping and Long Line Guideline for details

VAPOR LINE SIZING AND COOLING CAPACITY LOSS

Acceptable vapor line diameters provide adequate oil return to the compressor while avoiding excessive capacity loss. The suction line diameters shown in the chart below are acceptable for AC systems with Puron refrigerant:

Vapor Line Sizing and Cooling Capacity Losses — Puron Refrigerant 2-Stage Air Conditioner Applications

Unit Nominal Size (Btuh)	Maximum Liquid Line Diameters (In. OD)	Vapor Line Diameters (In.) OD	Cooling Capacity Loss (%) Total Equivalent Line Length ft. (m)								
			26–50 (7.9–15.2)	51–80 (15.5–24.4)	81–100 (24.7–30.5)	101–125 (30.8–38.1)	126–150 (38.4–45.7)	151–175 (46.0–50.3)	176–200 (53.6–60.0)	201–225 (61.3–68.6)	226–250 (68.9–76.2)
024	3/8	5/8	0	1	1	2	3	3	4	4	5
		3/4	0	0	0	0	1	1	1	1	1
036	3/8	5/8	1	2	4	5	6	7	9	10	11
		3/4	0	0	1	1	2	2	3	3	4
		7/8	0	0	0	0	1	1	1	1	2
048	3/8	3/4	1	2	2	3	4	5	6	7	7
		7/8	0	1	1	2	2	2	3	3	3
		1–1/8	0	0	—	—	—	—	—	—	—
060	3/8	3/4	1	2	4	5	6	7	9	10	11
		7/8	0	1	2	2	3	4	4	5	5
		1–1/8	0	0	0	1	1	1	1	1	1

Applications in this area may be long line and may have height restrictions. See the *Residential Piping and Long Line Guideline*.

— Applications in this area are not recommended due to insufficient oil return

PHYSICAL DATA

UNIT SIZE – VOLTAGE, SERIES	24 – B	36 – B	48 – B	60 – B
Compressor Type	Ultratech 2–Stage Scroll			
REFRIGERANT	Puron® (R–410A)			
Control	TXV (Puron® Hard Shutoff)			
Charge lb (kg)	6.64 (3.01)	9.26 (4.20)	12.94 (5.87)	12.70 (5.76)
COND FAN	Propeller Type, Direct Drive			
Air Discharge	Vertical			
Air Qty (CFM)	2481	3068	4700	4700
Motor HP	1/12	1/10	1/4	1/4
Motor RPM	800	825	825	825
COND COIL				
Face Area (Sq ft)	19.38	19.38	25.12	25.12
Fins per In.	25	25	20	20
Rows	1	1	2	2
Circuits	5	4	7	7
VALVE CONNECT. (In. ID)				
Vapor	3/4	7/8	1–1/8	1–1/8
Liquid	3/8	3/8	3/8	3/8
REFRIGERANT TUBES (In. OD)				
Rated Vapor*	3/4	7/8	1–1/8	1–1/8
Max Liquid Line †	3/8			

* Units are rated with 25 ft (7.6 m) of lineset length. See Vapor Line Sizing and Cooling Capacity Loss table when using other sizes and lengths of lineset.

Note: See unit Installation Instruction for proper installation.

† See *Liquid Line Sizing For Cooling Only Systems with Puron Refrigerant* tables.

ELECTRICAL DATA

UNIT SIZE – SERIES	V/PH	OPER VOLTS*		COMPR		FAN	MCA	MAX FUSE† or CKT BRK AMPS
		MAX	MIN	LRA	RLA	FLA		
024–B	208–230/1	253	197	58.3	11.10	0.60	14.5	20
036–B				83.0	15.30	0.70	19.8	35
048–B				104.0	21.20	1.30	27.8	40
060–B				152.9	28.80	1.30	37.3	60

* Permissible limits of the voltage range at which the unit will operate satisfactorily

† Time–Delay fuse.

FLA – Full Load Amps

LRA – Locked Rotor Amps

MCA – Minimum Circuit Amps

RLA – Rated Load Amps

NOTE: Control circuit is 24V on all units and requires external power source. Copper wire must be used from service disconnect to unit.

All motors/compressors contain internal overload protection.

Complies with 2010 requirements of ASHRAE Standards 90.1

A-WEIGHTED SOUND POWER LEVEL (dBA)

Unit Size	Standard Rating (dBA)	TYPICAL OCTAVE BAND SPECTRUM (dBA, without tone adjustment)						
		125	250	500	1000	2000	4000	8000
24–B	73 – High Stage	49.0	58.0	66.5	69.5	64.0	61.0	57.5
	74 – Low Stage	52.0	59.5	67.0	69.5	64.0	61.0	55.0
36–B	74 – High Stage	53.5	61.5	68.0	71.0	65.0	62.5	57.5
	74 – Low Stage	54.0	61.5	67.5	68.0	64.5	63.0	56.0
48–B	75 – High Stage	54.5	59.5	67.0	68.0	63.0	60.0	53.5
	74 – Low Stage	55.5	61.5	67.0	66.0	62.5	60.5	55.0
60–B	75 – High Stage	54.0	59.0	65.5	71.0	64.0	61.5	57.5
	74 – Low Stage	55.0	61.5	65.5	69.5	64.5	64.0	59.0

NOTE: Tested in accordance with AHRI Standard 270–95. (Not listed with AHRI).

A-WEIGHTED SOUND POWER LEVEL (dBA) WITH SOUND SHIELD

Unit Size	Standard Rating (dBA)	TYPICAL OCTAVE BAND SPECTRUM (dBA, without tone adjustment)						
		125	250	500	1000	2000	4000	8000
24–B	72 – High Stage	50.5	57.5	66.0	68.0	63.5	60.5	54.5
	73 – Low Stage	53.0	59.0	66.5	68.0	63.5	60.5	53.5
36–B	72 – High Stage	55.0	60.5	66.5	68.0	64.5	61.5	54.0
	72 – Low Stage	55.5	61.0	67.0	67.5	64.5	62.0	54.0
48–B	72 – High Stage	54.5	59.5	66.5	67.0	62.0	59.0	52.5
	71 – Low Stage	55.0	60.5	66.0	65.0	62.0	59.5	53.0
60–B	74 – High Stage	55.5	59.5	65.5	69.5	63.0	59.0	57.0
	72 – Low Stage	56.5	61.0	65.5	68.0	63.5	60.5	55.0

NOTE: Tested in accordance with AHRI Standard 270–95. (Not listed with AHRI).

CHARGING SUBCOOLING (TXV-TYPE EXPANSION DEVICE)

UNIT SIZE – VOLTAGE, SERIES	REQUIRED SUBCOOLING °F (°C)
24–B	10 (5.6)
36–B	14 (7.8)
48–B	13 (7.2)
60–B	14 (7.8)

THERMOSTATS

PART NUMBER	DESCRIPTION
T6 – WEM01	Housewise™ Wi-Fi® thermostat
T6 – PRH01 – A	Programmable Relative Humidity Thermostat
T6 – PAC01	Programmable Thermostat
T6 – NRH01	Non – Programmable Relative Humidity Thermostat
T6 – NAC01	Non – Programmable Thermostat
T2 – WHS01	Wi-Fi® Thermostat
T2 – PAC01	Programmable Thermostat
T2 – NAC01	Non – Programmable Thermostat
T2SNAC01	Non – Programmable Standard Screen Thermostat

THERMOSTAT ACCESSORIES		
PART NUMBER	DESCRIPTION	THERMOSTATS USED WITH
T6 – EXP	EXP® Card	T6 – Pxx, T6 – Nxx
TSTATXXSEN01 – B	Outdoor Air Temperature Sensor	T6 – Pxx, T6 – Nxx
TSTATXXCNV10	Thermostat Conversion Kit (4 to 5 wire) – 10 pack	All Bryant® branded thermostats

ACCESSORIES

ACCESSORY NUMBER	DESCRIPTION	Unit Size – Series	
		024 – B 036 – B	048 – B 060 – B
KAACH1701AAA	CRANKCASE HEATER	X	
KAALS0201LLS	SOLENOID VALVE	X	X
KAAWS0101AAA	WINTER START KIT	X	X
KSAFT0101AAA	FREEZE THERMOSTAT	X	X
KSAHS2501AAA	HARD START KIT	X	
KSAHS2801AAA	HARD START KIT		X
KSALA0301410	LOW AMBIENT KIT	X	X
KSASF0201AAA	SUPPORT FEET	X	X
KSASH2301COP	SOUND BLKT	X	
KSASH2401COP	SOUND BLKT		X

ACCESSORY USAGE GUIDELINE

Accessory	Required for Low Ambient Cooling Applications (Below 55° F / 12.8° C)	Required for Long Line Applications*	Required for Sea Coast Applications (within 2 miles/3.2 km)
Compressor Start Assist Capacitor and Relay	Yes	Yes	No
Crankcase Heater	Yes (standard on some units)	Yes (standard on some units)	No
Evaporator Freeze Thermostat	Yes	No	No
Hard Shutoff TXV	Yes (standard w/factory approved indoor unit)	Yes (standard w/factory approved indoor unit)	Yes (standard w/factory approved indoor unit)
Liquid Line Solenoid Valve	No	See Residential Piping and Long Line Guideline	No
Low-Ambient Pressure Switch	Yes	No	No
Support Feet	Recommended	No	Recommended
Winter Start Control	Yes	No	No

* For tubing line sets between 80 and 200 ft. (24.38 and 60.96 m) and/or 35 ft. (10.7 m) vertical differential, refer to Residential Piping and Longline Guideline.

Accessory Description and Usage (Listed Alphabetically)

1. Compressor Start Assist - Capacitor and Relay

Start capacitor and relay gives a "hard" boost to compressor motor at each start up.

Usage Guideline:

Required for 2-stage non-communicating units in the following applications:

- Long line
- Low ambient cooling

Suggested for all compressors in areas with a history of low voltage problems.

2. Crankcase Heater

An electric resistance heater which mounts to the base of the compressor to keep the lubricant warm during off cycles. Improves compressor lubrication on restart and minimizes the chance of liquid slugging.

Usage Guideline:

Required in long line applications.

Suggested in all commercial applications.

3. Evaporator Freeze Thermostat

An SPST temperature-actuated switch that stops unit operation when evaporator reaches freeze-up conditions.

Usage Guideline:

Required when low ambient kit has been added.

4. Low-Ambient Pressure Switch

A long life pressure switch which is mounted to outdoor unit service valve. It is designed to cycle the outdoor fan motor in order to maintain head pressure within normal operating limits. The control will maintain working head pressure at low-ambient temperatures down to -10°F / -23° when properly installed.

Usage Guideline:

A Low-Ambient Pressure Switch or MotorMaster® Low-Ambient Controller must be used when cooling operation is used at outdoor temperatures below 55°F (12.8°C).

5. Outdoor Air Temperature Sensor

Designed for use with Bryant Thermostats listed in this publication. This device enables the thermostat to display the outdoor temperature. This device also is required to enable special thermostat features such as auxiliary heat lock out.

Usage Guideline:

Suggested for all Bryant thermostats listed in this publication.

6. Support Feet

Four stick-on plastic feet that raise the unit 4 in. (101.6 mm) above the mounting pad. This allows sand, dirt, and other debris to be flushed from the unit base, minimizing corrosion.

Usage Guideline:

Suggested in the following applications:

Coastal installations.

Windy areas or where debris is normally circulating.

Rooftop installations.

For improved sound ratings.

7. Thermostatic Expansion Valve (TXV)

A modulating flow-control valve which meters refrigerant liquid flow rate into the evaporator in response to the superheat of the refrigerant gas leaving the evaporator.

Kit includes valve, adapter tubes, and external equalizer tube. Hard shut off types are available.

NOTE: When using a hard shut off TXV with single phase reciprocating compressors, a Compressor Start Assist Capacitor and Relay is required.

Usage Guideline:

Required to achieve AHRI ratings in certain equipment combinations. Refer to combination ratings.

Hard shut off TXV or LLS required in air conditioner long line applications.

Required for use on all zoning systems.

8. Time-Delay Relay

An SPST delay relay which briefly continues operation of indoor blower motor to provide additional cooling after the compressor cycles off.

NOTE: Most indoor unit controls include this feature. For those that do not, use the guideline below.

Usage Guideline:

For improved efficiency ratings for certain combinations of indoor and outdoor units. Refer to AHRI Unitary Directory.

DIMENSIONS



UNIT	SERIES	ELECTRICAL CHARACTERISTICS				A		B		C		D		E		F		G		H		I		J		K		OPERATING WEIGHT		SHIPPING WEIGHT		SHIPPING LENGTH / WIDTH (Sq.)		SHIPPING HEIGHT	
		INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	Lbs	Kgs	Lbs	Kgs	INCH	MM	INCH	MM
BA17NA02400GABAA	B	Y	N	N	N	31 3/16	792.5	35 1/16	890.7	3/4	19.1	6 9/16	166.1	24 11/16	626.3	9 1/8	231.3	5/16	7.9	3	76.2	16	406.4	15 1/2	383.7	16 1/8	409.6	167	75.7	184	83.5	32 3/16	817.9	36 11/16	931.3
BA17NA03600GABAA	B	Y	N	N	N	31 3/16	792.5	35 1/16	890.7	7/8	22.2	6 9/16	166.1	24 11/16	626.3	9 1/8	231.3	5/16	7.9	3	76.2	15 3/4	400.1	15 1/2	383.7	15	381.0	191	86.6	210	95.3	32 3/16	817.9	36 11/16	931.3
BA17NA04800GABAA	B	Y	N	N	N	35	889.0	38 7/8	987.8	7/8	22.2	6 9/16	166.1	28 7/16	722.8	9 1/8	231.3	5/16	7.9	3	76.2	18 1/2	469.9	16 1/2	419.1	17	431.8	253	114.8	278	126.1	36	914.9	40 9/16	1030.4
BA17NA06000GABAA	B	Y	N	N	N	35	889.0	38 7/8	987.8	7/8	22.2	6 9/16	166.1	28 7/16	722.8	9 1/8	231.3	5/16	7.9	3	76.2	17 3/4	450.9	16 1/2	419.1	17	431.8	258	117.0	284	128.8	36	914.9	40 9/16	1030.4

Y=YES
N=NO

208-230-1-60	460-3-60	575-3-60
--------------	----------	----------

NOTES:

1. CENTER OF GRAVITY

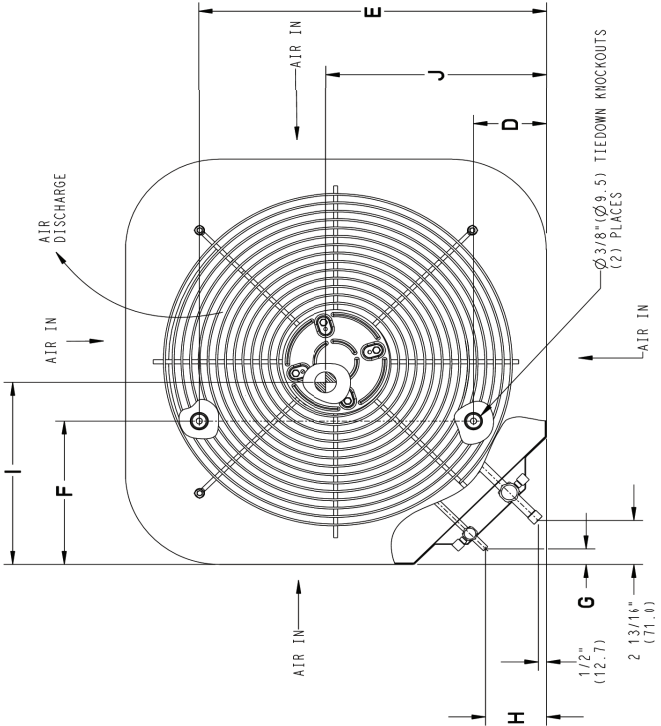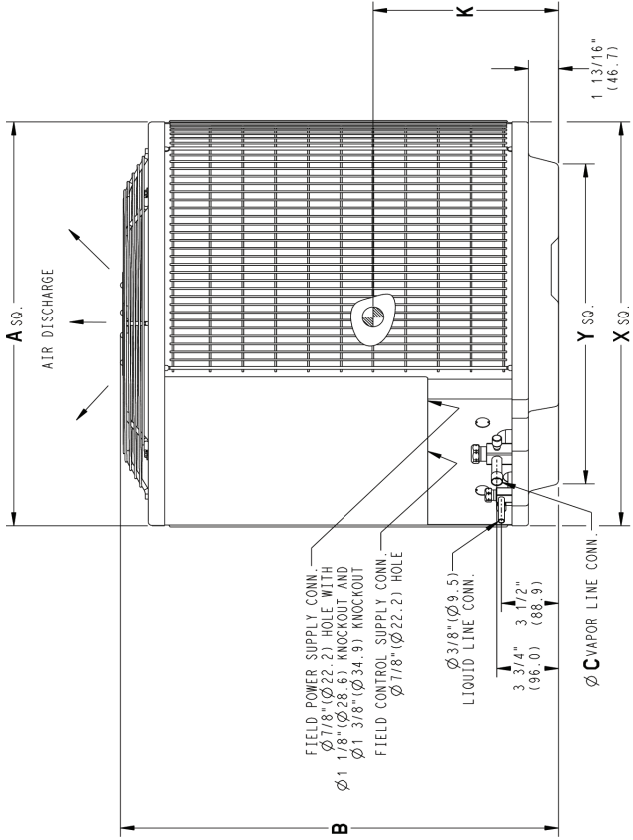


UNIT SIZE	"X"			"Y"		
	MINIMUM GROUND MOUNTING PAD APPLICATION DIMENSIONS			MINIMUM ROOF-TOP MOUNTING PAD APPLICATION DIMENSIONS		
-	23 1/8	587.3	17 7/8	454.6		
-	25 3/4	654.0	20 7/16	518.5		
24,36	31 3/16	792.5	22 15/16	583.2		
48,60	35	889.0	26 3/4	679.7		

NOTE: ALL DIMENSIONS IN INCH (MM)

U.S. ECCN: Not Subject to Regulation (N.S.R.)

CLEARANCES

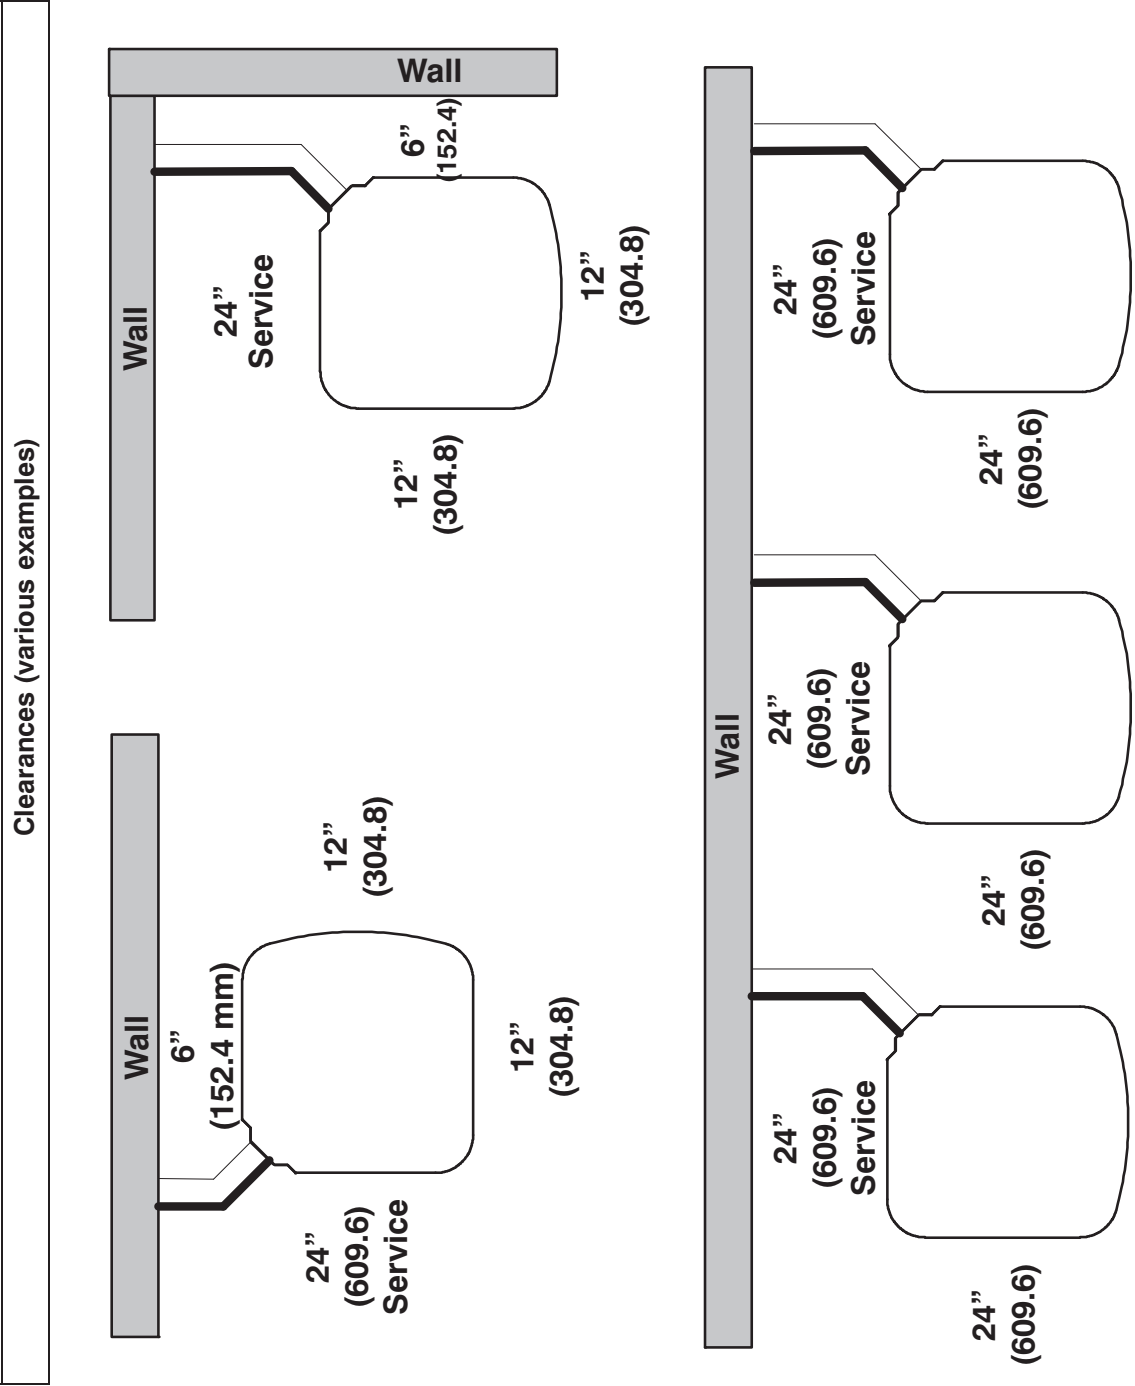

Note: Numbers in () = mm

IMPORTANT: When installing multiple units in an alcove, roof well, or partially enclosed area, ensure there is adequate ventilation to prevent re-circulation of discharge air.

TESTED AHRI COMBINATION RATINGS

NOTE: Ratings contained in this document are subject to change at any time.

For AHRI ratings certificates, please refer to the AHRI directory www.ahridirectory.org

Additional ratings and system combinations can be accessed via the Bryant database at: www.MyBryantRatings.com

For performance data at specific application &/or design conditions with various indoor unit combinations, the equipment performance calculator can be accessed at : <http://rpmobbry.wrightsoft.com/>

MODEL NUMBER	INDOOR MODEL	AHRI STANDARD RATINGS – COOLING					
		CAPACITY		EER	SEER	ID SCFM	
		HIGH	LOW			HIGH	LOW
BA17NA024–B	CNPV*3117AL*	25000	21200	12.2	14	800	680
BA17NA036–B	CAP**3721AL*	36800	30200	12.2	14	1050	840
BA17NA048–B	CAP**6124AL*	48500	40500	12.5	15	1400	1120
BA17NA060–B	CAP**6124AL*	56500	47000	12.0	14.5	1625	1300

AHRI — Air Conditioning, Heating & Refrigeration Institute

EER — Energy Efficiency Ratio — 80°F (26.6°C) indoor db/67°F (19.4°C) indoor wb & 95°F (35°C) outdoor wb.

SEER — Seasonal Energy Efficiency Ratio

NOTES:

1. Ratings are net values reflecting the effects of circulating fan motor heat. Supplemental electric heat is not included.
2. Tested outdoor/indoor combinations have been tested in accordance with DOE test procedures for central air conditioners. Ratings for other combinations are determined under DOE computer simulation procedures.
3. Determine actual CFM values obtainable for your system by referring to fan performance data in fan coil or furnace coil literature.
4. Do not apply with capillary tube coils as performance and reliability are affected.

DETAILED COOLING CAPACITIES#

EVAPORATOR AIR				CONDENSER ENTERING AIR TEMPERATURES °F (°C)															
CFM	EWB °F (°C)	75 (23.9)		85 (29.4)		95 (35)		105 (40.6)		115 (46.1)		125 (51.7)							
		Capacity MBTuh Total	Sens†	Total System KW**	Capacity MBTuh Total	Sens†	Total System KW**	Capacity MBTuh Total	Sens†	Total System KW**	Capacity MBTuh Total	Sens†	Total System KW**	Capacity MBTuh Total	Sens†	Total System KW**			
600	57 (13.9)	22.30	22.30	1.61	21.56	21.56	1.77	20.75	20.75	1.95	19.87	19.87	2.16	18.91	18.91	2.41	17.90	17.90	2.71
	62 (16.7)	23.76	20.20	1.62	22.78	19.73	1.78	21.72	19.22	1.96	20.59	18.68	2.17	19.38	18.12	2.41	18.12	17.52	2.71
	63 (17.2)††	24.22	16.66	1.62	23.22	16.19	1.78	22.14	15.68	1.96	20.97	15.15	2.17	19.73	14.58	2.42	18.41	14.00	2.71
	67 (19.4)	26.19	17.29	1.63	25.11	16.81	1.79	23.94	16.31	1.97	22.69	15.77	2.18	21.36	15.21	2.43	19.98	14.64	2.72
	72 (22.2)	28.90	14.31	1.65	27.71	13.84	1.80	26.43	13.33	1.98	25.06	12.81	2.19	23.62	12.26	2.44	22.10	11.69	2.74
650	57 (13.9)	22.98	22.98	1.63	22.20	22.20	1.79	21.35	21.35	1.97	20.42	20.42	2.18	19.43	19.43	2.43	18.37	18.37	2.73
	62 (16.7)	24.16	21.11	1.64	23.17	20.63	1.80	22.08	20.11	1.98	20.90	19.56	2.19	19.68	18.98	2.43	18.79	17.66	2.73
	63 (17.2)††	24.61	17.28	1.64	23.58	16.80	1.80	22.46	16.28	1.98	21.26	15.74	2.19	19.98	15.17	2.44	18.63	14.57	2.73
	67 (19.4)	26.60	17.94	1.66	25.48	17.46	1.81	24.27	16.95	1.99	22.99	16.40	2.20	21.62	15.84	2.45	20.20	15.25	2.74
	72 (22.2)	29.33	14.74	1.67	28.10	14.25	1.82	26.78	13.72	2.00	25.37	13.19	2.21	23.88	12.64	2.46	22.32	12.07	2.76
700	57 (13.9)	23.59	23.59	1.66	22.78	22.78	1.81	21.89	21.89	1.99	20.92	20.92	2.21	19.89	19.89	2.46	18.79	18.79	2.75
	62 (16.7)	24.52	22.00	1.66	23.50	21.51	1.82	22.38	20.98	2.00	21.19	20.42	2.21	20.37	19.03	2.46	18.82	18.82	2.75
	63 (17.2)††	24.95	17.87	1.66	23.88	17.38	1.82	22.73	16.86	2.00	21.50	16.31	2.21	20.19	15.74	2.46	18.82	15.14	2.75
	67 (19.4)	26.95	18.58	1.68	25.79	18.09	1.83	24.56	17.57	2.01	23.24	17.02	2.22	21.84	16.45	2.47	20.38	15.86	2.76
	72 (22.2)	29.70	15.12	1.69	28.43	14.63	1.84	27.08	14.12	2.02	25.63	13.57	2.23	24.11	13.01	2.48	22.51	12.43	2.78
750	57 (13.9)	24.15	24.15	1.68	23.31	23.31	1.84	22.38	22.38	2.02	21.38	21.38	2.23	20.30	20.30	2.48	19.16	19.16	2.78
	62 (16.7)	24.84	22.86	1.68	23.79	22.36	1.84	22.66	21.82	2.02	21.47	21.22	2.23	20.34	20.34	2.48	19.20	19.20	2.78
	63 (17.2)††	25.24	18.45	1.69	24.14	17.96	1.84	22.96	17.43	2.02	21.70	16.88	2.23	20.37	16.29	2.48	18.97	15.69	2.77
	67 (19.4)	27.24	19.20	1.70	26.06	18.71	1.85	24.80	18.18	2.03	23.45	17.63	2.24	22.02	17.05	2.49	20.53	16.45	2.78
	72 (22.2)	30.01	15.50	1.71	28.71	15.01	1.86	27.32	14.48	2.04	25.84	13.94	2.25	24.29	13.37	2.50	22.66	12.78	2.80
800	57 (13.9)	24.66	24.66	1.70	23.78	23.78	1.86	22.82	22.82	2.04	21.79	21.79	2.25	20.68	20.68	2.50	19.50	19.50	2.80
	62 (16.7)	25.13	23.70	1.70	24.06	23.19	1.86	22.94	22.61	2.04	22.00	21.45	2.25	20.71	20.71	2.50	19.53	19.53	2.80
	63 (17.2)††	25.49	19.02	1.71	24.37	18.52	1.86	23.16	17.99	2.04	21.88	17.42	2.25	20.52	16.84	2.50	19.11	16.23	2.79
	67 (19.4)	27.50	19.81	1.72	26.30	19.32	1.87	25.00	18.78	2.05	23.62	18.22	2.26	22.18	17.64	2.51	20.66	17.03	2.80
	72 (22.2)	30.28	15.87	1.73	28.94	15.37	1.88	27.52	14.84	2.06	26.02	14.29	2.27	24.44	13.72	2.52	22.79	13.13	2.82
835	57 (13.9)	24.99	24.99	1.72	24.09	24.09	1.87	23.10	23.10	2.05	22.05	22.05	2.26	20.92	20.92	2.51	19.72	19.72	2.81
	62 (16.7)	25.34	24.28	1.72	24.26	23.74	1.87	23.33	22.74	2.05	22.08	22.08	2.26	20.95	20.95	2.51	19.75	19.75	2.81
	63 (17.2)††	25.64	19.41	1.72	24.51	18.91	1.87	23.28	18.37	2.05	21.99	17.81	2.26	20.61	17.21	2.51	19.18	16.80	2.81
	67 (19.4)	27.66	20.24	1.73	26.44	19.73	1.88	25.12	19.20	2.06	23.74	18.63	2.27	22.27	18.05	2.52	20.74	17.43	2.82
	72 (22.2)	30.44	16.12	1.75	29.09	15.62	1.90	27.65	15.09	2.08	26.13	14.53	2.29	24.53	13.96	2.54	22.86	13.36	2.83
900	57 (13.9)	25.55	25.55	1.74	24.61	24.61	1.90	23.59	23.59	2.08	22.49	22.49	2.29	21.32	21.32	2.54	20.08	20.08	2.84
	62 (16.7)	25.69	25.27	1.74	24.84	24.22	1.90	23.62	23.62	2.08	22.52	22.52	2.29	21.35	21.35	2.54	20.11	20.11	2.84
	63 (17.2)††	25.89	20.12	1.75	24.73	19.62	1.90	23.48	19.07	2.08	22.16	18.50	2.29	20.77	17.89	2.54	19.31	17.27	2.83
	67 (19.4)	27.92	21.00	1.76	26.66	20.49	1.91	25.33	19.95	2.09	23.91	19.38	2.30	22.42	18.79	2.55	20.87	18.17	2.84
	72 (22.2)	30.70	16.57	1.77	29.32	16.07	1.92	27.85	15.53	2.10	26.30	14.98	2.31	24.67	14.40	2.56	22.98	13.80	2.86

See notes on page 15

DETAILED COOLING CAPACITIES# (CONTINUED)

EVAPORATOR AIR			CONDENSER ENTERING AIR TEMPERATURES °F (°C)																				
CFM	EWB ° F (° C)	75 (23.9)		85 (29.4)				95 (35)				105 (40.6)				115 (46.1)				125 (51.7)			
		Capacity MBtuh	Total Sys. KW**	Capacity MBtuh	Total Sys. KW**	Capacity MBtuh	Total Sys. KW**	Capacity MBtuh	Total Sys. KW**	Capacity MBtuh	Total Sys. KW**	Capacity MBtuh	Total Sys. KW**	Capacity MBtuh	Total Sys. KW**	Capacity MBtuh	Total Sys. KW**						
BA17NA024-B Outdoor Section With CNPV*3117AL* Indoor Section - Low																							
450	57 (13.9)	17.13	17.13	1.15	1.15	15.55	15.55	13.98	13.98	1.46	1.46	12.43	12.43	10.95	10.95	1.86	1.86	9.54	9.54	2.10	2.10		
	62 (16.7)	18.23	15.64	1.14	1.14	16.39	14.37	13.11	14.57	1.45	1.45	12.79	11.88	11.11	10.69	1.86	1.86	9.59	9.52	2.10	2.10		
	63 (17.2)††	18.60	12.88	1.13	1.28	16.73	11.77	12.86	14.86	1.45	1.45	13.04	9.59	11.32	8.56	1.86	1.86	9.71	7.58	2.10	2.10		
	67 (19.4)	20.17	13.39	1.12	1.26	18.14	12.24	11.11	16.13	1.43	1.43	14.18	10.01	12.33	8.96	1.85	1.85	10.59	7.97	2.10	2.10		
	72 (22.2)	22.34	11.09	1.09	1.24	20.09	10.07	9.07	17.89	1.41	1.41	15.75	8.11	13.73	7.20	1.84	1.84	11.82	6.34	2.09	2.09		
500	57 (13.9)	17.84	17.84	1.16	1.16	16.18	16.18	14.53	14.53	1.47	1.47	12.91	12.91	11.36	11.36	1.87	1.87	9.89	9.89	2.12	2.12		
	62 (16.7)	18.65	16.61	1.15	1.15	16.76	15.27	13.95	14.88	1.47	1.47	13.06	12.65	11.37	11.37	1.87	1.87	9.91	9.91	2.12	2.12		
	63 (17.2)††	19.01	13.53	1.15	1.29	17.08	12.37	12.89	15.15	1.46	1.46	13.29	10.10	11.52	9.03	1.87	1.87	9.86	8.02	2.12	2.12		
	67 (19.4)	20.60	14.09	1.13	1.28	18.50	12.89	11.72	16.43	1.45	1.45	14.43	10.57	12.54	9.47	1.86	1.86	10.75	8.44	2.11	2.11		
	72 (22.2)	22.79	11.53	1.11	1.26	20.48	10.47	9.44	18.21	1.43	1.43	16.01	8.45	13.93	7.51	1.85	1.85	11.99	6.62	2.11	2.11		
550	57 (13.9)	18.47	18.47	1.17	1.17	16.74	16.74	15.01	15.01	1.48	1.48	13.33	13.33	11.71	11.71	1.89	1.89	10.19	10.19	2.13	2.13		
	62 (16.7)	19.01	17.55	1.16	1.31	17.07	16.15	14.76	15.15	1.48	1.48	13.49	13.09	11.73	11.73	1.89	1.89	10.20	10.20	2.13	2.13		
	63 (17.2)††	19.35	14.16	1.16	1.31	17.35	12.96	13.11	15.38	1.48	1.48	13.48	10.61	11.67	9.50	1.89	1.89	9.98	8.45	2.13	2.13		
	67 (19.4)	20.95	14.76	1.14	1.29	18.79	13.52	12.30	16.67	1.46	1.46	14.63	11.12	12.69	9.98	1.88	1.88	10.88	8.90	2.13	2.13		
	72 (22.2)	23.16	11.94	1.12	1.27	20.78	10.86	9.79	18.46	1.44	1.44	16.21	8.79	14.09	7.81	1.87	1.87	12.11	6.90	2.13	2.13		
600	57 (13.9)	19.02	19.02	1.18	1.18	17.22	17.22	15.43	15.43	1.50	1.50	13.69	13.69	12.02	12.02	1.90	1.90	10.45	10.45	2.15	2.15		
	62 (16.7)	19.33	18.46	1.18	1.33	17.35	16.99	15.14	15.62	1.49	1.49	13.71	13.71	12.04	12.04	1.90	1.90	10.46	10.46	2.15	2.15		
	63 (17.2)††	19.62	14.78	1.18	1.32	17.58	13.53	13.32	15.57	1.49	1.49	13.63	11.10	11.79	9.96	1.91	1.91	10.08	8.87	2.15	2.15		
	67 (19.4)	21.24	15.42	1.16	1.31	19.03	14.14	12.87	16.87	1.48	1.48	14.79	11.65	12.82	10.47	1.90	1.90	10.98	9.35	2.15	2.15		
	72 (22.2)	23.46	12.34	1.14	1.29	21.03	11.23	10.15	18.65	1.46	1.46	16.37	9.11	14.22	8.11	1.89	1.89	12.20	7.17	2.14	2.14		
650	57 (13.9)	19.52	19.52	1.19	1.19	17.65	17.65	15.81	15.81	1.51	1.51	14.01	14.01	12.29	12.29	1.92	1.92	10.67	10.67	2.17	2.17		
	62 (16.7)	19.91	18.83	1.19	1.34	17.81	17.43	15.83	15.83	1.51	1.51	14.03	14.03	12.31	12.31	1.92	1.92	10.69	10.69	2.17	2.17		
	63 (17.2)††	19.85	15.37	1.19	1.34	17.77	14.09	13.42	15.73	1.51	1.51	13.76	11.58	11.91	10.40	1.92	1.92	10.16	9.27	2.17	2.17		
	67 (19.4)	21.47	16.07	1.17	1.32	19.23	14.73	13.43	16.92	1.49	1.49	14.92	12.17	12.93	10.95	1.91	1.91	11.07	9.79	2.17	2.17		
	72 (22.2)	23.70	12.73	1.15	1.30	21.23	11.60	10.49	18.81	1.47	1.47	16.50	9.42	14.31	8.40	1.90	1.90	12.27	7.44	2.16	2.16		
680	57 (13.9)	19.78	19.78	1.20	1.20	17.89	17.89	16.01	16.01	1.52	1.52	14.18	14.18	12.44	12.44	1.93	1.93	10.79	10.79	2.18	2.18		
	62 (16.7)	20.10	19.26	1.20	1.35	17.92	17.92	16.04	16.04	1.52	1.52	14.21	14.21	12.46	12.46	1.93	1.93	10.81	10.81	2.18	2.18		
	63 (17.2)††	19.97	15.73	1.20	1.35	17.87	14.42	13.12	15.81	1.52	1.52	13.82	11.87	11.95	10.66	1.94	1.94	10.21	9.51	2.18	2.18		
	67 (19.4)	21.59	16.45	1.18	1.33	19.33	15.10	13.77	17.11	1.50	1.50	14.99	12.48	12.98	11.24	1.93	1.93	11.11	10.05	2.18	2.18		
	72 (22.2)	23.83	12.96	1.16	1.31	21.33	11.81	10.68	18.89	1.48	1.48	16.56	9.60	14.36	8.57	1.91	1.91	12.31	7.59	2.17	2.17		
700	57 (13.9)	19.96	19.96	1.21	1.21	18.04	18.04	16.14	16.14	1.52	1.52	14.29	14.29	12.53	12.53	1.94	1.94	10.87	10.87	2.19	2.19		
	62 (16.7)	20.20	19.56	1.20	1.35	18.07	18.07	16.16	16.16	1.52	1.52	14.32	14.32	12.55	12.55	1.94	1.94	10.89	10.89	2.19	2.19		
	63 (17.2)††	20.04	15.96	1.21	1.36	17.93	14.63	13.33	15.86	1.53	1.53	13.87	12.05	11.99	10.83	1.94	1.94	10.24	9.67	2.19	2.19		
	67 (19.4)	21.67	16.70	1.19	1.34	19.39	15.33	13.99	17.16	1.51	1.51	15.03	12.68	13.01	11.43	1.93	1.93	11.14	10.22	2.18	2.18		
	72 (22.2)	23.90	13.11	1.17	1.32	21.39	11.95	10.81	18.94	1.49	1.49	16.60	9.72	14.39	8.68	1.92	1.92	12.33	7.70	2.18	2.18		

See notes on page 15

DETAILED COOLING CAPACITIES# (CONTINUED)

EVAPORATOR AIR		CONDENSER ENTERING AIR TEMPERATURES ° F (° C)																	
CFM	EWB ° F (° C)	75 (23.9)			85 (29.4)			95 (35)			105 (40.6)			115 (46.1)			125 (51.7)		
		Capacity MBtuh Total	Capacity MBtuh Sens†	Total Sys. KW**	Capacity MBtuh Total	Capacity MBtuh Sens†	Total Sys. KW**	Capacity MBtuh Total	Capacity MBtuh Sens†	Total Sys. KW**	Capacity MBtuh Total	Capacity MBtuh Sens†	Total Sys. KW**	Capacity MBtuh Total	Capacity MBtuh Sens†	Total Sys. KW**	Capacity MBtuh Total	Capacity MBtuh Sens†	Total Sys. KW**
900	57 (13.9)	33.46	33.46	2.30	32.30	32.30	2.58	31.04	31.04	2.91	29.65	29.65	3.29	28.10	28.10	3.73	26.35	26.35	4.23
	62 (16.7)	35.72	30.52	2.32	34.20	29.82	2.60	32.55	29.06	2.92	30.73	28.23	3.30	28.74	27.31	3.73	26.57	26.29	4.23
	63 (17.2)††	36.47	25.16	2.33	34.94	24.47	2.61	33.24	23.70	2.93	31.37	22.87	3.31	29.33	21.97	3.74	27.06	20.98	4.23
	67 (19.4)	39.41	26.11	2.36	37.73	25.40	2.63	35.92	24.64	2.95	33.89	23.80	3.33	31.70	22.90	3.76	29.25	21.90	4.26
	72 (22.2)	43.45	21.55	2.40	41.62	20.84	2.66	39.60	20.08	2.98	37.39	19.25	3.36	34.95	18.34	3.79	32.28	17.36	4.29
975	57 (13.9)	34.48	34.48	2.34	33.27	33.27	2.62	31.95	31.95	2.95	30.48	30.48	3.33	28.85	28.85	3.76	27.02	27.02	4.27
	62 (16.7)	36.31	31.90	2.36	34.75	31.19	2.63	33.05	30.41	2.96	31.18	29.56	3.33	29.15	28.61	3.77	27.06	27.06	4.27
	63 (17.2)††	37.05	26.10	2.36	35.45	25.38	2.64	33.70	24.62	2.96	31.79	23.77	3.34	29.67	22.86	3.78	27.35	21.86	4.27
	67 (19.4)	40.02	27.11	2.39	38.28	26.39	2.66	36.39	25.61	2.98	34.33	24.77	3.36	32.04	23.85	3.79	29.55	22.85	4.29
	72 (22.2)	44.08	22.16	2.43	42.18	21.45	2.70	40.11	20.67	3.02	37.82	19.83	3.39	35.33	18.92	3.82	32.57	17.93	4.32
1050	57 (13.9)	35.40	35.40	2.38	34.14	34.14	2.66	32.76	32.76	2.98	31.23	31.23	3.36	29.52	29.52	3.80	27.61	27.61	4.30
	62 (16.7)	36.83	33.26	2.39	35.21	32.52	2.66	33.48	31.73	2.99	31.58	30.84	3.37	29.57	29.57	3.80	27.66	27.66	4.31
	63 (17.2)††	37.54	27.01	2.40	35.89	26.29	2.67	34.10	25.51	2.99	32.12	24.65	3.37	29.97	23.74	3.81	27.58	22.71	4.30
	67 (19.4)	40.53	28.08	2.42	38.74	27.35	2.70	36.80	26.57	3.02	34.67	25.71	3.39	32.33	24.78	3.83	29.79	23.78	4.33
	72 (22.2)	44.61	22.76	2.47	42.67	22.04	2.73	40.53	21.26	3.05	38.01	20.34	3.41	35.62	19.48	3.86	32.81	18.48	4.35
1200	57 (13.9)	37.04	37.04	2.45	35.66	35.66	2.73	34.18	34.18	3.05	32.53	32.53	3.44	30.68	30.68	3.87	28.63	28.63	4.37
	62 (16.7)	37.72	35.86	2.45	36.06	35.08	2.73	34.41	33.92	3.06	32.57	32.57	3.43	30.72	30.72	3.87	28.67	28.67	4.37
	63 (17.2)††	38.34	28.78	2.46	36.60	28.04	2.73	34.72	27.24	3.08	32.66	26.37	3.43	30.41	25.42	3.87	27.95	24.39	4.37
	67 (19.4)	41.34	29.98	2.49	39.46	29.23	2.76	37.42	28.43	3.08	35.22	27.56	3.46	32.80	26.62	3.89	30.15	25.59	4.39
	72 (22.2)	45.45	23.92	2.53	43.39	23.18	2.79	41.16	22.38	3.11	38.72	21.53	3.49	36.09	20.60	3.92	33.17	19.58	4.42
1350	57 (13.9)	38.41	38.41	2.52	36.94	36.94	2.79	35.35	35.35	3.12	33.60	33.60	3.50	31.63	31.63	3.94	29.46	29.46	4.44
	62 (16.7)	39.92	37.40	2.52	37.01	37.01	2.79	35.40	35.40	3.12	33.64	33.64	3.50	31.68	31.68	3.94	29.50	29.50	4.45
	63 (17.2)††	38.91	30.48	2.52	37.11	29.72	2.79	35.20	28.92	3.12	33.06	28.02	3.50	30.76	27.07	3.94	28.23	25.99	4.43
	67 (19.4)	41.93	31.81	2.55	39.99	31.05	2.82	37.90	30.24	3.14	35.45	29.29	3.51	33.13	28.39	3.96	30.42	27.34	4.45
	72 (22.2)	46.03	25.01	2.59	43.92	24.27	2.86	41.63	23.47	3.17	39.10	22.59	3.55	36.39	21.65	3.98	33.39	20.63	4.48
BA17NA036 – B Outdoor Section With CAP**372IAL* Indoor Section – Low																			
720	57 (13.9)	25.27	25.27	1.66	23.25	23.25	1.85	21.24	21.24	2.07	19.23	19.23	2.31	17.21	17.21	2.60	15.19	15.19	2.92
	62 (16.7)	26.45	23.83	1.65	24.11	22.20	1.84	21.80	20.58	2.06	19.50	18.97	2.31	17.25	17.25	2.60	15.21	15.21	2.92
	63 (17.2)††	27.05	19.40	1.65	24.65	17.98	1.84	22.28	16.57	2.06	19.92	15.19	2.31	17.57	13.81	2.60	15.23	12.44	2.92
	67 (19.4)	29.36	20.22	1.63	26.75	18.75	1.82	24.18	17.31	2.04	21.64	15.88	2.29	19.13	14.48	2.58	16.58	13.07	2.90
	72 (22.2)	32.60	16.54	1.61	29.69	15.23	1.80	26.85	13.96	2.02	24.04	12.71	2.27	21.26	11.47	2.56	18.49	10.25	2.88
780	57 (13.9)	26.04	26.04	1.68	23.93	23.93	1.87	21.85	21.85	2.08	19.76	19.76	2.33	17.67	17.67	2.62	15.57	15.57	2.94
	62 (16.7)	26.87	24.96	1.67	24.48	23.27	1.86	22.12	21.58	2.08	19.81	19.81	2.33	17.70	17.70	2.61	15.60	15.60	2.94
	63 (17.2)††	27.45	20.17	1.67	24.99	18.70	1.86	22.57	17.24	2.08	20.17	15.82	2.33	17.77	14.40	2.61	15.39	12.99	2.94
	67 (19.4)	29.78	21.06	1.65	27.11	19.54	1.84	24.49	18.04	2.06	21.89	16.57	2.31	19.31	15.11	2.60	16.75	13.67	2.92
	72 (22.2)	33.07	17.05	1.62	30.08	15.71	1.82	27.17	14.40	2.04	24.30	13.12	2.29	21.47	11.86	2.58	18.65	10.61	2.90
840	57 (13.9)	26.72	26.72	1.69	24.55	24.55	1.88	22.39	22.39	2.10	20.24	20.24	2.35	18.08	18.08	2.63	15.92	15.92	2.95
	62 (16.7)	27.25	26.07	1.69	24.81	24.29	1.88	22.45	22.42	2.10	20.27	20.27	2.35	18.11	18.11	2.63	15.94	15.94	2.95
	63 (17.2)††	27.79	20.93	1.69	25.28	19.40	1.88	22.81	17.92	2.10	20.36	16.45	2.35	17.93	14.99	2.63	15.51	13.54	2.96
	67 (19.4)	30.14	21.87	1.67	27.41	20.30	1.86	24.74	18.76	2.08	22.10	17.25	2.33	19.48	15.75	2.62	16.88	14.26	2.94
	72 (22.2)	33.44	17.54	1.64	30.40	16.17	1.84	27.44	14.84	2.06	24.52	13.53	2.31	21.65	12.24	2.60	18.78	10.97	2.92
980	57 (13.9)	28.12	28.12	1.73	25.78	25.78	1.92	23.48	23.48	2.14	21.18	21.18	2.39	18.89	18.89	2.67	16.59	16.59	2.99
	62 (16.7)	28.46	27.56	1.73	25.85	25.85	1.92	23.52	23.52	2.14	21.21	21.21	2.39	18.91	18.91	2.67	16.62	16.62	2.99
	63 (17.2)††	28.40	22.63	1.73	25.80	21.02	1.92	23.24	19.44	2.14	20.72	17.87	2.39	18.22	16.32	2.68	15.74	14.77	3.01
	67 (19.4)	30.78	23.71	1.71	27.95	22.04	1.91	25.19	20.40	2.13	22.47	18.79	2.38	19.77	17.19	2.66	17.10	15.60	2.99
	72 (22.2)	34.12	18.66	1.69	30.98	17.23	1.88	27.90	15.83	2.11	24.90	14.46	2.36	21.93	13.11	2.64	18.99	11.78	2.97
1080	57 (13.9)	28.95	28.95	1.76	26.52	26.52	1.95	24.12	24.12	2.17	21.74	21.74	2.42	19.36	19.36	2.70	16.98	16.98	3.02
	62 (16.7)	29.00	29.00	1.76	26.56	26.56	1.95	24.15	24.15	2.17	21.77	21.77	2.42	19.39	19.39	2.70	17.00	17.00	3.02
	63 (17.2)††	28.73	23.81	1.76	26.07	22.13	1.96	23.48	20.49	2.18	20.92	18.86	2.43	18.38	17.23	2.71	15.89	15.59	3.04
	67 (19.4)	31.12	24.98	1.74	28.23	23.24	1.94	25.43	21.54	2.16	22.67	19.86	2.41	19.93	18.19	2.70	17.24	16.52	3.02
72 (22.2)	34.46	19.43	1.72	31.26	17.96	1.92	28.14	16.52	2.14	25.09	15.12	2.39	22.06	13.72	2.68	19.08	12.35	3.00	

DETAILED COOLING CAPACITIES# (CONTINUED)

EVAPORATOR AIR		CONDENSER ENTERING AIR TEMPERATURES ° F (° C)																	
CFM	EWB ° F (° C)	75 (23.9)			85 (29.4)			95 (35)			105 (40.6)			115 (46.1)			125 (51.7)		
		Capacity MBtuh Total	Total Sys. KW**		Capacity MBtuh Total	Total Sys. KW**		Capacity MBtuh Total	Total Sys. KW**		Capacity MBtuh Total	Total Sys. KW**		Capacity MBtuh Total	Total Sys. KW**		Capacity MBtuh Total	Total Sys. KW**	
		BA17NA048-B Outdoor Section With CAP**6124AL* Indoor Section - High																	
1200	57 (13.9)	44.81	44.81	3.12	43.25	43.25	3.43	41.48	41.48	3.79	39.59	39.59	4.21	37.63	37.63	4.70	35.66	35.66	5.28
	62 (16.7)	47.79	40.93	3.14	45.71	39.92	3.45	43.41	38.82	3.80	40.97	37.66	4.22	38.49	36.48	4.71	36.03	35.28	5.29
	63 (17.2)††	48.76	33.72	3.15	46.64	32.72	3.46	44.28	31.63	3.81	41.77	30.48	4.23	39.22	29.33	4.72	36.65	28.19	5.30
	67 (19.4)	52.67	34.96	3.17	50.37	33.98	3.48	47.84	32.88	3.84	45.17	31.74	4.26	42.46	30.61	4.75	39.73	29.48	5.33
	72 (22.2)	57.99	28.83	3.19	55.51	27.82	3.51	52.75	26.77	3.87	49.88	25.64	4.30	46.96	24.56	4.80	44.00	23.46	5.39
1300	57 (13.9)	46.17	44.53	3.17	44.53	44.53	3.48	42.68	42.68	3.84	40.70	40.70	4.26	38.66	38.66	4.75	36.59	36.59	5.33
	62 (16.7)	48.57	42.76	3.18	46.44	41.74	3.49	44.07	40.61	3.85	41.57	39.42	4.26	39.06	38.18	4.75	36.86	36.28	5.33
	63 (17.2)††	49.51	34.97	3.19	47.31	33.95	3.50	44.88	32.84	3.85	42.30	31.68	4.27	39.68	30.51	4.76	37.07	29.36	5.33
	67 (19.4)	53.44	36.30	3.21	51.08	35.28	3.52	48.47	34.18	3.88	45.73	33.03	4.30	42.95	31.88	4.79	40.14	30.74	5.38
	72 (22.2)	58.81	29.66	3.23	56.23	28.64	3.55	53.42	27.54	3.91	50.45	26.45	4.34	47.46	25.33	4.84	44.43	24.22	5.43
1400	57 (13.9)	47.41	47.41	3.21	45.69	45.69	3.53	43.76	43.76	3.88	41.70	41.70	4.30	39.57	39.57	4.80	37.43	37.43	5.38
	62 (16.7)	49.26	44.55	3.22	47.07	43.51	3.53	44.66	42.36	3.89	42.14	41.11	4.31	40.07	38.78	4.80	37.49	37.49	5.38
	63 (17.2)††	50.14	36.17	3.23	47.88	35.15	3.54	45.39	34.03	3.90	42.76	32.85	4.31	40.07	31.67	4.80	37.39	30.50	5.38
	67 (19.4)	54.09	37.59	3.25	51.66	36.57	3.56	49.00	35.45	3.92	46.19	34.30	4.34	43.34	33.12	4.84	40.48	31.97	5.42
	72 (22.2)	59.49	30.46	3.27	56.86	29.39	3.59	53.97	28.30	3.95	50.93	27.20	4.38	47.87	26.09	4.88	44.77	24.97	5.48
1500	57 (13.9)	48.54	48.54	3.26	46.75	46.75	3.57	44.74	44.74	3.93	42.60	42.60	4.35	40.40	40.40	4.84	38.18	38.18	5.43
	62 (16.7)	49.88	46.31	3.26	47.65	45.23	3.58	45.22	44.03	3.93	43.10	41.75	4.35	40.47	40.47	4.85	38.24	38.24	5.43
	63 (17.2)††	50.69	37.36	3.27	48.38	36.31	3.58	45.82	35.19	3.94	43.13	33.99	4.35	40.41	32.82	4.84	37.68	31.63	5.42
	67 (19.4)	54.66	38.86	3.29	52.16	37.82	3.63	49.45	36.70	3.96	46.58	35.53	4.38	43.69	34.36	4.88	40.78	33.19	5.46
	72 (22.2)	60.09	31.19	3.31	57.37	30.20	3.63	54.40	29.10	3.99	51.32	27.97	4.42	48.20	26.84	4.93	45.05	25.72	5.52
1600	57 (13.9)	49.57	49.57	3.30	47.70	47.70	3.61	45.63	45.63	3.97	43.42	43.42	4.39	41.15	41.15	4.89	38.86	38.86	5.48
	62 (16.7)	50.46	48.01	3.31	48.20	46.89	3.62	46.02	45.05	3.98	43.49	43.49	4.40	41.21	41.21	4.89	38.92	38.92	5.48
	63 (17.2)††	51.16	38.52	3.31	48.80	37.46	3.62	46.19	36.32	3.98	43.46	35.12	4.39	40.69	33.92	4.89	37.92	32.73	5.47
	67 (19.4)	55.13	40.11	3.33	52.60	39.06	3.64	49.85	37.93	4.00	46.91	36.75	4.42	43.99	35.57	4.92	41.04	34.39	5.50
	72 (22.2)	60.59	31.95	3.35	57.80	30.95	3.67	54.78	29.83	4.03	51.65	28.70	4.46	48.48	27.56	4.97	45.28	26.43	5.56
1700	57 (13.9)	50.51	50.51	3.34	48.59	48.59	3.66	46.44	46.44	4.02	44.16	44.16	4.44	41.83	41.83	4.94	39.47	39.47	5.53
	62 (16.7)	51.01	49.65	3.35	48.77	48.41	3.66	46.53	46.53	4.02	44.23	44.23	4.44	41.89	41.89	4.94	39.53	39.53	5.53
	63 (17.2)††	51.57	39.66	3.35	49.15	38.59	3.66	46.52	37.44	4.02	43.77	36.24	4.43	40.93	35.02	4.93	38.15	33.82	5.51
	67 (19.4)	55.56	41.33	3.37	52.97	40.28	3.68	50.13	39.12	4.04	47.24	37.96	4.46	44.24	36.75	4.96	41.26	35.57	5.55
	72 (22.2)	60.99	32.71	3.39	58.16	31.69	3.71	55.11	30.57	4.07	51.93	29.42	4.50	48.71	28.27	5.01	45.47	27.13	5.60
		BA17NA048-B Outdoor Section With CAP**6124AL* Indoor Section - Low																	
960	57 (13.9)	33.80	33.80	2.21	31.13	31.13	2.49	28.39	28.39	2.81	25.62	25.62	3.17	22.86	22.86	3.58	20.12	20.12	4.04
	62 (16.7)	35.36	31.84	2.19	32.26	29.72	2.48	29.07	27.57	2.80	25.88	25.39	3.17	22.90	22.90	3.58	20.16	20.16	4.04
	63 (17.2)††	36.13	25.91	2.19	32.96	24.06	2.48	29.70	22.17	2.80	26.40	20.29	3.16	23.13	18.43	3.58	19.90	16.60	4.05
	67 (19.4)	39.28	27.05	2.16	35.89	25.16	2.45	32.41	23.24	2.78	28.90	21.33	3.14	25.40	19.44	3.56	21.95	17.58	4.03
	72 (22.2)	43.74	22.16	2.13	40.05	20.51	2.43	36.26	18.83	2.75	32.44	17.14	3.12	28.64	15.48	3.54	24.87	13.85	4.00
1010	57 (13.9)	34.44	34.44	2.22	31.72	31.72	2.50	28.92	28.92	2.82	26.09	26.09	3.18	23.27	23.27	3.59	20.47	20.47	4.06
	62 (16.7)	35.71	32.77	2.21	32.58	30.62	2.50	29.37	28.41	2.82	26.34	25.76	3.18	23.31	23.31	3.59	20.51	20.51	4.06
	63 (17.2)††	36.47	26.56	2.20	33.25	24.68	2.49	29.95	22.75	2.82	26.62	20.84	3.18	23.30	18.94	3.60	20.04	17.08	4.06
	67 (19.4)	39.65	27.74	2.18	36.21	25.82	2.47	32.68	23.87	2.80	29.13	21.92	3.16	25.60	19.99	3.58	22.11	18.10	4.04
	72 (22.2)	44.16	22.60	2.15	40.42	20.90	2.44	36.57	19.21	2.77	32.70	17.51	3.14	28.85	15.82	3.55	25.04	14.17	4.02
1120	57 (13.9)	35.74	35.74	2.25	32.90	32.90	2.53	29.98	29.98	2.85	27.03	27.03	3.22	24.09	24.09	3.63	21.17	21.17	4.09
	62 (16.7)	36.44	34.83	2.24	33.25	32.52	2.53	30.67	28.81	2.85	27.08	27.08	3.22	24.13	24.13	3.63	21.21	21.21	4.09
	63 (17.2)††	37.11	27.95	2.24	33.82	25.99	2.53	30.44	24.01	2.85	27.02	22.02	3.22	23.63	20.05	3.63	20.31	18.11	4.10
	67 (19.4)	40.33	29.26	2.21	36.81	27.25	2.50	33.20	25.22	2.83	29.56	23.20	3.20	25.95	21.19	3.61	22.40	19.22	4.10
	72 (22.2)	44.91	23.52	2.18	41.07	21.79	2.48	37.13	20.06	2.81	33.17	18.29	3.18	29.23	16.56	3.59	25.33	14.86	4.06
1280	57 (13.9)	37.37	37.37	2.29	34.37	34.37	2.58	31.30	31.30	2.90	28.20	28.20	3.27	25.10	25.10	3.68	22.04	22.04	4.14
	62 (16.7)	37.95	36.41	2.29	34.43	34.43	2.58	31.35	31.35	2.90	28.24	28.24	3.27	25.14	25.14	3.68	22.08	22.07	4.14
	63 (17.2)††	38.74	29.90	2.29	34.45	29.85	2.58	31.36	31.36	2.91	27.48	23.68	3.27	24.02	21.61	3.69	20.64	19.55	4.16
	67 (19.4)	41.11	31.35	2.26	37.49	29.26	2.56	33.79	27.13	2.88	30.06	24.99	3.25	26.37	22.89	3.67	22.74	20.81	4.13
	72 (22.2)	45.75	24.82	2.23	41.79	23.02	2.53	37.75	21.20	2.86	33.68	19.39	3.23	29.63	17.60	3.65	25.63	15.84	4.11
1440	57 (13.9)	38.75	38.75	2.34	35.62	35.62	2.63	32.42	32.42	2.95	29.18	29.18	3.32	25.95	25.95	3.73	22.76	22.76	4.19
	62 (16.7)	38.81	38.81	2.34	35.68	35.68	2.63	32.47	32.47	2.95	29.23	29.23	3.32	25.99	25.99	3.73	22.79	22.79	4.19
	63 (17.2)††	39.40	29.64	2.34	34.94	29.64	2.63	31.40	27.46	2.96	27.84	25.28	3.33	24.34	23.09	3.74	20.96	20.84	4.21
	67 (19.4)	41.71	33.40	2.32	38.01	31.21	2.61	34.23	28.98	2.94	30.44	26.75	3.31	26.70	24.52	3.72	23.04	22.29	4.19
	72 (22.2)	46.37	26.04	2.29	42.32	24.19	2.58	38.18	22.34	2.91	34.02	26.49	3.29	29.90	18.61	3.70	25.84	16.78	4.17

DETAILED COOLING CAPACITIES# (CONTINUED)

EVAPORATOR AIR		CONDENSER ENTERING AIR TEMPERATURES ° F (° C)																								
CFM	EWB ° F (° C)	75 (23.9)				85 (29.4)				95 (35)				105 (40.6)				115 (46.1)				125 (51.7)				
		Capacity MBtuh Total	Sens†	Total Sys. KW**		Capacity MBtuh Total	Sens†	Total Sys. KW**		Capacity MBtuh Total	Sens†	Total Sys. KW**		Capacity MBtuh Total	Sens†	Total Sys. KW**		Capacity MBtuh Total	Sens†	Total Sys. KW**		Capacity MBtuh Total	Sens†	Total Sys. KW**		
1500	57 (13.9)	52.86	52.86	3.81	51.03	51.03	4.17	49.08	49.08	4.58	46.93	46.93	5.05	44.52	44.52	5.60	41.77	41.77	5.60	41.77	41.77	5.60	41.77	41.77	5.60	41.77
	62 (16.7)	55.69	48.76	3.84	53.31	47.64	4.19	50.79	46.46	4.60	48.06	45.18	5.07	45.06	43.75	5.60	41.74	41.74	5.60	41.74	41.74	5.60	41.74	41.74	5.60	41.74
	63 (17.2)†	56.79	39.92	3.85	54.36	38.80	4.20	51.76	37.63	4.61	48.94	36.37	5.07	45.81	34.99	5.61	42.35	33.48	5.61	42.35	33.48	5.61	42.35	33.48	5.61	42.35
	67 (19.4)	61.31	41.44	3.90	58.67	40.31	4.25	55.83	39.13	4.65	52.75	37.85	5.12	49.38	36.47	5.66	45.62	34.95	5.66	45.62	34.95	5.66	45.62	34.95	5.66	45.62
	72 (22.2)	67.55	33.95	3.96	64.42	32.75	4.30	61.47	31.63	4.72	58.04	30.35	5.18	54.28	28.96	5.72	50.16	27.42	5.72	50.16	27.42	5.72	50.16	27.42	5.72	50.16
1625	57 (13.9)	54.39	54.39	3.88	52.47	52.47	4.23	50.41	50.41	4.64	48.15	48.15	5.12	45.60	45.60	5.66	42.74	42.74	5.66	42.74	42.74	5.66	42.74	42.74	5.66	42.74
	62 (16.7)	56.55	50.96	3.90	54.10	49.81	4.25	51.51	48.60	4.66	48.72	47.26	5.12	45.72	45.62	5.66	42.80	42.80	5.66	42.80	42.80	5.66	42.80	42.80	5.66	42.80
	63 (17.2)†	57.59	41.39	3.91	55.07	40.26	4.26	52.40	39.08	4.68	49.48	37.79	5.13	46.28	36.40	5.67	42.72	34.86	5.67	42.72	34.86	5.67	42.72	34.86	5.67	42.72
	67 (19.4)	62.15	43.03	3.95	59.42	41.89	4.30	56.50	40.68	4.71	53.33	39.39	5.18	49.84	37.98	5.71	45.99	36.44	5.71	45.99	36.44	5.71	45.99	36.44	5.71	45.99
	72 (22.2)	68.43	34.93	4.02	65.39	33.78	4.37	62.16	32.57	4.77	58.63	31.26	5.24	54.80	29.86	5.78	50.53	28.32	5.78	50.53	28.32	5.78	50.53	28.32	5.78	50.53
1750	57 (13.9)	55.76	55.76	3.94	53.76	53.76	4.29	51.60	51.60	4.71	49.24	49.24	5.18	46.59	46.59	5.72	43.60	43.60	5.72	43.60	43.60	5.72	43.60	43.60	5.72	43.60
	62 (16.7)	57.31	53.09	3.95	54.80	51.91	4.31	52.18	50.65	4.71	49.87	48.12	5.19	46.66	46.66	5.72	43.67	43.67	5.72	43.67	43.67	5.72	43.67	43.67	5.72	43.67
	63 (17.2)†	58.26	42.83	3.96	55.68	41.69	4.31	52.92	40.47	4.72	49.93	39.18	5.19	46.67	37.77	5.72	43.03	36.21	5.72	43.03	36.21	5.72	43.03	36.21	5.72	43.03
	67 (19.4)	62.85	44.57	4.01	60.03	43.41	4.36	57.05	42.19	4.76	53.79	40.87	5.23	50.24	39.46	5.77	46.31	37.90	5.77	46.31	37.90	5.77	46.31	37.90	5.77	46.31
	72 (22.2)	69.20	35.92	4.08	65.95	34.66	4.42	62.68	33.47	4.83	59.12	32.16	5.29	55.14	30.71	5.83	50.83	29.18	5.83	50.83	29.18	5.83	50.83	29.18	5.83	50.83
2000	57 (13.9)	58.07	58.07	4.06	55.90	55.90	4.42	53.58	53.58	4.83	51.01	51.01	5.30	48.19	48.19	5.84	44.96	44.96	5.84	44.96	44.96	5.84	44.96	44.96	5.84	44.96
	62 (16.7)	58.62	57.09	4.07	56.08	55.76	4.42	53.66	53.66	4.83	51.09	51.09	5.30	48.25	48.25	5.84	45.03	45.03	5.84	45.03	45.03	5.84	45.03	45.03	5.84	45.03
	63 (17.2)†	59.34	45.61	4.07	56.82	44.43	4.42	53.75	43.19	4.83	50.63	41.85	5.29	47.24	40.41	5.83	43.48	38.79	5.83	43.48	38.79	5.83	43.48	38.79	5.83	43.48
	67 (19.4)	63.96	47.56	4.12	61.03	46.38	4.47	57.88	45.12	4.87	54.51	43.77	5.34	50.80	42.30	5.87	46.76	40.71	5.87	46.76	40.71	5.87	46.76	40.71	5.87	46.76
	72 (22.2)	70.34	37.66	4.19	67.07	36.47	4.53	63.58	35.22	4.93	59.85	33.88	5.40	55.75	32.43	5.94	51.28	30.87	5.94	51.28	30.87	5.94	51.28	30.87	5.94	51.28
1100	57 (13.9)	39.47	39.47	2.61	36.39	36.39	2.93	33.18	33.17	3.30	29.90	29.90	3.71	26.63	26.63	4.17	23.40	23.40	4.17	23.40	23.40	4.17	23.40	23.40	4.17	23.40
	62 (16.7)	41.54	36.96	2.59	37.89	34.50	2.92	34.11	31.99	3.29	30.29	29.44	3.71	26.70	26.70	4.17	23.44	23.44	4.17	23.44	23.44	4.17	23.44	23.44	4.17	23.44
	63 (17.2)†	42.47	30.19	2.59	38.74	28.02	2.92	34.87	25.80	3.29	30.92	23.57	3.71	27.01	21.39	4.17	23.18	19.23	4.17	23.18	19.23	4.17	23.18	19.23	4.17	23.18
	67 (19.4)	46.16	31.48	2.56	42.12	29.27	2.89	37.96	27.00	3.27	33.75	24.71	3.68	29.56	22.50	4.15	25.47	20.32	4.15	25.47	20.32	4.15	25.47	20.32	4.15	25.47
	72 (22.2)	51.16	25.80	2.52	46.73	23.82	2.86	42.18	21.81	3.24	37.59	19.81	3.66	33.03	17.84	4.13	28.56	15.92	4.13	28.56	15.92	4.13	28.56	15.92	4.13	28.56
1225	57 (13.9)	41.11	41.11	2.64	37.86	37.86	2.97	34.48	34.48	3.34	31.05	31.05	3.75	27.62	27.62	4.21	24.23	24.23	4.21	24.23	24.23	4.21	24.23	24.23	4.21	24.23
	62 (16.7)	42.45	39.32	2.63	38.70	36.74	2.96	34.84	34.07	3.33	31.11	31.11	3.75	27.67	27.67	4.21	24.27	24.27	4.21	24.27	24.27	4.21	24.27	24.27	4.21	24.27
	63 (17.2)†	43.35	31.80	2.63	39.49	29.54	2.96	35.50	27.24	3.33	31.45	24.93	3.75	27.43	22.64	4.22	23.51	20.42	4.22	23.51	20.42	4.22	23.51	20.42	4.22	23.51
	67 (19.4)	47.06	33.20	2.60	42.89	30.88	2.93	38.60	28.53	3.31	34.28	26.17	3.73	29.98	23.86	4.19	25.80	21.61	4.19	25.80	21.61	4.19	25.80	21.61	4.19	25.80
	72 (22.2)	52.13	26.86	2.56	47.56	24.83	2.90	42.87	22.76	3.28	38.15	20.70	3.70	33.47	18.67	4.17	28.89	16.70	4.17	28.89	16.70	4.17	28.89	16.70	4.17	28.89
1350	57 (13.9)	42.54	42.54	2.67	39.15	39.15	3.00	35.63	35.63	3.37	32.05	32.05	3.79	28.47	28.47	4.25	24.94	24.94	4.25	24.94	24.94	4.25	24.94	24.94	4.25	24.94
	62 (16.7)	43.25	41.59	2.67	39.54	38.98	3.00	35.69	35.69	3.37	32.10	32.10	3.79	28.52	28.52	4.25	24.98	24.98	4.25	24.98	24.98	4.25	24.98	24.98	4.25	24.98
	63 (17.2)†	44.04	33.35	2.67	41.92	41.92	2.98	36.00	28.63	3.37	31.86	26.24	3.79	27.77	23.88	4.26	23.78	21.57	4.26	23.78	21.57	4.26	23.78	21.57	4.26	23.78
	67 (19.4)	47.76	34.85	2.64	43.49	32.46	2.97	39.11	30.03	3.35	34.69	27.60	3.77	30.32	25.20	4.24	26.05	22.85	4.24	26.05	22.85	4.24	26.05	22.85	4.24	26.05
	72 (22.2)	52.88	27.89	2.60	48.19	25.79	2.94	43.39	23.67	3.32	38.57	21.56	3.74	33.80	19.49	4.21	29.12	17.46	4.21	29.12	17.46	4.21	29.12	17.46	4.21	29.12
1475	57 (13.9)	43.82	43.82	2.71	40.29	40.29	3.04	36.62	36.62	3.41	32.91	32.91	3.83	29.16	29.16	4.29	25.55	25.55	4.29	25.55	25.55	4.29	25.55	25.55	4.29	25.55
	62 (16.7)	44.56	42.51	2.70	40.36	40.36	3.04	36.68	36.68	3.41	32.96	32.96	3.82	29.24	29.24	4.29	25.59	25.59	4.29	25.59	25.59	4.29	25.59	25.59	4.29	25.59
	63 (17.2)†	44.62	34.87	2.71	40.58	32.45	3.04	36.41	29.99	3.41	32.20	27.53	3.83	28.04	27.53	4.30	24.01	22.68	4.30	24.01	22.68	4.30	24.01	22.68	4.30	24.01
	67 (19.4)	48.34	36.48	2.68	43.99	34.01	3.01	39.45	31.46	3.39	35.02	28.98	3.81	30.58	26.50	4.28	24.06	22.01	4.28	24.06	22.01	4.28	24.06	22.01	4.28	24.06
	72 (22.2)	53.48	28.88	2.64	48.68	26.74	2.98	43.67	24.54	3.35	38.90	22.39	3.78	34.04	20.27	4.25	23.30	18.21	4.25	23.30	18.21	4.25	23.30	18.21	4.25	23.30

CONDENSER ONLY RATINGS*

SST ° F (° C)		CONDENSER ENTERING AIR TEMPERATURES ° F (° C)							
		55 (12.78)	65 (18.33)	75 (23.89)	85 (29.44)	95 (35.0)	105 (40.56)	115 (46.11)	125 (51.67)
BA17NA024–B – High									
30 (–1.11)	TCG	20.20	19.70	19.00	18.10	17.10	16.00	14.80	13.60
	SDT	71.20	81.10	90.90	100.60	110.20	119.90	129.60	139.40
	KW	1.07	1.20	1.34	1.49	1.67	1.87	2.12	2.41
35 (1.67)	TCG	22.50	21.90	21.10	20.10	19.10	17.90	16.70	15.30
	SDT	72.70	82.40	92.20	101.80	111.40	121.10	130.80	140.50
	KW	1.10	1.23	1.36	1.51	1.69	1.90	2.15	2.44
40 (4.44)	TCG	24.90	24.20	23.30	22.30	21.20	20.00	18.60	17.20
	SDT	74.20	83.80	93.50	103.10	112.70	122.30	132.00	141.60
	KW	1.12	1.25	1.38	1.54	1.71	1.92	2.17	2.47
45 (7.22)	TCG	27.50	26.70	25.70	24.60	23.40	22.10	20.70	19.20
	SDT	75.70	85.30	94.90	104.50	114.00	123.50	133.10	142.80
	KW	1.15	1.27	1.40	1.56	1.73	1.95	2.20	2.50
50 (10.0)	TCG	30.30	29.40	28.30	27.10	25.80	24.40	23.00	21.40
	SDT	77.30	86.90	96.40	105.90	115.30	124.80	134.30	143.90
	KW	1.17	1.29	1.42	1.58	1.76	1.97	2.22	2.53
55 (12.78)	TCG	33.30	32.20	31.10	29.80	28.40	26.90	25.30	23.70
	SDT	79.00	88.40	97.90	107.30	116.70	126.10	135.60	145.00
	KW	1.19	1.31	1.44	1.60	1.78	1.99	2.25	2.56
60 (15.56)	TCG	36.40	35.20	34.00	32.60	31.10	29.50	27.90	26.10
	SDT	80.70	90.10	99.40	108.80	118.10	127.40	136.80	146.20
	KW	1.21	1.33	1.46	1.62	1.80	2.02	2.28	2.58
BA17NA024–B – Low									
30 (–1.11)	TCG	14.50	14.20	13.70	12.90	12.00	11.00	9.90	8.80
	SDT	63.50	73.40	83.10	92.70	102.20	111.70	121.10	130.60
	KW	0.79	0.91	1.04	1.18	1.34	1.51	1.69	1.90
35 (1.67)	TCG	16.20	15.90	15.30	14.50	13.50	12.40	11.30	10.20
	SDT	64.30	74.10	83.80	93.40	102.90	112.30	121.80	131.20
	KW	0.78	0.90	1.02	1.17	1.33	1.50	1.69	1.89
40 (4.44)	TCG	18.10	17.70	17.00	16.10	15.10	14.00	12.80	11.60
	SDT	65.20	75.00	84.60	94.10	103.60	113.00	122.40	131.80
	KW	0.77	0.88	1.01	1.15	1.31	1.49	1.68	1.89
45 (7.22)	TCG	20.10	19.60	18.80	17.80	16.70	15.50	14.30	13.00
	SDT	66.10	75.80	85.40	94.90	104.30	113.70	123.10	132.40
	KW	0.76	0.87	0.99	1.14	1.30	1.47	1.67	1.89
50 (10.0)	TCG	22.20	21.60	20.70	19.70	18.50	17.20	15.90	14.50
	SDT	67.10	76.70	86.10	95.70	105.00	114.40	123.70	133.10
	KW	0.75	0.85	0.98	1.12	1.28	1.46	1.66	1.88
55 (12.78)	TCG	24.50	23.70	22.70	21.60	20.30	19.00	17.50	16.10
	SDT	68.10	77.60	87.10	96.50	105.80	115.10	124.40	133.70
	KW	0.73	0.83	0.96	1.10	1.26	1.45	1.65	1.88
60 (15.56)	TCG	26.90	26.00	24.90	23.60	22.20	20.80	19.30	17.70
	SDT	69.10	78.60	88.00	97.30	106.60	115.90	125.10	134.40
	KW	0.71	0.81	0.93	1.08	1.24	1.43	1.64	1.87
BA17NA036–B – High									
30 (–1.11)	TCG	31.90	30.70	29.40	28.00	26.50	24.90	23.00	20.90
	SDT	71.60	81.10	90.60	100.20	109.60	119.10	128.40	137.70
	KW	1.61	1.77	1.97	2.19	2.45	2.74	3.06	3.42
35 (1.67)	TCG	35.30	34.00	32.60	31.10	29.50	27.60	25.60	23.30
	SDT	73.10	82.50	92.00	101.40	110.80	120.20	129.50	138.70
	KW	1.65	1.81	2.00	2.22	2.48	2.77	3.10	3.46
40 (4.44)	TCG	38.90	37.50	36.00	34.40	32.60	30.60	28.40	26.00
	SDT	74.70	84.00	93.40	102.80	112.20	121.40	130.60	139.80
	KW	1.69	1.85	2.03	2.25	2.51	2.80	3.13	3.50
45 (7.22)	TCG	42.70	41.20	39.60	37.90	36.00	33.80	31.40	28.80
	SDT	76.30	85.60	94.90	104.20	113.50	122.70	131.80	140.80
	KW	1.74	1.89	2.07	2.29	2.54	2.83	3.16	3.53
50 (10.0)	TCG	46.70	45.10	43.40	41.60	39.50	37.20	34.60	31.80
	SDT	77.90	87.20	96.50	105.70	114.90	124.00	133.00	141.90
	KW	1.80	1.93	2.11	2.32	2.57	2.87	3.20	3.57
55 (12.78)	TCG	50.90	49.30	47.50	45.50	43.30	40.80	38.00	35.00
	SDT	79.70	88.90	98.10	107.20	116.30	125.30	134.20	143.10
	KW	1.85	1.98	2.15	2.36	2.61	2.90	3.23	3.60
60 (15.56)	TCG	55.40	53.60	51.70	49.60	47.20	44.60	41.60	38.40
	SDT	81.50	90.60	99.70	108.80	117.80	126.70	135.50	144.20
	KW	1.92	2.04	2.20	2.40	2.65	2.94	3.27	3.64

See notes on page 19

CONDENSER ONLY RATINGS* CONTINUED

SST ° F (° C)		CONDENSER ENTERING AIR TEMPERATURES ° F (° C)							
		55 (12.78)	65 (18.33)	75 (23.89)	85 (29.44)	95 (35.0)	105 (40.56)	115 (46.11)	125 (51.67)
BA17NA036-B – Low									
30 (-1.11)	TCG	21.70	20.80	19.90	19.00	17.90	16.70	15.20	13.60
	SDT	64.40	74.10	83.70	93.30	102.90	112.50	121.90	131.40
	KW	1.44	1.49	1.54	1.59	1.63	1.66	1.67	1.66
35 (1.67)	TCG	24.20	23.20	22.20	21.20	20.00	18.70	17.20	15.40
	SDT	65.40	74.90	84.50	94.10	103.70	113.20	122.60	132.00
	KW	1.41	1.47	1.53	1.58	1.62	1.65	1.66	1.65
40 (4.44)	TCG	27.00	25.90	24.70	23.60	22.30	20.90	19.20	17.40
	SDT	66.30	75.80	85.40	95.00	104.50	114.00	123.30	132.70
	KW	1.38	1.45	1.51	1.56	1.60	1.64	1.65	1.64
45 (7.22)	TCG	29.90	28.70	27.40	26.10	24.80	23.20	21.50	19.50
	SDT	67.40	76.80	86.40	95.90	105.40	114.70	124.10	133.40
	KW	1.34	1.42	1.49	1.54	1.59	1.62	1.64	1.62
50 (10.0)	TCG	33.10	31.70	30.30	28.90	27.40	25.70	23.80	21.70
	SDT	68.50	77.90	87.40	96.80	106.30	115.60	124.90	134.10
	KW	1.31	1.39	1.47	1.53	1.58	1.61	1.62	1.61
55 (12.78)	TCG	36.40	34.90	33.40	31.80	30.10	28.30	26.20	24.00
	SDT	69.70	79.00	88.50	97.80	107.20	116.50	125.70	134.80
	KW	1.26	1.36	1.44	1.51	1.56	1.60	1.61	1.60
60 (15.56)	TCG	40.00	38.30	36.60	34.90	33.00	31.00	28.80	26.30
	SDT	70.90	80.20	89.50	98.90	108.20	117.40	126.50	135.60
	KW	1.22	1.33	1.42	1.49	1.55	1.58	1.60	1.58
BA17NA048-B – High									
30 (-1.11)	TCG	40.00	39.40	38.00	36.20	34.10	31.80	29.50	27.20
	SDT	71.70	81.50	91.20	100.70	110.10	119.60	129.20	139.00
	KW	2.03	2.28	2.54	2.83	3.16	3.54	3.99	4.52
35 (1.67)	TCG	44.60	43.70	42.20	40.20	38.00	35.50	33.10	30.70
	SDT	73.30	83.00	92.60	102.10	111.50	120.90	130.40	140.10
	KW	2.08	2.32	2.58	2.87	3.20	3.58	4.03	4.58
40 (4.44)	TCG	49.40	48.30	46.60	44.50	42.10	39.50	36.90	34.30
	SDT	75.00	84.60	94.10	103.50	112.80	122.20	131.70	141.30
	KW	2.12	2.36	2.62	2.91	3.24	3.63	4.09	4.63
45 (7.22)	TCG	54.40	53.10	51.30	48.90	46.40	43.60	40.90	38.20
	SDT	76.70	86.20	95.60	104.90	114.20	123.50	132.90	142.50
	KW	2.16	2.40	2.66	2.95	3.28	3.68	4.14	4.70
50 (10.0)	TCG	59.60	58.10	56.10	53.60	50.90	48.00	45.10	42.20
	SDT	78.40	87.80	97.10	106.30	115.60	124.80	134.20	143.60
	KW	2.19	2.43	2.69	2.99	3.33	3.73	4.20	4.76
55 (12.78)	TCG	64.90	63.30	61.00	58.40	55.50	52.50	49.50	46.40
	SDT	80.10	89.40	98.60	107.80	116.90	126.20	135.40	144.80
	KW	2.22	2.46	2.73	3.03	3.38	3.78	4.26	4.83
60 (15.56)	TCG	70.40	68.50	66.10	63.40	60.30	57.20	54.00	50.80
	SDT	81.80	91.00	100.20	109.20	118.30	127.50	136.60	145.90
	KW	2.25	2.49	2.76	3.06	3.42	3.84	4.33	4.90
BA17NA048-B – Low									
30 (-1.11)	TCG	28.80	27.80	26.40	24.60	22.60	20.30	17.80	15.10
	SDT	66.70	76.50	86.20	95.80	105.30	114.70	124.20	133.60
	KW	1.47	1.67	1.90	2.15	2.43	2.75	3.11	3.52
35 (1.67)	TCG	32.00	30.90	29.40	27.60	25.40	23.00	20.40	17.60
	SDT	67.80	77.50	87.20	96.80	106.30	115.60	125.10	134.60
	KW	1.44	1.65	1.88	2.13	2.42	2.75	3.10	3.51
40 (4.44)	TCG	35.50	34.30	32.70	30.80	28.50	26.00	23.30	20.30
	SDT	68.90	78.70	88.30	97.90	107.30	116.80	126.10	135.60
	KW	1.41	1.63	1.86	2.12	2.40	2.73	3.09	3.50
45 (7.22)	TCG	39.20	38.00	36.30	34.30	31.90	29.30	26.40	23.20
	SDT	70.10	79.80	89.50	99.00	108.40	117.80	127.20	136.60
	KW	1.39	1.60	1.84	2.10	2.39	2.72	3.08	3.50
50 (10.0)	TCG	43.30	42.00	40.20	38.10	35.60	32.80	29.70	26.30
	SDT	71.50	81.10	90.70	100.20	109.60	118.90	128.30	137.70
	KW	1.36	1.58	1.82	2.09	2.38	2.70	3.07	3.47
55 (12.78)	TCG	47.70	46.30	44.40	42.20	39.60	36.60	33.40	30.00
	SDT	72.80	82.50	92.00	101.50	110.80	120.20	129.40	138.70
	KW	1.33	1.56	1.80	2.07	2.36	2.69	3.06	3.47
60 (15.56)	TCG	52.50	51.00	49.00	46.60	43.90	40.80	37.40	33.80
	SDT	74.30	83.90	93.40	102.80	112.10	121.40	130.60	139.90
	KW	1.30	1.53	1.78	2.05	2.35	2.68	3.05	3.46

See notes on page 19

CONDENSER ONLY RATINGS* CONTINUED

SST ° F (° C)		CONDENSER ENTERING AIR TEMPERATURES ° F (° C)							
		55 (12.78)	65 (18.33)	75 (23.89)	85 (29.44)	95 (35.0)	105 (40.56)	115 (46.11)	125 (51.67)
BA17NA060–B – High									
30 (–1.11)	TCG	49.90	47.90	45.90	43.90	41.70	39.30	36.50	33.30
	SDT	72.70	81.80	91.10	100.50	109.90	119.20	128.50	137.70
	KW	2.48	2.75	3.06	3.41	3.81	4.27	4.78	5.36
35 (1.67)	TCG	55.00	52.80	50.70	48.60	46.20	43.60	40.60	37.10
	SDT	74.30	83.40	92.60	101.90	111.20	120.40	129.60	138.80
	KW	2.54	2.80	3.11	3.46	3.86	4.32	4.85	5.44
40 (4.44)	TCG	60.50	58.20	55.90	53.60	51.00	48.20	44.90	41.30
	SDT	76.00	85.00	94.20	103.40	112.60	121.70	130.80	139.90
	KW	2.60	2.86	3.16	3.51	3.92	4.38	4.91	5.51
45 (7.22)	TCG	66.40	63.90	61.50	59.00	56.20	53.10	49.60	45.70
	SDT	77.80	86.70	95.80	104.90	114.00	123.10	132.10	141.10
	KW	2.67	2.92	3.22	3.57	3.98	4.45	4.98	5.58
50 (10.0)	TCG	72.70	70.10	67.50	64.70	61.70	58.40	54.60	50.40
	SDT	79.70	88.60	97.50	106.50	115.50	124.50	133.40	142.20
	KW	2.75	2.99	3.29	3.64	4.05	4.52	5.05	5.66
55 (12.78)	TCG	79.60	76.70	73.90	70.80	67.60	64.00	59.90	55.40
	SDT	81.80	90.50	99.40	108.30	117.10	126.00	134.80	143.50
	KW	2.83	3.07	3.36	3.71	4.12	4.59	5.13	5.74
60 (15.56)	TCG	86.80	83.80	80.70	77.40	73.90	69.90	65.60	60.80
	SDT	84.00	92.60	101.30	110.00	118.80	127.50	136.10	144.70
	KW	2.91	3.15	3.44	3.79	4.20	4.67	5.21	5.82
BA17NA060–B – Low									
30 (–1.11)	TCG	33.30	32.50	31.00	29.00	26.50	23.70	20.70	17.50
	SDT	66.60	76.30	85.90	95.30	104.70	113.90	123.10	132.30
	KW	1.73	1.97	2.23	2.53	2.87	3.24	3.66	4.13
35 (1.67)	TCG	37.30	36.30	34.70	32.50	29.90	27.00	23.90	20.50
	SDT	67.80	77.50	87.10	96.50	105.70	115.00	124.10	133.30
	KW	1.71	1.95	2.22	2.52	2.86	3.24	3.66	4.13
40 (4.44)	TCG	41.50	40.40	38.60	36.30	33.60	30.50	27.20	23.70
	SDT	69.20	78.80	88.30	97.60	106.90	116.00	125.10	134.30
	KW	1.68	1.93	2.20	2.51	2.85	3.23	3.66	4.13
45 (7.22)	TCG	46.10	44.70	42.80	40.40	37.50	34.30	30.80	27.10
	SDT	70.60	80.20	89.50	98.80	108.00	117.10	126.20	135.20
	KW	1.66	1.91	2.19	2.50	2.84	3.23	3.65	4.13
50 (10.0)	TCG	50.90	49.40	47.30	44.70	41.70	38.30	34.70	30.80
	SDT	72.10	81.50	90.80	100.00	109.20	118.20	127.20	136.30
	KW	1.63	1.89	2.17	2.48	2.83	3.21	3.64	4.12
55 (12.78)	TCG	56.10	54.30	52.10	49.30	46.10	42.50	38.70	34.70
	SDT	73.60	83.00	92.20	101.30	110.40	119.40	128.40	137.30
	KW	1.60	1.86	2.14	2.46	2.81	3.20	3.64	4.11
60 (15.56)	TCG	61.50	59.60	57.10	54.20	50.80	47.00	43.00	38.80
	SDT	75.20	84.40	93.60	102.60	111.70	120.60	129.50	138.40
	KW	1.57	1.83	2.12	2.44	2.79	3.19	3.62	4.10

* AHRI listing applies only to systems shown in Combination Ratings table.

KW – Outdoor Unit Kilowatts Only.

SDT – Saturated Temperature Leaving Compressor (° F)

SST – Saturated Temperature Entering Compressor (° F/° C)

TCG – Gross Cooling Capacity (1000 Btuh)

GUIDE SPECIFICATIONS

GENERAL

System Description

Outdoor-mounted, air-cooled, split-system air conditioner unit suitable for ground or rooftop installation. Unit consists of a hermetic compressor, an air-cooled coil, propeller-type condenser fan, and a control box. Unit will discharge supply air upward as shown on contract drawings. Unit will be used in a refrigeration circuit to match up to a packaged fan coil or coil unit.

Quality Assurance

- Unit will be rated in accordance with the latest edition of AHRI Standard 210.
- Unit will be certified for capacity and efficiency, and listed in the latest AHRI directory.
- Unit construction will comply with latest edition of ANSI/ASHRAE and with NEC.
- Unit will be constructed in accordance with UL standards and will carry the UL label of approval. Unit will have c-UL approval.
- Unit cabinet will be capable of withstanding Federal Test Method Standard No. 141 (Method 6061) 500-hr salt spray test.
- Air-cooled condenser coils will be leak tested and pressure tested.
- Unit constructed in ISO9001 approved facility.

Delivery, Storage, and Handling

- Unit will be shipped as single package only and is stored and handled per unit manufacturer's recommendations.

Warranty (for inclusion by specifying engineer)

- U.S. and Canada only.

PRODUCTS

Equipment

- Factory assembled, single piece, air-cooled air conditioner unit. Contained within the unit enclosure is all factory wiring, piping, controls, compressor, refrigerant charge R-410A, and special features required prior to field start-up.

Unit Cabinet

- Unit cabinet, including dense wire coil guard, will be constructed of galvanized steel, bonderized, and coated with a powder coat paint.

Fans

- Condenser fan will be direct-drive propeller type, discharging air upward.

AIR-COOLED, SPLIT-SYSTEM AIR CONDITIONER

BA17NA

2 TO 5 NOMINAL TONS

- Condenser fan motors will be totally enclosed, 1-phase type with class B insulation and permanently lubricated bearings. Shafts will be corrosion resistant.
- Fan blades will be statically and dynamically balanced.
- Condenser fan openings will be equipped with coated steel wire safety guards.

Compressor

- Compressor will be hermetically sealed.
- Compressor will be mounted on rubber vibration isolators.

Condenser Coil

- Condenser coil will be air cooled.
- Coil will be constructed of aluminum fins mechanically bonded to copper tubes which are then cleaned, dehydrated, and sealed.

Refrigeration Components

- Refrigeration circuit components will include liquid-line shutoff valve with sweat connections, vapor-line shutoff valve with sweat connections, system charge of R-410A refrigerant, and compressor oil.
- Unit will be equipped with high-pressure switch, low pressure switch and filter drier for R-410A refrigerant.

Operating Characteristics

- The capacity of the unit will meet or exceed _____ Btuh at a suction temperature of _____ °F/°C. The power consumption at full load will not exceed _____ kW.
- Combination of the unit and the evaporator or fan coil unit will have a total net cooling capacity of _____ Btuh or greater at conditions of _____ CFM entering air temperature at the evaporator at _____ °F/°C wet bulb and _____ °F/°C dry bulb, and air entering the unit at _____ °F/°C.
- The system will have a SEER of _____ Btuh/watt or greater at DOE conditions.

Electrical Requirements

- Nominal unit electrical characteristics will be _____ v, single phase, 60 hz. The unit will be capable of satisfactory operation within voltage limits of _____ v to _____ v.
- Unit electrical power will be single point connection.
- Control circuit will be 24v.

Special Features

- Refer to section of this literature identifying accessories and descriptions for specific features and available enhancements.

SYSTEM DESIGN SUMMARY

1. Intended for outdoor installation with free air inlet and outlet. Outdoor fan external static pressure available is less than 0.01-in. wc.
2. This product is not qualified for low ambient cooling operation (below 55°F/12.8°C) and no low ambient kit is available.
3. The maximum outdoor operating ambient in cooling mode is 125°F (51.67°C) when operating voltage is 230v. For 208v applications, the maximum outdoor ambient is 120°F (48.9°C).
4. For reliable operation, unit should be level in all horizontal planes.
5. For interconnecting refrigerant tube lengths greater than 80 ft (23.4 m) and/or 35 ft (10.7 m) vertical differential, consult Residential Piping and Longline Guideline and Service Manual available from equipment distributor.
6. If any refrigerant tubing is buried, provide a 6 in. (152.4 mm) vertical rise to the valve connections at the unit. Refrigerant tubing lengths up to 36 in. (914.4 mm) may be buried without further consideration. Do not bury refrigerant lines longer than 36 in. (914.4 mm).
7. Use only copper wire for electric connection at unit. Aluminum and clad aluminum are not acceptable for the type of connector provided.
8. Do not apply capillary tube indoor coils to these units.
9. Factory-supplied filter drier must be installed.