

### Standard Features:

- 4-Way ceiling register with stiffened 1/2" fan shaped louvers for silent operation
- Lever operated multi-shutter damper
- All component parts, rivets, linkage, and handle enclosed in valve to assure trouble-free operation
- Countersunk mounting holes for flush appearance with color matching Phillips Pozi-drive screws
- Rust resistant pre-coat with durable powder finish
- Soft White

### Options:

Face only (151)

Lever operated Opposed Blade Damper (150-0)

Tool operated Opposed Blade Damper (TO-150-0)

2" ADC compliant round collar with bead for ease of installation (150-NLC)

T-20 Tamper Proof Screws





### Finishes:

#### STANDARD COLORS

- Soft White
- Driftwood Tan

#### DESIGNER COLORS

- Black
- Bronze
- Storm Gray
- Cement Gray
- Aluminum Paint
- Coffee Tan
- Warm White
- Glossy White

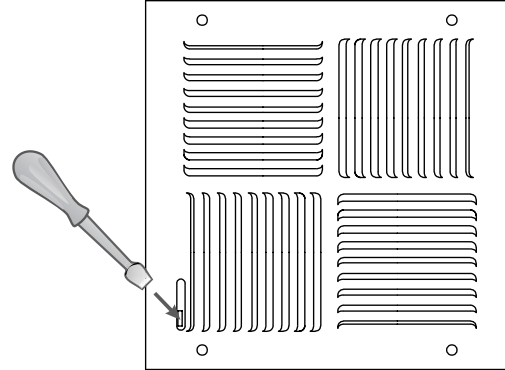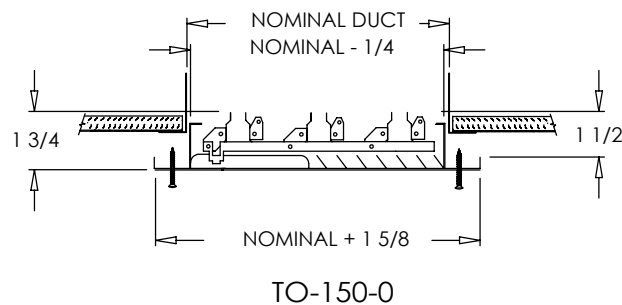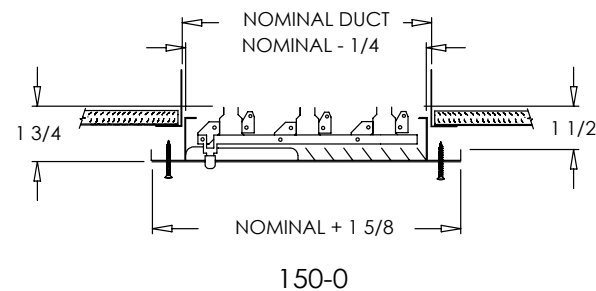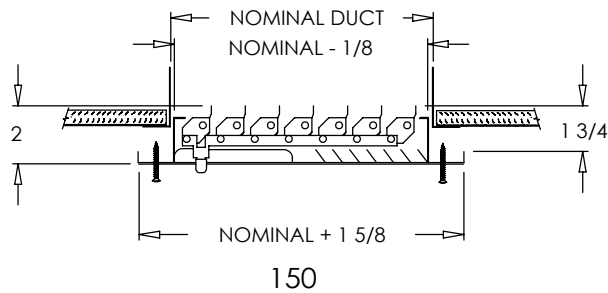

Tool Operated OBD (TO-150-0)

### Additional Information:

### Submittal Notes

Project / Location:

Engineer:

Architect:

Contractor: