



i-Vu® Building Automation System Connect™ BACnet Thermostat

Part number: 33CONNECTSTAT43



Carrier's Connect™ BACnet thermostat offers control of your building's heating, ventilating and air-conditioning (HVAC) system via Wi-Fi® to Connect's Smartphone mobile App as well as from any BACnet-compliant building management system (BMS), including Carrier's i-Vu® building automation system.




Hardware Features

- **Color Capacitive Touchscreen:** 4.3" vibrant full-color LCD swipe and scroll screen that's easy to navigate and view from any angle
- **BACnet:** MS/TP port for easy integration with i-Vu system or any BACnet-compliant BMS
- **Sensors:** Onboard Temperature and Humidity
- **Direct Wi-Fi® Access:** Easily connect to your building's network
- **Slim Profile:** Blends easily into any building's decor and environmental surroundings

Application and System Features

- **Display:** Celsius or Fahrenheit
- **Applications:** Supports up to 4 heating and 3 cooling stages with various new or existing HVAC equipment with 24 VAC control
- **7-Day Scheduling:** Precisely adjust optimum comfort setpoints to achieve energy savings
- **Demand Response Ready:** For participation in local demand response programs
- **Over-the-Air Software Updates:** Directly sent over Wi-Fi network without having to manually check for updates
- **Control:** Make basic temperature, comfort and efficiency adjustments easily and quickly
- **Alerts:** Notification through SMS text and eMail of any critical issues
- **Embedded Contractor Info:** Lets you know who to contact for service
- **Local Access Security:** Provides selective access for authorized individuals
- **Smartphone App and Web Portal:** Configure using your internet-connected Smartphone, PC or Tablet from anywhere or anytime... in real time

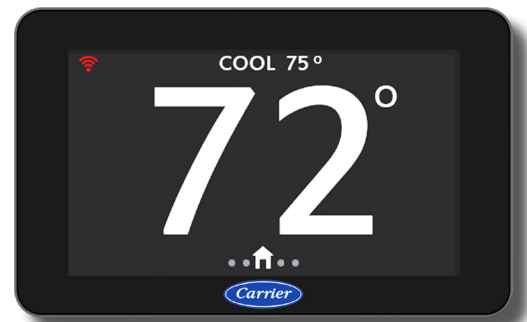

Visit connectstat.carrier.com and create an account.

i-Vu® Building Automation System Connect™ BACnet Thermostat


Part number: 33CONNECTSTAT43



Specifications

Power Requirements	R,C 24 Vac 50/60 Hz @ 6VA
Communication	A+, B BACnet: MS/TP with baud rates up to 115.2 kbps. Max 127 devices. Wi-Fi®: 802.11 a/b/g/n
Real-Time Clock	Real-time clock keeps track of time in the event of a power failure for up to 7 days.
Display	Color Capacitive Backlit Touchscreen, °F or °C Selectable
Input	S1-S2 Remote Temperature Sensor 10K Type II. Software selectable for: Remote Temperature (33ZCT55SPT) Outside Air Temperature (33ZCSENOAT) Duct Temperature (33ZCSENSAT)
Outputs	G,W1,W2,Y1,Y2,Y3,O Minimum Load = 1000 ohms Maximum Load = 1.25 A, 50% power factor
Environmental Operating Range	32° to 104°F (0° to 40°C), 10 to 95% relative humidity, non-condensing
Compliance	FCC Part 15, Subpart J compliant Title 24 compliant IECC 2015 compliant
Physical	Dimensions: (H x W x D): 3.23 in. (82mm) x 5.13 in. (130mm) x .94 in. (24mm) Weight: approximately .75 lb (340g) Lead-free design
Mounting	Wall mount on a standard 4" x 2-1/2 x 2" electrical box

Get the 'Carrier Connect Thermostat' App at:

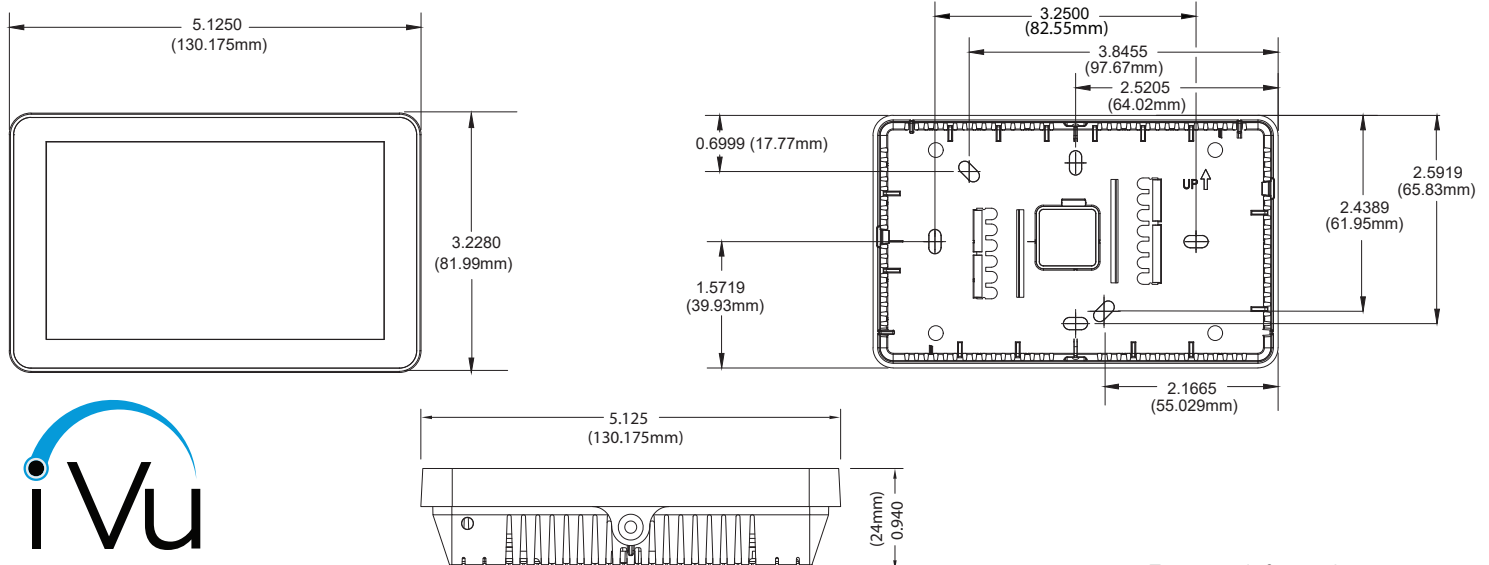

©Carrier 2020. All Rights Reserved. Cat. No. 11-808-798-01 Rev. 1/21

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs, without notice and without incurring obligations. Trademarks are properties of their respective companies and are hereby acknowledged.

For more information, contact
your local Carrier Controls Expert.

Controls Expert Locator:
www.carrier.com/controls-experts