



T150

Pro1 Technologies

P.O. Box 3377
 Springfield, MO 65804
 Toll Free : 888-776-1427
 Web: www.pro1iaq.com
 Hours of Operation: M-F 9AM - 6PM Eastern


Table of Contents	Page
Specifications	2
Installation	3-4

Need Help?

For assistance with this product please visit <http://www.pro1iaq.com> or call Pro1 Customer Care toll-free at 888-Pro1iaq (776-1427) during normal business hours (Mon-Fri 9 AM - 6 PM Eastern)

T150 Thermostat Guard

Our thermostat guard is fit to cover and protect any thermostat in our line. We have also sized it to fit most of the modern controls of todays industry. It was designed with ease, simplicity and versatility in mind. It can be installed without removing an existing thermostat from the wall, and can be mounted horizontally or vertically.

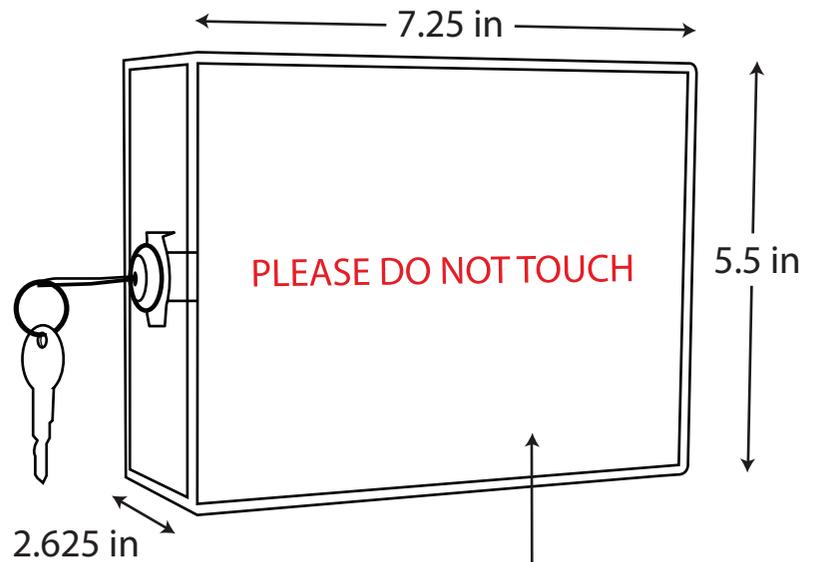

Guard Cover Option
 Using provided adhesive tabs, insert from the back to display the pre-printed card -
 "PLEASE DO NOT TOUCH"
 Or you can customize it to display your own message.

1 ® U.S. Registered Trademark. Patents pending
 Copyright © 2018 All Rights Reserved.

Rev. 1809


2

Installation

Installation

Installation Steps

1. Place the base of the guard around the thermostat centered and level.
2. Mark the wall at the 4 mounting holes with a pen or pencil.
3. Mount the guard base using the 4 anchors and screws provided, with the locking tab on the side you wish the lock to be on.
4. Place the guard onto it's base and securely lock into place.

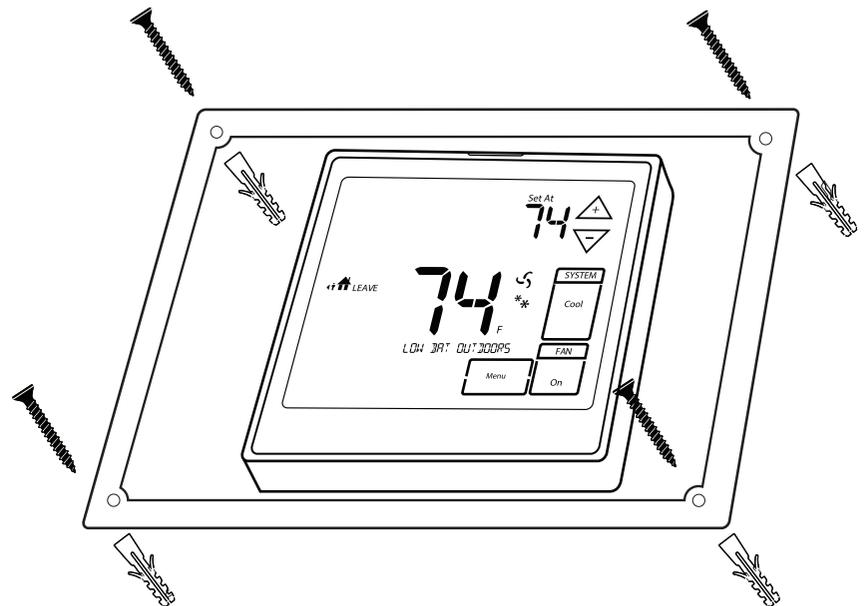

Installation Tip:

When using this or any thermostat guard, the thermostat will experience a decrease in temperature dissipation due to reduced airflow. To compensate for this when using a Pro1 Thermostat, we recommend you adjust the swing setting to its tightest setting (.2° F).

3

4