



i-Vu® Building Automation System VAV Zone II Secondary Terminal

Part Number: OPN-SECTRM-02



The i-Vu® Building Automation System provides everything you need to access, manage, and control your building, including the powerful i-Vu user interface, plug-and-play BACnet controllers, and state-of-the-art Carrier equipment.

The VAV Zone II Secondary Terminal controller provides control of a secondary zone damper where CFM measurement is required. This advanced controller features a separable actuator for easy installation onto a zone damper. It requires connection to the programmable Carrier Zone Controller (OPN-B3-P-02) for proper operation.

Application Features


- Dual Duct - Hot Deck / Cold Deck control
- DOAS applications
- Quick and easy test & balancing process

System Benefits


- Fully plug-and-play with the Carrier i-Vu Building Automation System
- Connects directly to the ACTnet bus on Carrier ZoneCtrl II programmable zone controller

Hardware Features

- Separable brushless actuator for reliability and longevity
- ACTnet Communications bus
- Precision differential pressure sensor

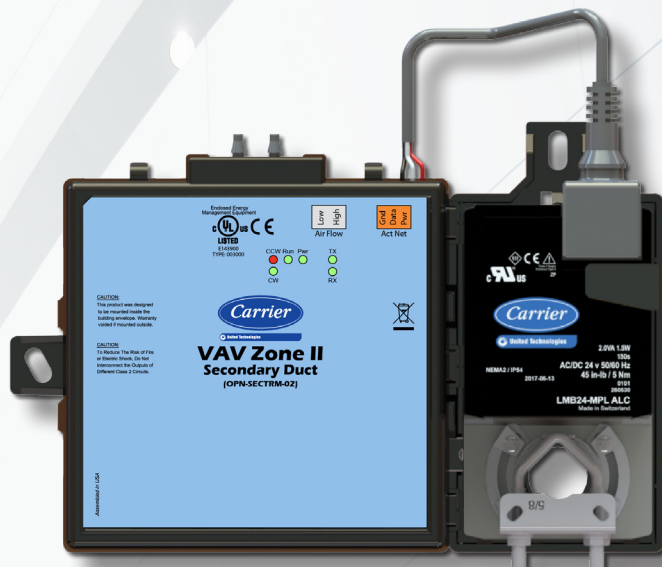

The i-Vu Building Automation System

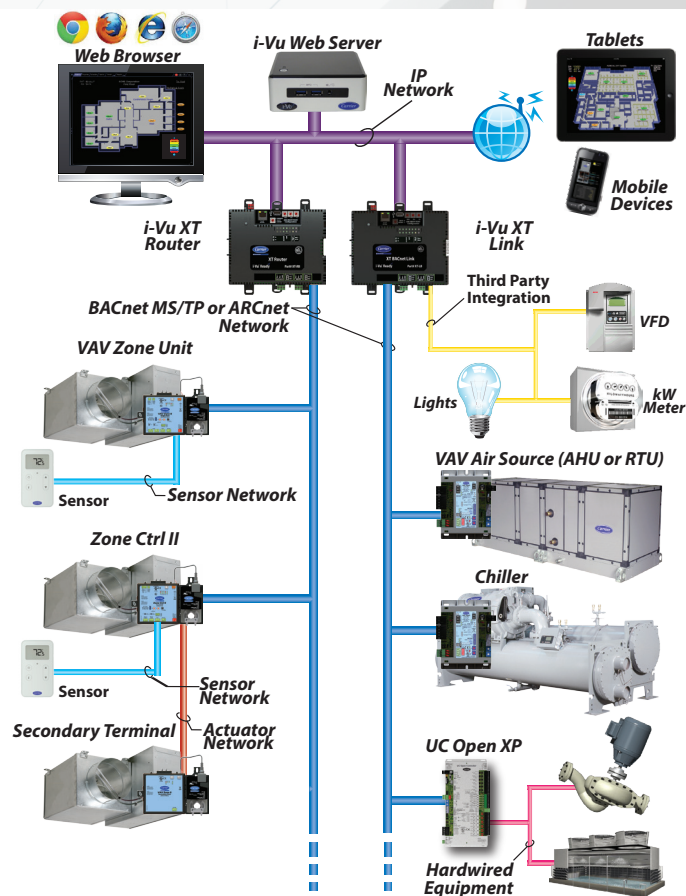



i-Vu® Building Automation System VAV Zone II Secondary Terminal

Part Number: OPN-SECTRM-02

Communication Ports	ACTnet Port: For connecting the actuator cable and to the ZoneCtrl II
Separable Actuator	Brushless DC motor, torque 45 inch-pounds (5Nm), runtime 205 seconds for 90 degree travel during control
Integral Pressure Sensor	Precision low flow AWM series 0–2 in. H ₂ O, sensitive down to ±0.001 in. H ₂ O. Barbed tapered airflow connections accept 3/16 in. (4.75 mm) I.D. tubing. Allows for readings across the 0–2 in. H ₂ O range, accurate to ±5% of full flow at 2 in. H ₂ O
Protection	Incoming power and network connections are protected by non-replaceable internal solid state polyswitches that reset themselves when the condition that causes a fault returns to normal. The power, network, input, and output connections are also protected against voltage transient and surge events lasting no more than 10 msec.
Status Indicators	LED status indicators for communication, run status, error, power, and motor direction
Listed by	UL-916 (PAZX), cUL-916 (PAZX7), FCC Part15-Subpart B-Class A, CE EN50082-1997, UL94-5VA plenum rated enclosure
Environmental Operating Range	Operating: 32 to 130°F (0 to 54°C) 10 to 90% RH, non-condensing Storage: -24 to 140°F (-30 to 60°C) 0 to 90% RH, non-condensing
Power Requirements	24VAC ± 10%, 50-60Hz, 14 VA power consumption 26VDC (25V min, 30V max), Single Class 2 source only, 100 VA or less

Dimensions

Overall

A: 5.10" (12.95 cm)

B: 8.93" (22.68 cm)

C: 5.87" (14.90 cm)

Mounting

D: 7.00" (17.78 cm)

E: 4.89" (12.42 cm)

F: 1.04" (2.64 cm)

G: 1.46" (3.71 cm)

H: 2.55" (6.48 cm)

I: 0.58" (1.47 cm)


Depth: 2.5" (6.4 cm)

Weight: 1.8 lbs (0.82 kg)

Minimum Shaft Diameter: 3/8" (.95 cm)

Maximum Shaft Diameter: 1/2" (1.27 cm)

Minimum Shaft Length: 1-3/4" (4.45 cm)

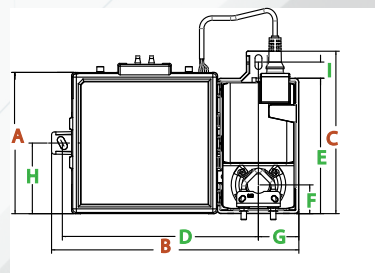

CONTROLS EXPERT

Tested. Certified. Factory Authorized.

**For more information, contact
your local Carrier Controls Expert.**

Controls Expert Locator:
www.carrier.com/controls-experts

© Carrier Corporation Cat. No. 11-808-688-01 11/18
Manufacturer reserves the right to discontinue, or change at any time, specifications or designs, without notice and without incurring obligations. Trademarks are properties of their respective companies and are hereby acknowledged.