



i-Vu® Building Automation System ComfortVu™ BACnet Thermostat

24 Vac Standard Models

Part Numbers: TB-24-C, TB-24-HM-C



Features

- Large, backlit LCD display with push-button occupant controls
- Support for Celsius or Fahrenheit
- BACnet MS/TP port for easy integration with the i-Vu system or any BACnet-compliant BMS
- On-board DIP switches to configure equipment type and sequence of operation
- 2 universal inputs, 2 universal outputs and 4 relay outputs
- Available in two 24 Vac models: Temperature only (#TB-24-C) and Temperature/Humidity/PIR Motion (#TB-24-HM-C)

Supported Functions

- Manage 7-day schedules via the thermostat
- Manage setpoints, occupancy status, fan speed, and heating/cooling mode via the thermostat or BACnet BMS
- Support for Title 24 demand response/economizer FDD and IECC2015 economizer FDD when connected to a BMS

Equipment Compatibility


- Rooftop Units
- Heat Pumps
- Fan Coils
- Unit Heaters

Supported Applications (depends on available I/O)

- Up to 3 stages of heat / 2 stages of cool / up to 3 fan speeds
- 2 pipe / 4 pipe cooling / heating valves (0-10V)
- VFD (0-10V)
- Economizer (open/close)
- Reversing valve
- Humidifier (0-10V) / Reheat (dehumidify)



Carrier's ComfortVu™ BACnet thermostats offer local control of a building's heating, ventilating and air-conditioning (HVAC) system as well as remote control from any BACnet-compliant building management system (BMS), including Carrier's i-Vu® building automation system.

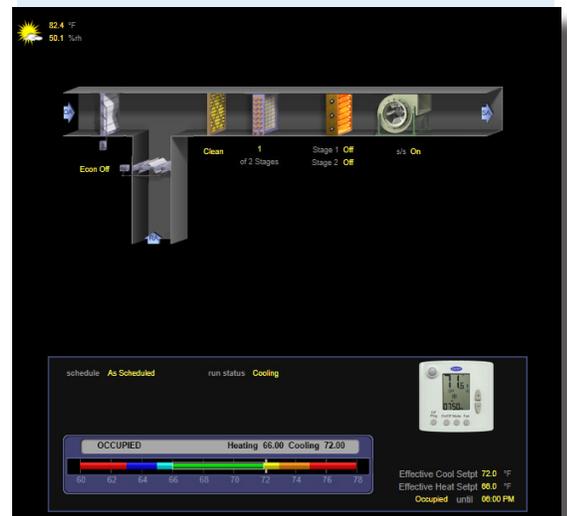

Seamless integration with the i-Vu® building automation system makes it easy to view, schedule, and manage the connected HVAC system.

i-Vu[®] Building Automation System

ComfortVu[™] BACnet Thermostat



24 Vac Standard Models

Part Numbers: TB-24-C, TB-24-HM-C


Specifications

Power Requirements	24 Vac ±15%: 4VA unit, 76 VA full load												
Communication	BACnet MS/TP with baud rates up to 76.8 kbps, detected and set automatically by the BACnet Thermostat. Max 127 devices.												
Real-Time Clock	Real-time clock keeps track of time in the event of a power failure for up to 7 days.												
Display	Backlit segmented LCD, °F or °C Selectable												
Sensing Element	<table border="0"> <tr> <td>Temperature</td> <td>Range</td> <td>41° to 95°F (5° to 35°C)</td> </tr> <tr> <td></td> <td>Accuracy</td> <td>±1.0°F (0.5°C)</td> </tr> <tr> <td>Humidity</td> <td>Range</td> <td>10% to 90%</td> </tr> <tr> <td></td> <td>Accuracy</td> <td>±3.0% typical</td> </tr> </table>	Temperature	Range	41° to 95°F (5° to 35°C)		Accuracy	±1.0°F (0.5°C)	Humidity	Range	10% to 90%		Accuracy	±3.0% typical
Temperature	Range	41° to 95°F (5° to 35°C)											
	Accuracy	±1.0°F (0.5°C)											
Humidity	Range	10% to 90%											
	Accuracy	±3.0% typical											
Motion Sensing	Sensor Type: PIR, quad, omnidirectional Distance: 16.4 feet (5 m) Detection range: (HxV) 90° x 30° Movement speed: 2.62 to 3.94 ft/s (0.8 to 1.2 m/s) Detection object: 15.75 x 9.84 in. (400 x 250 mm)												
Inputs	<p>T1, 0 – Normally open or normally closed dry contract, or 50 kOhm thermistor @ 25°C</p> <p>A, B - Communication +/- (RS485)</p> <p>In1, 0 - Normally open or Normally closed dry contract, or 50 kOhm thermistor @ 25°C</p> <p>C, R - Power: 24 Vac for part numbers TB-24-C and TB-24-HM-C, or 110-220 Vac line voltage for part numbers TB-C and TB-HM-C</p>												
Outputs	11, 12, 13 – Digital outputs, 3A; 14 – Digital outputs 0.3A; 15, 16 - Digital Output 0.3A or Analog output 0-10 Vdc, 5 mA max., not isolated (normally closed valves)												
Environmental Operating Range	50° to 122°F (10° to 50°C), 10 to 90% relative humidity, non-condensing												
Compliance	United States of America: FCC CFR47, Chapter 1, Subchapter A, Part 15, Class B Canada: Industry Canada Compliant, ICES-003, Class B Europe: CE-Mark Low Voltage Directive: 2014/35/EU RoHS Compliant: 2011/65/EU Australia and New Zealand: C-Tick Mark, AS/NZS 61000-6-3 CA Prop 65 Warning: This product can expose you to chemicals including Styrene and 1,3 – Propane sultone, which are known to the State of California to cause cancer. Go to www.p65warnings.ca.gov												
Physical	Fire-retardant plastic ABS, UL94V-0												
Mounting	Wall mount on a standard 4" x 2" electrical box using provided 6/32 x 1/2" mounting screws and wall plate												

Dimensions

Overall

Weight: 4.8 oz (0.14 kg)

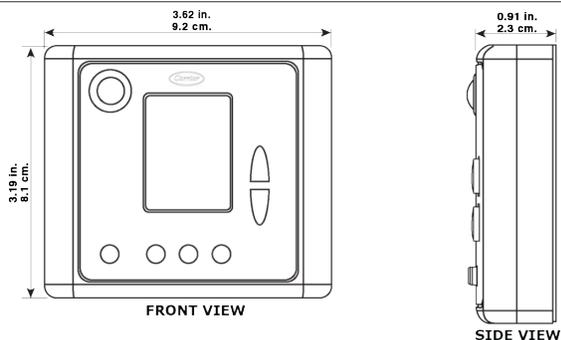

For more information, contact your local Carrier Controls Expert.

Controls Expert Locator:

www.carrier.com/controls-experts