

5

4

3

2

1





C

C

B

B

A

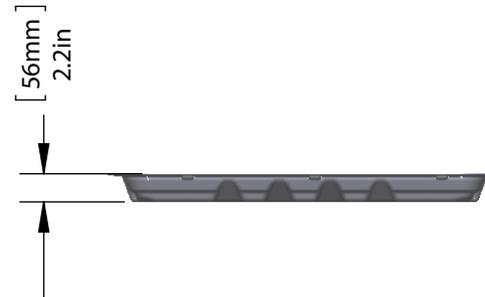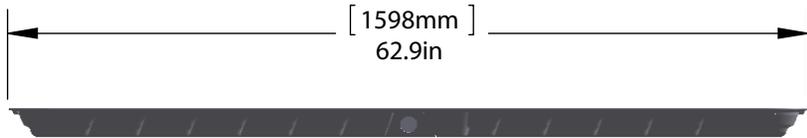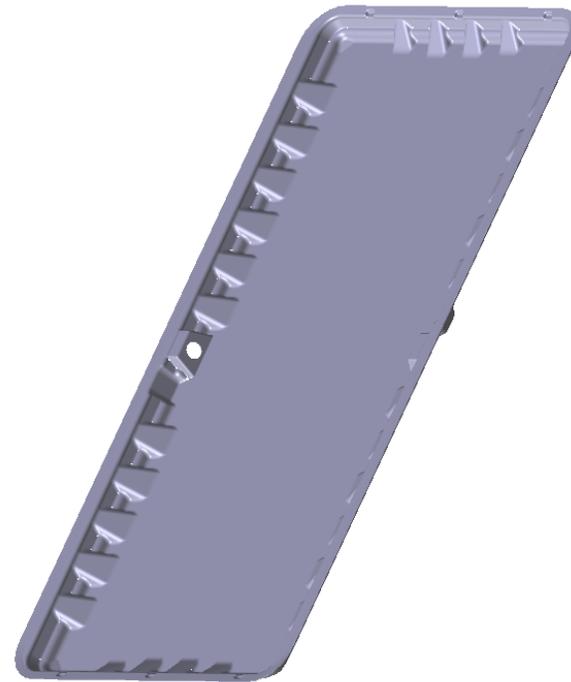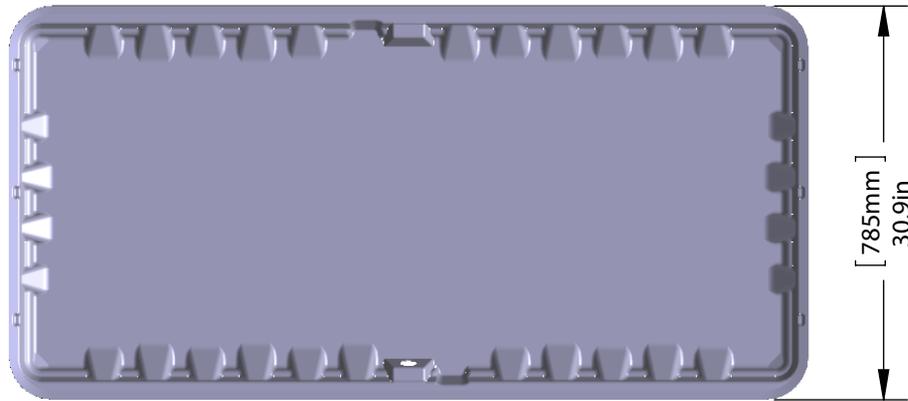

NOTES:

- Extreme Temperature Durability (-40°F to 260°F).
- High Tensile Strength.
- Crack/Split/Leak/Rust Resistant.
- Self Extinguishing.
- Made With Pride in the USA

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
 TOLERANCES:
 FRACTIONAL ±.032
 ANGULAR: MACH ±.5° BEND ±2°
 TWO PLACE DECIMAL ±.010
 THREE PLACE DECIMAL ±.005

INTERPRET GEOMETRIC TOLERANCING PER: ANSI Y14.5, 2009

ENGINEERING	NAME	DATE
DRAWN BY ENG.	JK	05/01/12
CHECKED BY ENG.	ES	05/01/12
ENG APPR.	CC	05/01/12
MFG APPR.	CC	05/01/12

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF RECTORSEAL. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF RECTORSEAL IS PROHIBITED.



2601 Spenwick Drive,
 Houston, TX 77055
 800-231-3345

TITLE:

AG-T 30x62 SPECIFICATION SHEET

SIZE
A

SCALE: 1:15

SHEET 1 OF 1

5

4

3

2

1