

Heavy duty switch terminal blocks with blade

Screw clamp, 1 1/2 DIN 1-3

Screw
clamp

1

M 4/6.SNB - 4 mm² blocks - 6 mm .238" spacing

Characteristics

		IEC NFC DIN	UL	CSA
Wire size mm ² / AWG	Solid	0.5 - 4	22-10 AWG	20-12 AWG
	Stranded	0.5 - 2.5		
Voltage	V	400	300	300
Current	A	20	10	10
Rated wire size	mm ² / AWG	4 mm ²	10 AWG	12 AWG
Wire stripping length	mm / inches	9.5 mm / .37"		
Recommended torque	Nm / lb.in	0.5-0.6 Nm / 4.4-5.3 lb.in		

Selection

Description	Type	Order P/N	Packaging
Standard block grey / orange	M 4/6.SNB	0115 986.00	50
Standard block grey / orange + Test Ø 2mm	M 4/6.SNBT	0115 987.01	50

Accessories

End stop	BAM2 9.9 mm	0206 351.16	50
End section grey	FEM62 3 mm	0114 994.07	20
Shield connector	CBM5 0.5 mm	0178 745.14	50
	CBM8 0.8 mm	0178 746.15	50

M 4,6 SNBT... - 4 mm² blocks - 6 mm .238" spacing

Characteristics


		IEC NFC DIN	UL	CSA
Wire size mm ² / AWG	Solid	0.5 - 4	22-10 AWG	—
	Stranded	0.5 - 4		
Voltage	V	320	300	—
Current	A	20	10	—
Rated wire size	mm ² / AWG	4 mm ² /A4	10 AWG	—
Wire stripping length	mm / inches	9.5 mm / .374"		
Recommended torque	Nm / lb.in	0.5-0.6 Nm / 4.4-5.3 lb.in		

Selection

Description	Type	Order P/N	Packaging
Grey / Orange	M 4/6.SNBT.23	0206 538.02	50


Accessories

End stop	BAM2 9.9 mm	0206 351.16	50
End section grey	FEM62 3 mm	0114 994.07	20
Shield connector	CBM5 0.5 mm	0178 745.14	50
	CBM8 0.8 mm	0178 746.15	50

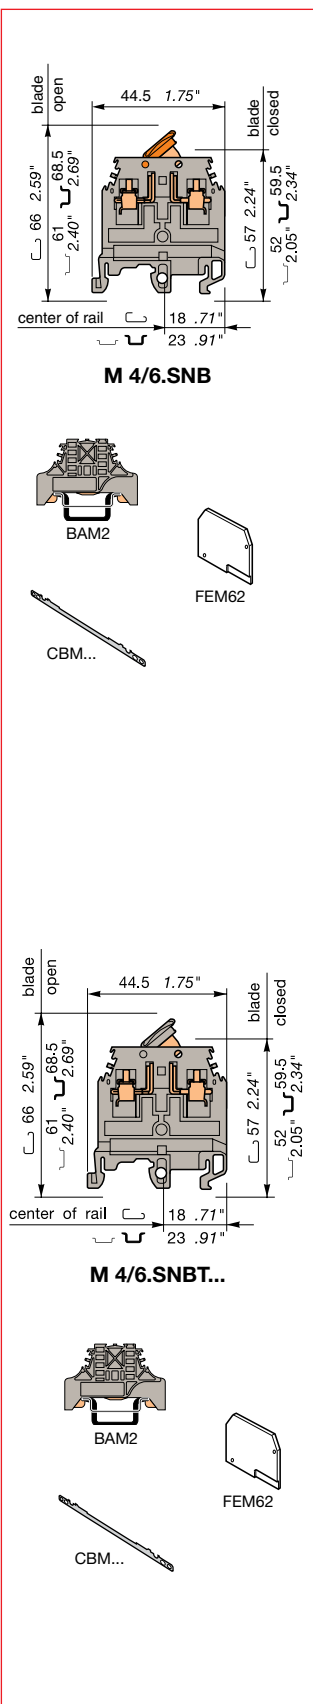


Heavy duty switch terminal blocks

Screw clamp, DIN 1-3



M 6/8.SNB



M 6/8.SNB - 6 mm² blocks - 8 mm .315" spacing - blade switching

Characteristics


		IEC NFC DIN	UL	CSA
Wire size mm ² / AWG	Solid	0.5 - 10	22-8 AWG	20-12 AWG
	Stranded	0.5 - 6		
Voltage	V	400	300	300
Current	A	15	20	10
Rated wire size	mm ² / AWG	6 mm ²	10 AWG	12 AWG
Wire stripping length	mm / inches	12 mm / .47"		
Recommended torque	Nm / lb.in	0.8-1 Nm / 7.1-8.9 lb.in		

Selection


Description	Type	Order P/N	Packaging
Standard block grey 	M 6/8.SNB	0115 688.25	50

Accessories

End stop			BAM2	9.9 mm	0206 351.16	50	
End section	grey		FEM8	3 mm	0113 373.26	20	
	orange		FEM8	3 mm	0103 230.02	20	
Separator end section			grey		SCFM6 3 mm	0114 825.05	20



M 6/8.STP



M 6/8.STP - 6 mm² blocks - 8 mm .315" spacing - push-turn knob switching

Characteristics

		IEC NFC DIN	UL	CSA
Wire size mm ² / AWG	Solid	0.5 - 10	22-8 AWG	8 AWG
	Stranded	0.5 - 6		
Voltage	V	500	600	600
Current	A	15	40	15
Rated wire size	mm ² / AWG	6 mm ²	8 AWG	8 AWG
Wire stripping length	mm / inches	11 mm / .433"		
Recommended torque	Nm / lb.in	0.8-1 Nm / 7.1-8.9 lb.in		

Selection

Description	Type	Order P/N	Packaging
Standard block grey 	M 6/8.STP	0115 277.20	25
Bloc with Ø4mm test socket grey 	M 6/8.STP 1	0115 529.15	25

Accessories

End section			BAM2 9.9 mm	0206 351.16	50
Separator end section	grey		FEMT1 2.8 mm	0113 137.02	50


Heavy duty switch and fuse holder terminal blocks

Double-deck

Screw clamp, DIN 1 - DIN 3

Screw clamp

1

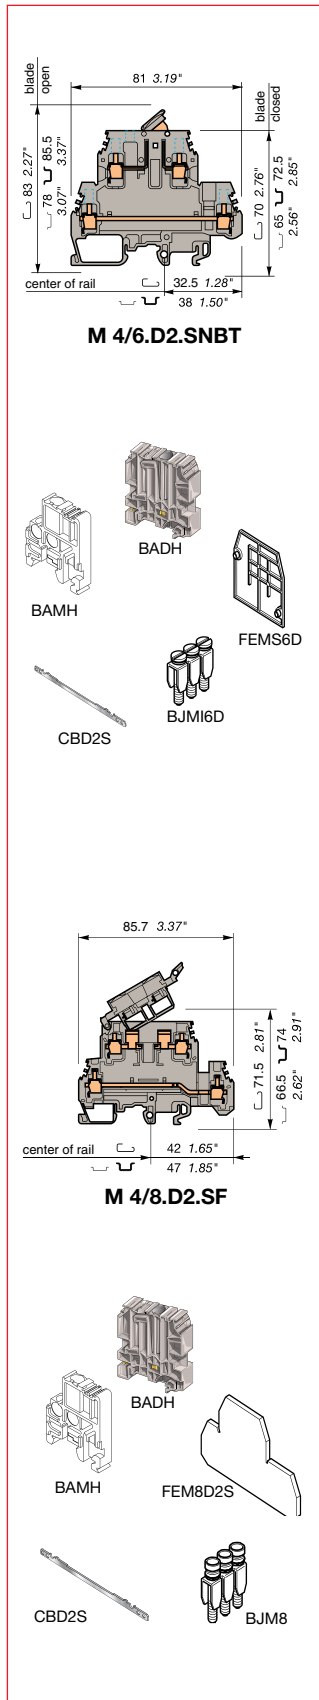

M 4/6.D2.SNBT - 4 mm² blocks - 6 mm .238" spacing - blade switch

Characteristics

Wire size mm ² / AWG	Solid Stranded	IEC NFC DIN	UL	CSA
		0.5 - 4	24-12 AWG	22-12 AWG
Voltage	V	400	300	300
Current	A	10	15	15
Rated wire size	mm ² / AWG	4 mm ²	12 AWG	12 AWG
Wire stripping length	mm / inches	9.5 mm / .374"		
Recommended torque	Nm / lb.in	0.5-0.6 Nm / 4.4-5.3 lb.in		

Selection

Description	Type	Order P/N	Packaging
Standard block grey	■ M 4/6.D2.SNBT	0115 561.15	50

Accessories

End stop		BADH 12 mm	0116 900.27	50
		BAMH 9.1 mm	0114 836.00	50
End section	Grey ■ FEMS6D 1.5 mm		0116 591.05	20
Assembled jumper bar (with IP20 protection)	2 poles	BJMI6D 32 A ①	0179 668.20	10
	3 poles	BJMI6D 32 A ①	0179 669.21	10
	4 poles	BJMI6D 32 A ①	0179 670.26	10
	5 poles	BJMI6D 32 A ①	0179 671.13	10
	10 poles	BJMI6D 32 A ①	0179 672.14	10
Shield connector	CBD2S		0178 408.14	50

M 4/8.D2.SF - for fuses 5x20 mm .197x.787 in. and 5x25 mm .197x.984 in. - 4 mm² blocks - 8 mm .315" spacing

Characteristics

Wire size mm ² / AWG	Solid Stranded	IEC NFC DIN	UL	CSA
		0.5 - 6 0.5 - 4	24-12 AWG	24-12 AWG
Voltage	V	630 ②	300 ②	300 ②
Current	A	6.3	20	20
Rated wire size	mm ² / AWG	4 mm ²	12 AWG	12 AWG
Wire stripping length	mm / inches	9.5 mm / .37"		
Recommended torque	Nm / lb.in	0.5-0.8 Nm / 4.4-7.1 lb.in		

Selection

Description	Type	Order P/N	Packaging
Standard block grey	■ M 4/8.D2.SF	0115 604.21	50
Standard block beige V0	■ M 4/8.D2.SF.V0	0195 604.22	50

Accessories

End stop		BADH 12 mm	0116 900.27	50
		BAMH 9.1 mm	0114 836.00	50
End section	grey ■ FEM8D2S 1.5 mm		0116 913.07	20
Assembled jumper bar (with IP20 protection)	2 poles	BJM8D 41 A ①	0168 520.05	10
	3 poles	BJM8D 41 A ①	0168 521.22	10
	4 poles	BJM8D 41 A ①	0168 522.23	10
	5 poles	BJM8D 41 A ①	0168 528.24	10
	10 poles	BJM8D 41 A ①	0168 974.00	10
Shield connector	CBD2S		0178 408.14	50


① Lower deck only.

② Insulation voltage of terminal block - operating voltage : according to fuse.


Fuse holder terminal blocks

5x20 mm .197x.787 in. and 5x25 mm .197x.984 in.


Screw clamp, C U DIN 1 - DIN3





M 4/8.SF



M 4/8.SFL



M 4/8.SN

M 4/8.SF- 4 mm² blocks - 8 mm .315" spacing

Characteristics

Characteristics		IEC NFC	DIN	UL	CSA
Wire size mm² / AWG	Solid	0.5 - 6		22-12 AWG	22-12 AWG
	Stranded	0.5 - 4			
Voltage	V	630	①②	600 ①	250
Current	A	6.3		10	10
Rated wire size	mm² / AWG	4 mm²		12 AWG	12 AWG
Wire stripping length	mm / inches	9.5 mm / .37"			
Recommended torque	Nm / lb.in	0.5-0.8 Nm / 4.4-7.1 lb.in			

Selection

Description	Type	Order P/N	Packaging
Standard block grey	☐ M 4/8.SF	0115 657.25	50
Block with test socket Ø2 mm grey	☐ M 4/8.SF	0115 662.22	50
Standard block orange	☐ M 4/8.SF2	0105 135.11	50
Standard block beige V0	☐ M 4/8.SF.V0	0195 657.26	50

M 4/8.SFL - 4 mm² blocks - 8 mm .315" spacing

Characteristics

Characteristics		IEC NFC	DIN	UL	CSA
Wire size mm² / AWG	Solid	0.5 - 6		22-12 AWG	22-12 AWG
	Stranded	0.5 - 4			
Voltage	V	400		600	250
Current	A	6.3		10	10
Rated wire size	mm² / AWG	4 mm²		12 AWG	12 AWG
Wire stripping length	mm / inches	9.5 mm / .374"			
Recommended torque	Nm / lb.in	0.5-0.8 Nm / 4.4-7.7 lb.in			

Selection

Description	Type	Order P/N	Packaging
Block with fusion indicator neon grey	☐ M 4/8.SFL	0115 661.21	50
Block with fusion indicator 24V grey	☐ M 4/8.SFD	0115 663.23	50

M 4/8.SN - 4 mm² blocks - 8 mm .315" spacing

Characteristics

Characteristics		IEC NFC	DIN	UL	CSA
Wire size mm² / AWG	Solid	0.5 - 6		22-12 AWG	24-12 AWG
	Stranded	0.5 - 4			
Voltage	V	630 ①		600	250
Current	A	6.3		10	10
Rated wire size	mm² / AWG	4 mm²		12 AWG	12 AWG
Wire stripping length	mm / inches	9.5 mm / .37"			
Recommended torque	Nm / lb.in	0.5-0.8 Nm / 4.4-7.1 lb.in			

Selection

Description	Type	Order P/N	Packaging
Standard block grey body/blue grip	☐ M 4/8.SN	0115 659.07	50
Standard block beige body/blue V0 grip	☐ M 4/8.SN.V0	0195 659.00	50

Accessories

End stop			BAM2 9.9 mm	0206 351.16	50
End section	grey		FEM8S 1.5 mm	0116 951.15	20
	orange		FEM8S 1.5 mm	0103 923.15	20

① Insulation voltage of terminal block - operating voltage : according to fuse.

② 400 V for block M 4/6.SFT