

Product

CP-M115/M230

Low Profile, Mini-Split Pump CP-M115, CP-M230




Features

- Compact Size
- Flexible installation options. Fits inside line set covers or inside cassette
- Clear Reservoir
- Dual Outlet Reservoir
- Reservoir Mounting Plate
- Up to 6' Suction Lift - 24' Total Lift
- For systems up to 2.8 tons (34,000 BTUs – 10kW)
- Quiet. < 21dB(A)
- Thermally Protected
- Built-In Overflow Switch – SPDT Alarm Circuit
- 2 Year Warranty
- ETL Listed
- Water Resistant Sensor Cable

Specifications

Voltage	CP-M115: 110-120VAC 60Hz CP-M230: 220-240VAC 50/60Hz
Watts	19W
IP	IP64
Duty Cycle Rating	70%
Sound	<21 dB(A) at 3.3'
Overflow Switch	5A @ 250VAC Resistive
Working Temperature	41°F to 113°F (5°C to 45°C)
Storage Temperature	37°F to 158°F (3°C to 70°C)
ETL	4000786 (Conforms to UL STD 778)
CSA	C22.2 NO. 108

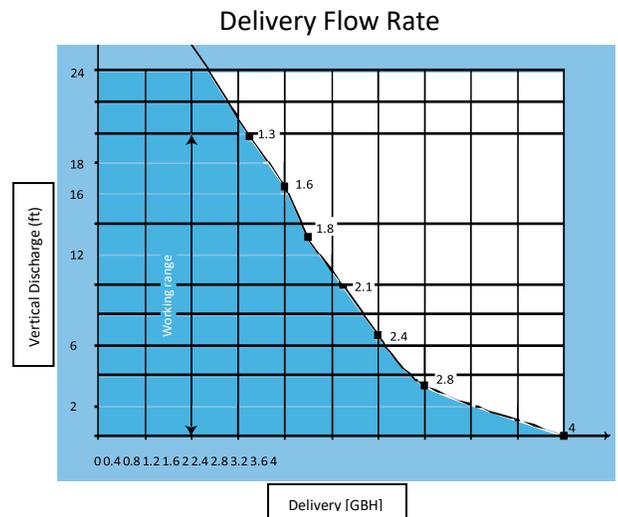

UPC

CP-M230	0095247152759
CSA	0095247152742

Alarm and Mains Connections

