Product

CP-M115/M230

Low Profile, Mini-Split Pump CP-M115, CP-M230



Features

- Compact Size
- Flexible installation options. Fits inside line set covers or inside cassette
- Clear Reservoir
- Dual Outlet Reservoir
- Reservoir Mounting Plate
- Up to 6’ Suction Lift - 24’ Total Lift
- For systems up to 2.8 tons (34,000 BTUs – 10kW)
- Quiet. < 21dB(A)
- Thermally Protected
- Built-In Overflow Switch – SPDT Alarm Circuit
- 2 Year Warranty
- ETL Listed
- Water Resistant Sensor Cable

Delivery Flow Rate

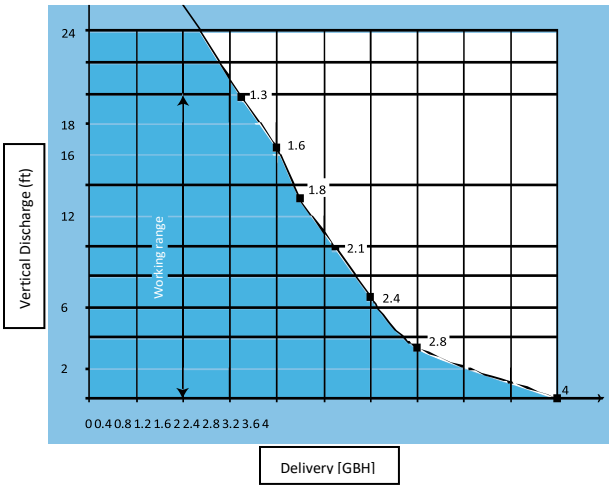

Specifications

Voltage	CP-M115: 110-120VAC 60Hz CP-M230: 220-240VAC 50/60Hz
Watts	19W
IP	IP64
Duty Cycle Rating	70%
Sound	<21 dB(A) at 3.3’
Overflow Switch	5A @ 250VAC Resistive
Working Temperature	41ºF to 113ºF (5ºC to 45ºC)
Storage Temperature	37ºF to 158ºF (3ºC to 70ºC)
ETL	4000786 (Conforms to UL STD 778)
CSA	C22.2 NO. 108

UPC

CP-M230	0095247152759
CSA	0095247152742

Alarm and Mains Connections

