Air Handler Heat Pump Ductless System					
Indoor Model:	40MBABQ36XA3				
	Submit	tal Data			
Job Data:		Location:			
Buyer:	Buyer P.O. #:	Carrier #:			
Unit Number:		Model Number:			
Performance Da	ta Certified By:	Date:			
		STANDARD FEATURES Modes: Cool, Heat, Dry, Fan, Auto 4 way installation (Up flow, Down flow, Right, Left) New Aluminum Coil Automatic Airflow Technology with Static Pressure up to 0.8 inWG Less than 2% air leakage Easy Maintenace Quiet indoor operation Aluminum Hydrophilic pre-coated fins Mireless Remote Controller included with indoor unit 24V Interface for third party thermostat compatibility built-in LIMITED WARRANTY* 10 year limited to original purchaser on compressor and parts upon timely registration, otherwise 5 years *For residential applications. See warranty for full details.			

	System	Size	36		
		Indoor Model	40MBABQ36XA3		
		Voltage, Phase, Cycle	V/Ph/Hz	208/230-1-60	
	Electrical	Power Supply	Indoor unit power	red from outdoor unit	
		MCA	Α.	5	
	Controls	Wireless Remote Controller (°F/°C C	Standard		
	Controis	Wired Remote Controller (°F/°C Con	Standard		
	Operating	Cooling Indoor DB Min -Max	° F (° C)	62~90 (17~32)	
	Range	Heating Indoor DB Min -Max	° F (° C)	32~86 (0~30)	
	Piping	Pipe Connection Size - Liquid	in (mm)	3/8 (9.52)	
		Pipe Connection Size - Suction	in (mm)	5/8 (16)	

	Face Area Sq.		4.88
Indoor Coil	No. Rows	4	
	Fins per inch	20	
	Circuits	10	
	Unit Width	in (mm)	21 (534)
	Unit Height in (r		49 (1245)
	Unit Depth in (r		21 (534)
	Net Weight Ibs (kg)		129.63 (58.8)
	Number of Fan Speeds	4	
Indoor	Airflow (lowest to highest) CFM		865/971/1082/1188
	Cooling Sound Pressure (low to high)		
	Heating Sound Pressure (low to high)	dB(A)	33.9/39.0/45.1
	Max Static Pressure	In.WG.	0.8
	Field Drain Pipe Size O.D.	in (mm)	3/4 (19.1)


For compatible outdoor units see Compatibility Chart

Performance may vary based on the outdoor unit matched to. See compatible outdoor units pages for Performance Data.

Accessories

EHKMB05KN	Electric Heater 5kW
EHKMB08KN	Electric Heater 8kW
EHKMB10KN	Electric Heater 10kW
EHKMB15KN	Electric Heater 15kW
EHKMB20KN	Electric Heater 20kW
DGAPAXXX2020	Infinity® Air Purifier

Construction View

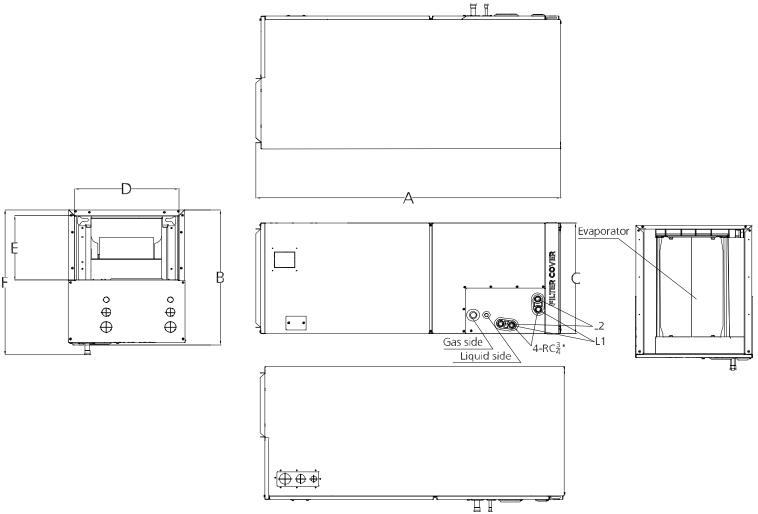

Model	Dimensions				Drain hole			
Woder	A(Height)	B(Depth)	C(Width)	D	E	F	L1	L2
18k~24k	1143	534	445	400	260	585	Main drain	Overflow drain
101 241	45	21	17-1/2	15-3/4	10-1/4	23		
36k-48k	1245	534	534	490	260	585		
30K-40K	49	21	21	19-5/16	10-1/4	23		
60k	1346	534	622	580	260	585		
	53	21	24-1/2	22-7/8	10-1/4	23		



