Air Handler Heat Pu	np Ductless System	
Indoor Model:	40MBABQ48XA3	
	Submitte	al Data
Job Data:		Location:
Buyer:	Buyer P.O. #:	Carrier #:
Unit Number:		Model Number:
Performance Data Certified By:		Date:
		 STANDARD FEATURES Modes: Cool, Heat, Dry, Fan, Auto 4 way installation (Up flow, Down flow, Right, Left) New Aluminum Coil Automatic Airflow Technology with Static Pressure up to 0.8 inWG Less than 2% air leakage Easy Maintenace Quiet indoor operation Aluminum Hydrophilic pre-coated fins Descent Semete Controller included with indoor unit 24V Interface for third party thermostat compatibility built-in IMITED WARRANTY* 10 year limited to original purchaser on compressor and parts upon timely registration, otherwise 5 years *For residential applications. See warranty for full details.

System	Size	Size			
	Indoor Model	Indoor Model			
	Voltage, Phase, Cycle	V/Ph/Hz	208/230-1-60		
Electric	al Power Supply	Indoor unit powe	red from outdoor unit		
	MCA	,	7.5		
Contro	Wireless Remote Controller (°F/°C C	Wireless Remote Controller (°F/°C Convertible)			
Contro	S Wired Remote Controller (°F/°C Controller)	onvertible)	Standard		
Operati	ng Cooling Indoor DB Min -Max	° F (° C)	62~90 (17~32)		
Range	Heating Indoor DB Min -Max	° F (° C)	32~86 (0~30)		
Piping	Pipe Connection Size - Liquid	in (mm)	3/8 (9.52)		
i iping	Pipe Connection Size - Suction	in (mm)	5/8 (16)		


Indoor Coil	Face Area	Sq. Ft.	4.88	
	No. Rows	4		
	Fins per inch	20		
	Circuits	10		
	Unit Width	in (mm)	21 (534)	
	Unit Height	in (mm)	49 (1245)	
	Unit Depth	in (mm)	21 (534)	
	Net Weight Ibs (kg		132.5 (60.1)	
	Number of Fan Speeds	4		
Indoor	Airflow (lowest to highest) CFM		906/1094/1282/1471	
	Cooling Sound Pressure (low to high)	dB(A)	44.6/47.7/51.0/53.7	
	Heating Sound Pressure (low to high)	dB(A)	43.4/47.8/50.5/53.8	
	Max Static Pressure	In.WG.	0.8	
	Field Drain Pipe Size O.D.	in (mm)	3/4 (19.1)	

For compatible outdoor units see Compatibility Chart

Performance may vary based on the outdoor unit matched to. See compatible outdoor units pages for Performance Data.

Accessories

EHKMB08KN	Electric Heater 8kW			
EHKMB10KN	Electric Heater 10kW			
EHKMB15KN	Electric Heater 15kW			
EHKMB20KN	Electric Heater 20kW			
DGAPAXXX2020	Infinity® Air Purifier			

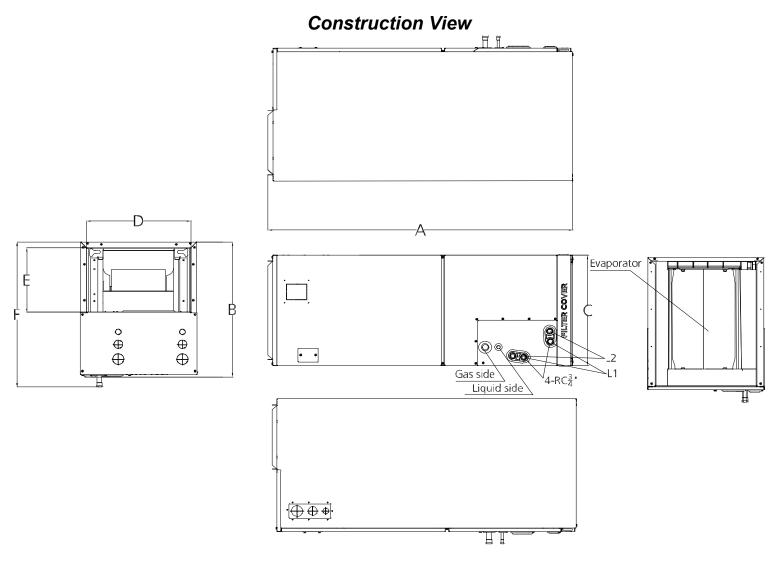

Model	Dimensions			Drain hole				
	A(Height)	B(Depth)	C(Width)	D	E	F	L1	L2
18k~24k	1143	534	445	400	260	585	Main drain	Overflow drain
	45	21	17-1/2	15-3/4	10-1/4	23		
36k-48k	1245	534	534	490	260	585		
	49	21	21	19-5/16	10-1/4	23		
60k	1346	534	622	580	260	585		
	53	21	24-1/2	22-7/8	10-1/4	23		





Copyright 2022 CAC/BDP • 3300 Riverwood Parkway, Atlanta, GA 30144

Edition Date: 03/2022

Catalog No: 40MBAB-48C-01SB