




# MicroMetl

Spec Sheet

CRBK-SPPSMHA-141H

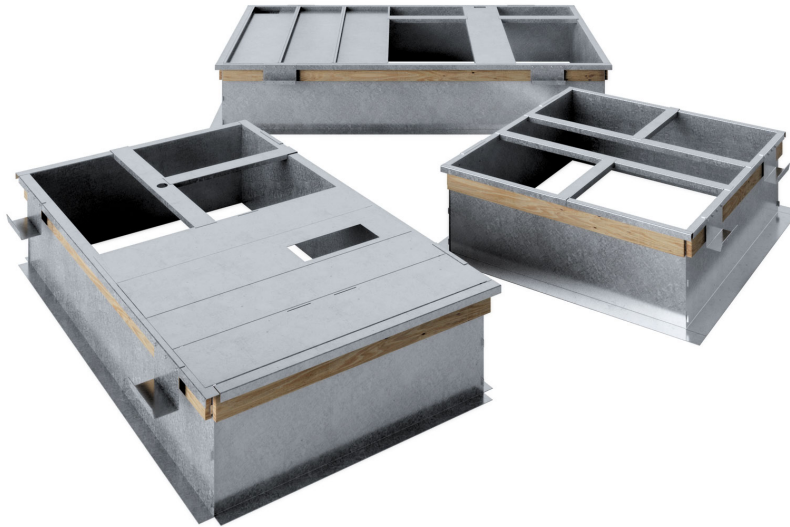

## Refer To Submittal For Dimensions

**Description:** Knockdown Structurally Calculated Curb - 14 Inches Tall Non Insulated Full Perimeter Knockdown Structurally Calculated Curb, California State Standard, High Seismic Criteria, Includes Hold-Down Brackets. "Structurally" Stamped By A Professional Engineer, Without Pitch, Insulated Deck Pan If Applicable, Includes Wood Nailer & Hold Down Brackets. Meets Seismic Requirements for 2022 CBC & 2021 IBC. Wind Design Criteria: 60 Foot Tall Building Maximum, Exposure C, 155 MPH - 3 Second Gust Speed, Risk Category III & IV.

**Weight:** 65lbs/29.48kg

**Assembled Length O.D.:** 46.04

**Assembled Width O.D.:** 30.61

**Corner Type:** N/A

**Composition:** Galvanized Sheet Metal

**Insulated:** Non Insulated

**Perimeter:** Full Perimeter

**Support Gauge:** 16

**Hold Down Gauge:** 14

**Deckpan:** Included

**Deckpan Gauge:** N/A

**Deckpan Description:** Galvanized Metal, Using 1 Inch Insulation, R Value 4.2

**Gasket:** 9430-0100, 9430-0200, 9430-2800

**Gasket Description:** 0.25 X 1.5 Inch Multipurpose Medium Density Foam Gasket. 0.75 X 1.0 Inch Two Pound Polyester Urethane Sealing Gasket.

**Prop 65:** Yes

**Country of Origin:** USA