



SUBMITTAL DATA SHEET



A CSW Industrials Company

Ghost External: Condensate Mini Pumps

100–240V AC 50/60Hz
83939

Project Information:

Job Name:

Location:

Engineer:

Submitted to:

For: ☐ Reference ☐ Approval ☐ Construction

Submitted by:

Reference:

Submittal Information:

Approval:

Date:

Construction:

Unit #:

Drawing #:

I. Ordering Information:

Product Code 83939
Model Ghost External
Carton Qty 1
Carton Weight 1.43

II. Product Specifications:

Pump Type Rotary Diaphragm
Pump Length 6.5"
Pump Width 2.7"
Pump Height 4.2"
Capacity 10.6GPH @ 0' Head / 3.6GPH @ 32.8' Head
Max BTUs 157,000
Max Head in Feet 32.8
Max Temperature 158°F
Water Storage 7.8oz
Sound Level 20dB(A) @ 3.3ft (1M)
Safety Switch 3A NC
Voltage 100–240v
Class Class II Appliance
Protection/Rated IPX5, Continuous, Fully potted
Remote Reservoir N
Plenum Rated N
Variable Speed N
Plug & Play N
Sound level and pump performance varies with voltage frequency.


III. Carton Contents:

- Pump Assembly with Reservoir
- Filter
- Float
- 1A Fuse
- Connection Clamp
- Installation Screw (3x)
- Wall Anchors (3x)
- Anti-siphon Device
- Install Manual

(Fig. I) Product Image:



(Fig. II) Typical Pump Locations:

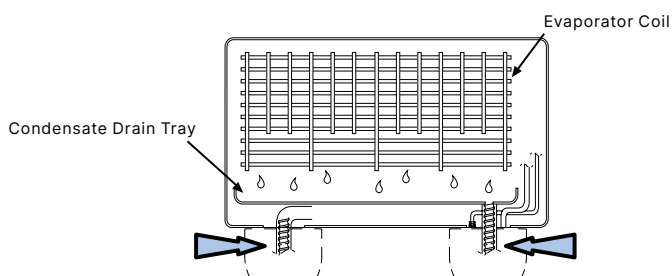

Pump Selector & Wiring Diagrams
Available at rs.today/ghost-pumps




(RectorSeal's products are subject to continuous improvements; RectorSeal reserves the right to modify product design, specifications & information in this data sheet without notice and without incurring any obligations)

Ghost External Condensate Mini Pumps

100–240V AC 50/60Hz
83939

Ghost Pumps BTU Calculator

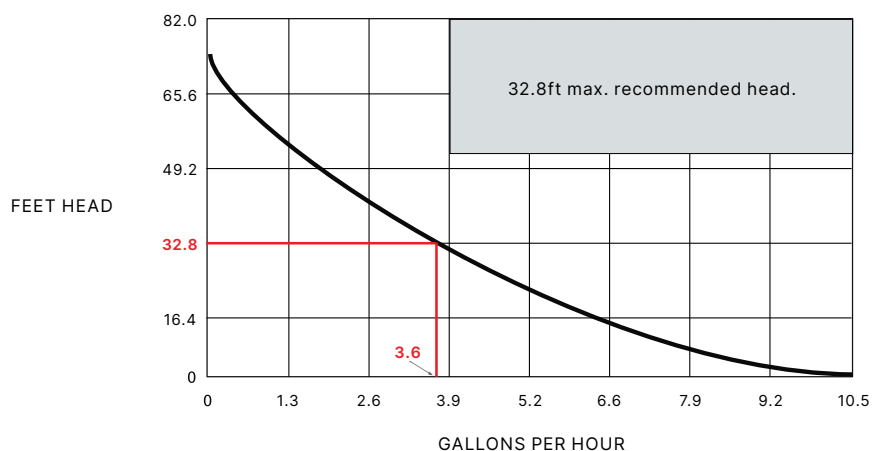

RectorSeal® • 2601 Spenwick Drive • Houston, TX 77055 • 800-231-3345 • rectorseal.com

A CSW Industrials Company. RectorSeal, the logos and other trademarks are property of RectorSeal, LLC, its affiliates or its licensors and are protected by copyright, trademark and other intellectual property laws, and may not be used without permission. RectorSeal reserves the right to change specifications without prior notice.

©2025 RectorSeal. All rights reserved. R50326-2512