PRO1 SUBMITTAL SHEET

Job Name: _____ **Location:** _____ **Date:** _____

Purchaser: _____ **Installer:** _____

Submitted to: _____ **For:** ☐ RNC ☐ R&R ☐ Commercial

MODEL T501M

Single Stage

1 Heat, 1 Cool
24 VAC Mechanical
Non-Programmable

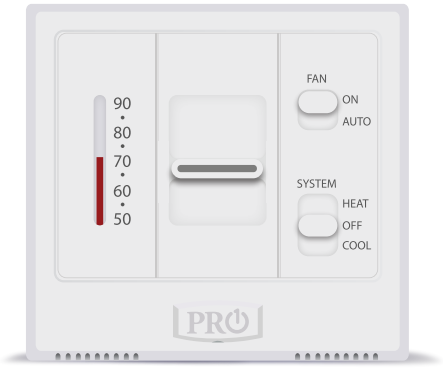

This model features:

- Simple private label badge system
- Mechanical 24 VAC Power
- Three thermostats in one
  - Heat-Off-Cool
  - Heat only with fan
  - Heat only without fan
- 2 Year Warranty
- Removable fan switch
- Mounts on wall or junction box (selectable on or off)
- Universal subbase

Specifications:

Application	1 Heat, 1 Cool
Programmability	Non-Programmable
Changeover	System Switch
Display Range	50˚F to 90˚F (10˚C to 32˚C)
Control Range	50˚F to 90˚F (10˚C to 32˚C)
Display Accuracy	+/- 1˚F
Heat Swing	Adjustable from 0.2˚F to 2.0˚F
Cool Swing	Adjustable from 0.2˚F to 2.0˚F
Terminals	Rc, Rh, G, Y, W, O, B
Load Rating	1 amp per terminal, 1.5 amp maximum all terminals combined
Power Source	24 VAC
Operating Ambient	32˚F to +105˚F (0˚C to +41˚C)
Operating Humidity	90% non-condensing maximum
Mounting	Wall or Junction Box
Dimensions	4.7”W x 4.4”H x 1.3”D (119mm W x 112mm H x 28mm D)
Warranty	2 year warranty